



## A Tallysman Accutenna® TW2106/TW2108 Embedded Precision GPS L1 Antenna

The TW2106 is electronically identical to the TW2105. The TW2106 has a larger PCB with drilled holes for a more secure method of attaching the antenna

The TW2106 employs Tallysman's unique *Accutenna*™ technology in an embedded GPS L1 antenna, specially designed for industrial, agricultural and military precision positioning and timing applications.

The TW2106 features a custom high performance, dual-feed, wide band patch element. Its LNA configuration provides a LNA for each feed, a mid section high rejection SAW for the combined signal, followed by a final stage of LNA. It provides  $\pm 10$ MHz bandwidth centred on 1575.42 MHz and covers all GPS L1, and SBAS (WAAS/EGNOS/MSAS) signals. It features great axial ratio over the entire frequency range (<3dB), excellent circular polarized signal reception, great multipath rejection and out-of-band signal rejection.

The TW2108 has a pre-filter to provide strong protection from near frequencies.

### Applications


- High Accuracy & Mission Critical GPS
- Precision Agriculture, Mining & Construction
- Military & Security
- Avionics
- Law Enforcement & Public Safety
- Fleet Management & Asset Tracking

### Features

- Great axial ratio: <3 dB over full bandwidth
- Low noise LNA: 1 dB
- High rejection SAW filter
- High gain: 26 dB typ.
- Low current: 15 mA typ.
- ESD circuit protection: 15 KV
- Wide voltage input range: +2.5 to 16 VDC
- Small form factor



TW2106 Dimensions (mm)

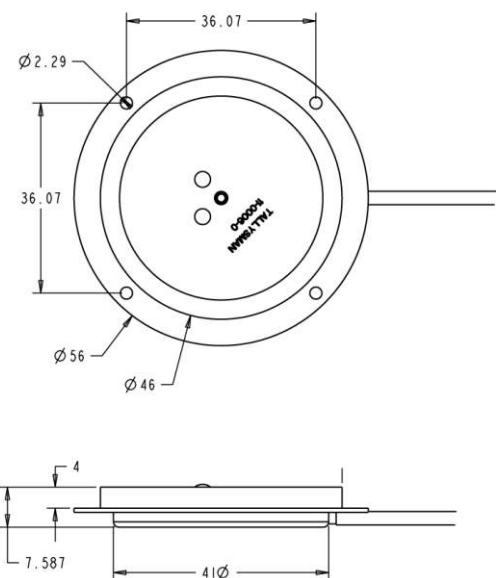

### Benefits

- Excellent multipath rejection
- Increase system accuracy
- Excellent signal reception
- Great out of band signal rejection
- RoHS compliant



## TW2106/ TW2108 Embedded Precision GPS L1 Antenna

### Specifications Vcc = 3V, over full bandwidth, T=25°C

#### Antenna

|                                   |                        |
|-----------------------------------|------------------------|
| Architecture                      | Dual, Quadrature Feeds |
| Antenna Gain (100mm ground plane) | 4.25 dBic              |
| Axial Ratio (over full bandwidth) | ≤3 dB                  |

#### Electrical

|                        |   |
|------------------------|---|
| Architecture           | One LNA per feed line, mid section SAW filter, output LNA |
| Frequency Bandwidth    | 1575 MHz ± 10 MHz   |
| Polarization           | RHCP  |
| Gain                   | 26 dB min. at 90° (at 1575.42 MHz)                        |
| Out-of-Band Rejection  | <1560 MHz >42 dB  |
|                        | >1600 MHz >31 dB  |
|                        | >1620 MHz >45 dB  |
| VSWR (at LNA input)    | <1.5:1 typ 1.8:1 max.                                     |
| Noise Figure           | 1 dB typ.   |
| Supply Voltage Range   | +2.5 to 16 VDC nominal (12VDC recommended maximum)        |
| Supply Current         | 15 mA typ at 25°C.  |
| ESD Circuit Protection | 15 KV air discharge                                       |

#### Mechanicals & Environmental

|                       |   |
|-----------------------|---|
| Mechanical Size       | 56 mm dia. x 7.8 mm H                           |
| Cable                 | RG174   |
| Operating Temp. Range | -40 to +85 °C                                   |
| Weight                | 100 g   |
| Attachment Method     | Adhesive or screw mount                         |
| Environmental         | RoHS compliant                                  |
| Shock                 | Vertical axis: 50 G, other axes: 30 G           |
| Vibration             | 3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G |
| Warranty              | One year – parts and labour                     |

#### Ordering Information

|                                      |                    |
|--------------------------------------|--------------------|
| TW2106 – GPS L1 antenna              | 33-2106-xx-yyyy-zz |
| TW2108 – GPS L1 antenna w/pre-filter | 33-2108-xx-yyyy-zz |

Where xx = connector type and yyyy = cable length in mm

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available connectors.

### Tallysman Wireless Inc

36 Steacie Drive  
Ottawa ON K2K 2A9 Canada  
Tel +1 613 591 3131 Fax 613 591 3121  
[sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved. Rev 1.2