


EZO-DO™

Embedded Dissolved Oxygen Circuit

ISO 5814 Compliant


(determination of dissolved oxygen)

Reads	Dissolved Oxygen
Range	0.00 – 100 mg/L 0 – 350% saturation
Accuracy	+/- 0.05 mg/L
D.O. reading time	600ms
Supported probes	Any galvanic probe
Calibration	1 or 2 point
Temperature, salinity and pressure compensation	Yes
Data protocol	UART & I²C
Default I ² C address	97 (0x61)
Operating voltage	3.3V – 5V
Data format	ASCII

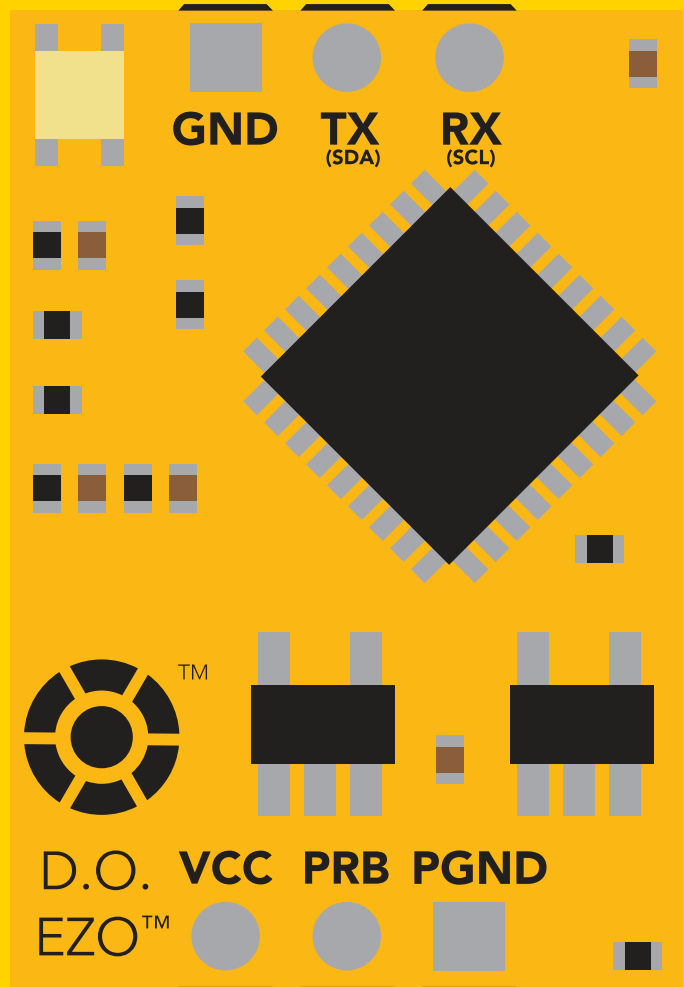

PATENT PROTECTED

The EZO™ D.O. Circuit has all the features of this bench top meter.

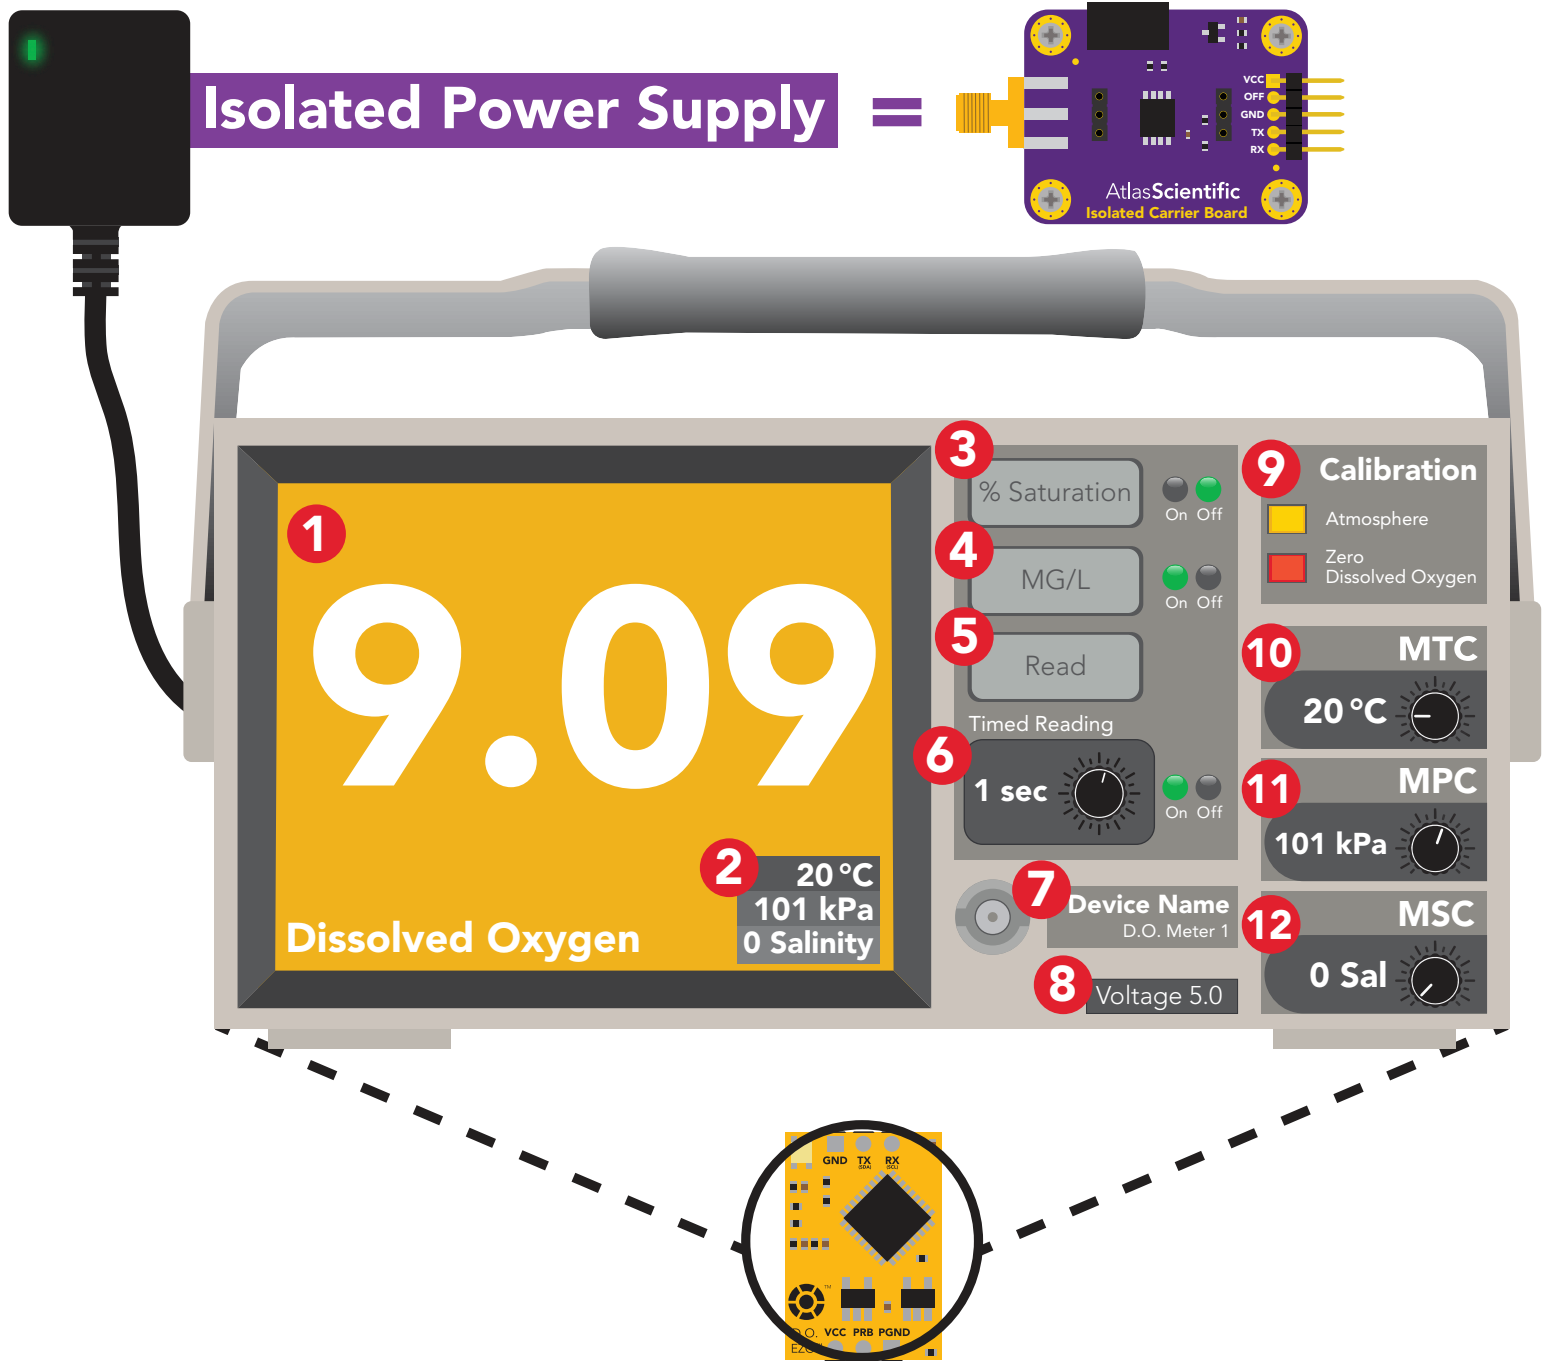

- 1 Two decimal D.O. reading
- 2 Temperature, pressure, and salinity compensation value
- 3 Percent saturation
- 4 Milligrams per liter
- 5 Immediate reading
- 6 Timed readings
- 7 Set device name
- 8 Voltage usage
- 9 Multi point calibration
- 10 Manual temperature compensation
- 11 Manual pressure compensation
- 12 Manual salinity compensation

The EZO™ D.O. Circuit is compatible with any brand of galvanic D.O. probe.

✓ Available data protocols

UART

Default

I²C

X Unavailable data protocols

SPI

Analog

RS-485

Mod Bus

4–20mA

STOP




SOLDERING THIS DEVICE VOIDS YOUR WARRANTY.

Are there specific soldering instructions? Yes, see page 71.

Can you make a warranty claim after soldering? No.

If you have not used this product before; Observe how a properly working sensor behaves *BEFORE* embedding it into your PCB.

Get this device working using one of these methods first.

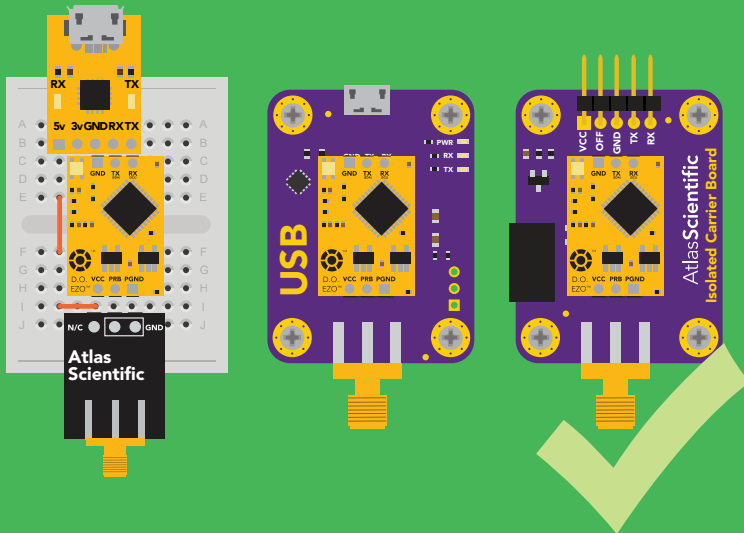

Do not embed before you have experience with this sensor.

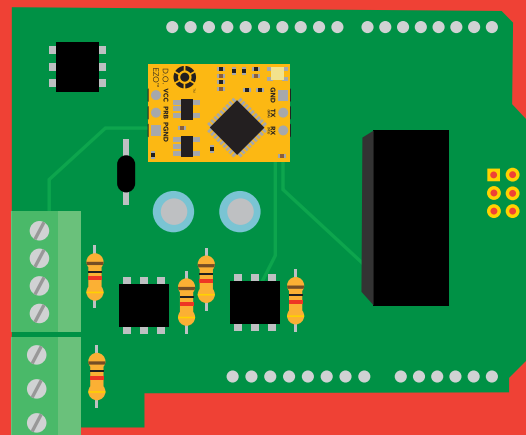


Table of contents

Available data protocols	3	Correct wiring	9
Circuit dimensions	6	Default state	10
Power consumption	6	Circuit footprint	73
Absolute max ratings	6	Datasheet change log	74
Electrical isolation	7	Warranty	79
Calibration theory	63		
Understanding D.O. measurements	68		
Hyper saturation with pure oxygen	70		


UART

UART mode	11
LED color definition	12
Receiving data from device	13
Sending commands to device	14
UART quick command page	15
LED control	16
Find	17
Continuous reading mode	18
Single reading mode	19
Calibration	20
Export calibration	21
Import calibration	22
Temperature compensation	23
Salinity compensation	24
Atmospheric pressure compensation	25
Enable/disable parameters	26
Naming device	27
Device information	28
Response codes	29
Reading device status	30
Sleep mode/low power	31
Change baud rate	32
Protocol lock	33
Factory reset	34
Change to I ² C mode	35
Manual switching to I ² C	36

I²C

I ² C mode	38
Sending commands	39
Requesting data	40
Response codes	41
LED color definition	42
I²C quick command page	43
LED control	44
Find	45
Taking reading	46
Calibration	47
Export calibration	48
Import calibration	49
Temperature compensation	50
Salinity compensation	51
Atmospheric pressure compensation	52
Enable/disable parameters	53
Naming device	54
Device information	55
Reading device status	56
Sleep mode/low power	57
Protocol lock	58
I ² C address change	59
Factory reset	60
Change to UART mode	61
Manual switching to UART	62

EZO™ circuit dimensions

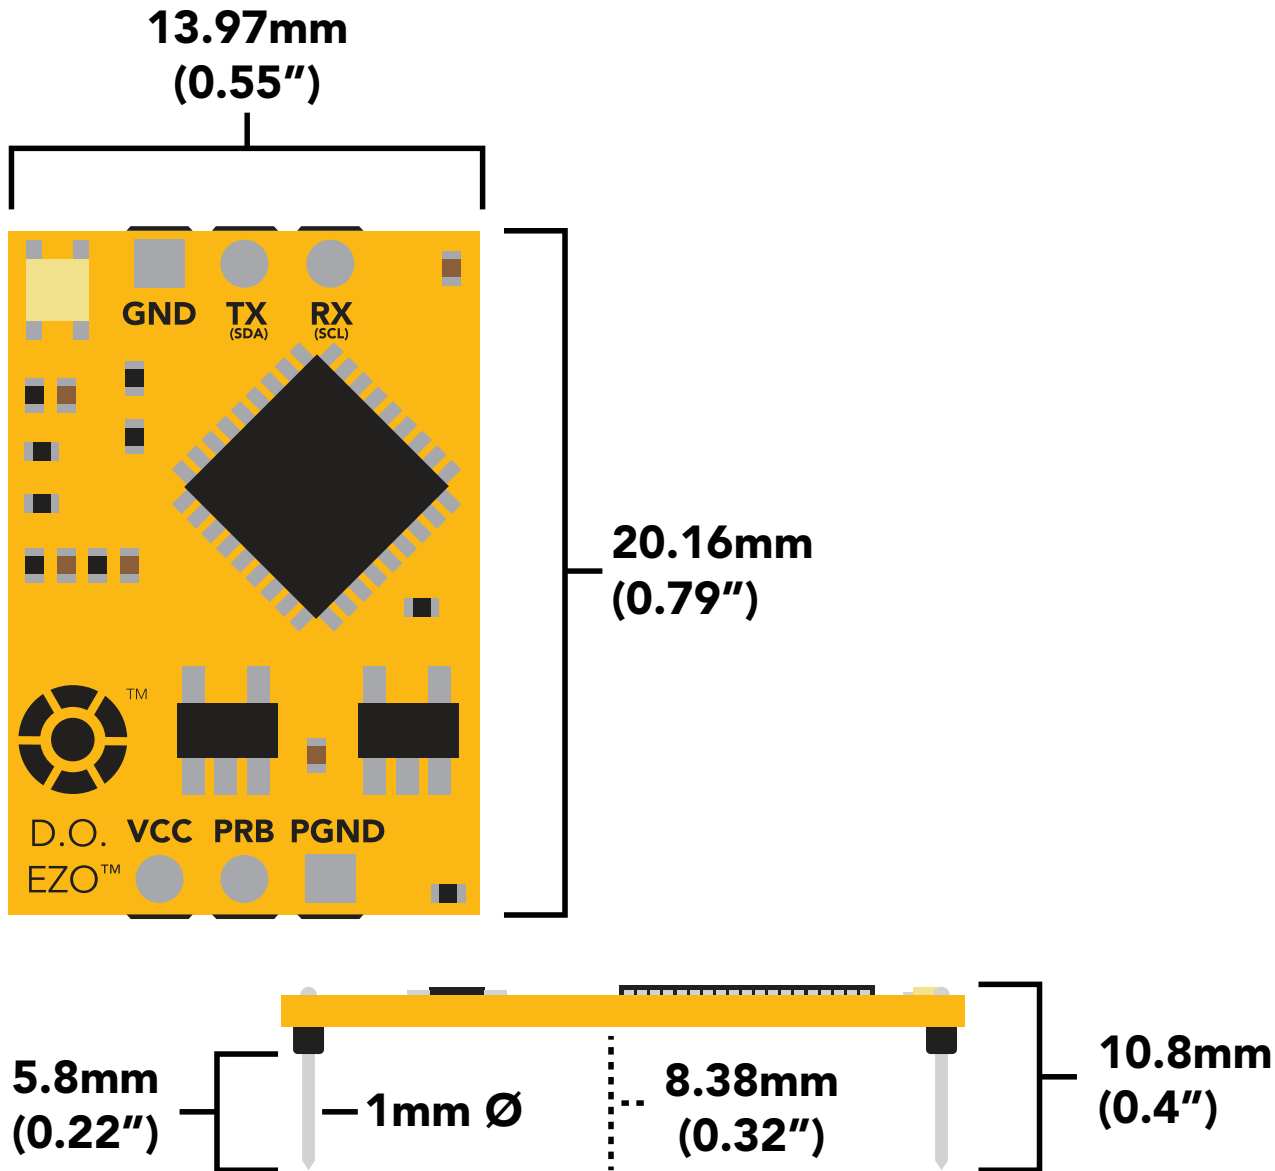

Power consumption

	LED	MAX	STANDBY	SLEEP
5V	ON	13.5 mA	13.1 mA	0.66 mA
	OFF	12.7 mA	12.7 mA	
3.3V	ON	12.1 mA	12 mA	0.3 mA
	OFF	11.9 mA	11.9 mA	

Absolute max ratings

Parameter	MIN	TYP	MAX
Storage temperature (EZO™ D.O.)	-65 °C		125 °C
Operational temperature (EZO™ D.O.)	-40 °C	25 °C	85 °C
VCC	3.3V	5V	5.5V

Electrical isolation

The Atlas Scientific EZO™ Dissolved Oxygen circuit is a very sensitive device. This sensitivity is what gives the Dissolved Oxygen circuit its accuracy. This also means that the Dissolved Oxygen circuit is capable of reading micro-voltages that are bleeding into the water from unnatural sources such as pumps, solenoid valves or other probes/sensors.

When electrical noise is interfering with the Dissolved Oxygen readings it is common to see rapidly fluctuating readings or readings that are consistently off. To verify that electrical noise is causing inaccurate readings, place the Dissolved Oxygen probe in a cup of water by itself. The readings should stabilize quickly, confirming that electrical noise was the issue.




Advice:

When reading D.O. along with other sensors, electrical isolation is strongly recommended. **Never build a commercial product without electrical isolation.**

Atlas Scientific offers several different electrical isolation products that can be used in your design. Select the electrical isolation product that works best for your design.



Basic EZO™
Inline Voltage Isolator



Vertical Isolator



Electrically Isolated
EZO™ Carrier Board




Gen 2 Electrically Isolated
USB EZO™ Carrier Board



Whitebox T1



Whitebox T3



Whitebox T3



Electrically Isolated EZO™
Carrier Board (old style)


For various reasons, you may need to build your own electrical isolator. Because electrical isolation is so important, we have published our isolation schematic for anyone to use.

This isolation schematic is based on the ADM3260, which can output up to 150 mW of isolated power. PCB layout requires special attention for EMI/EMC and RF Control. Having good ground planes and keeping the capacitors as close to the chip as possible are crucial for proper performance.

The two data channels have a 4.7kΩ pull-up resistor on both the isolated and non-isolated lines (R1, R2, R3, and R4). The output voltage is set using a voltage divider (R5, R6, and R7). This produces a voltage of 3.9V regardless of your input voltage.

Isolated ground is different from non-isolated ground, these two lines should not be connected together.


VCC = 3.0v – 5.5v

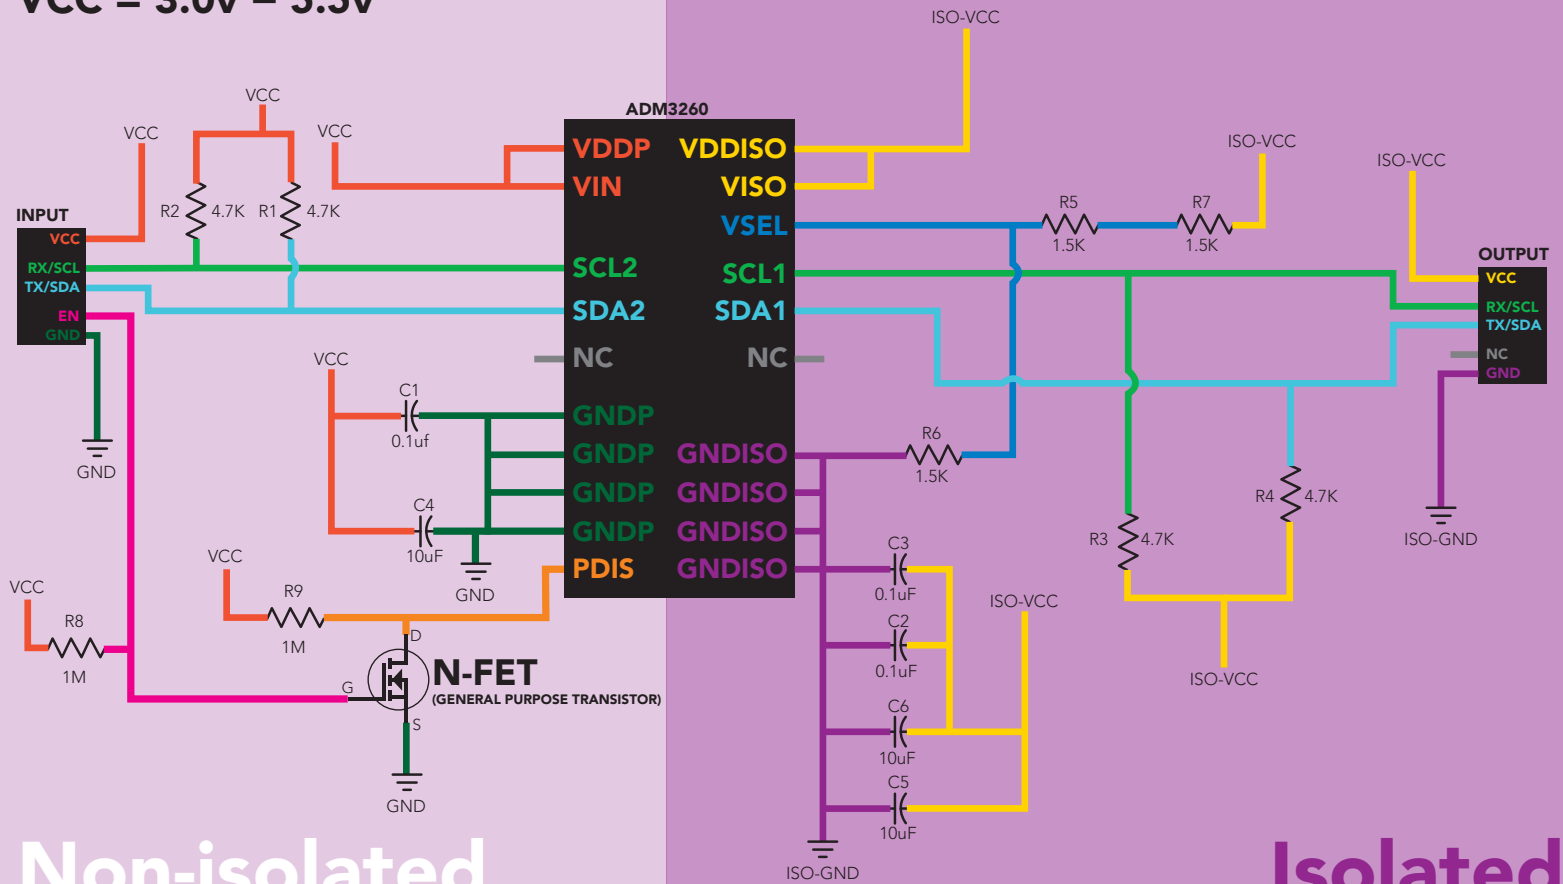

Non-isolated


Isolated

✓ Correct wiring

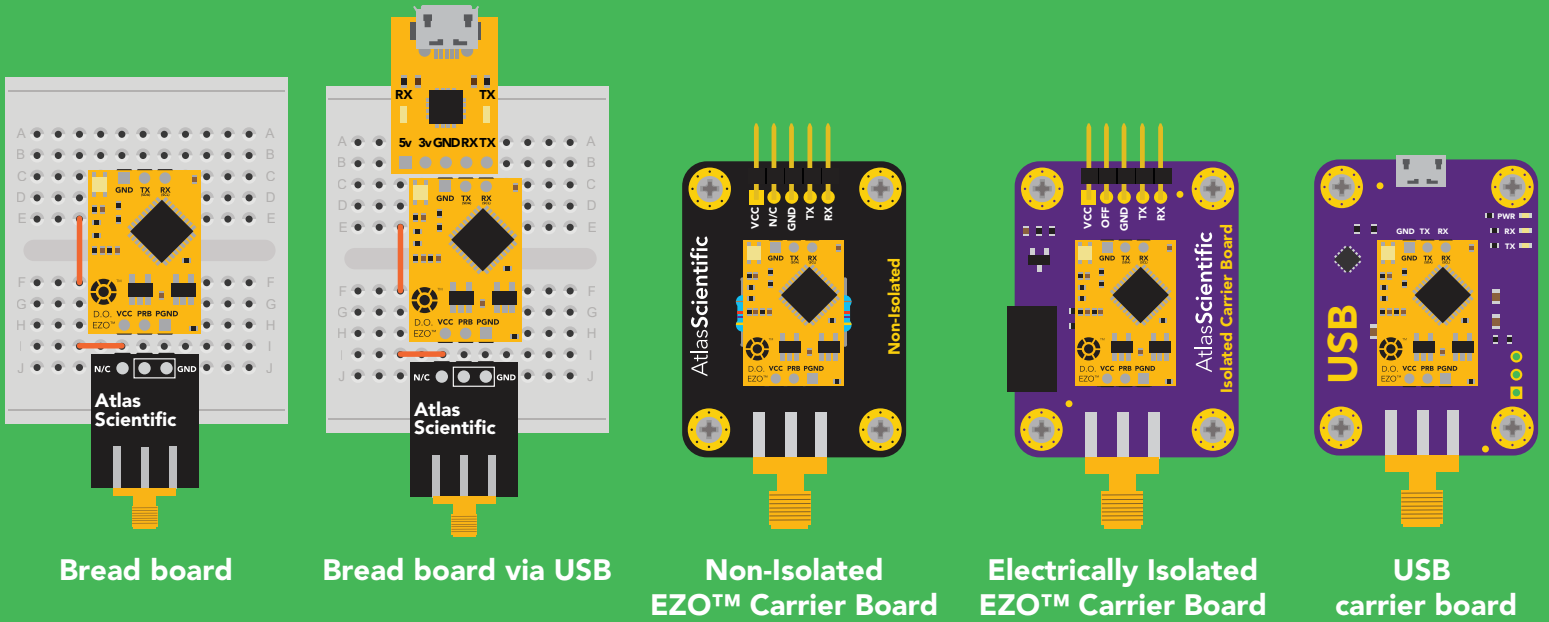

✗ Incorrect wiring

Extended leads Sloppy setup Perfboards or Protoboards *Embedded into your device

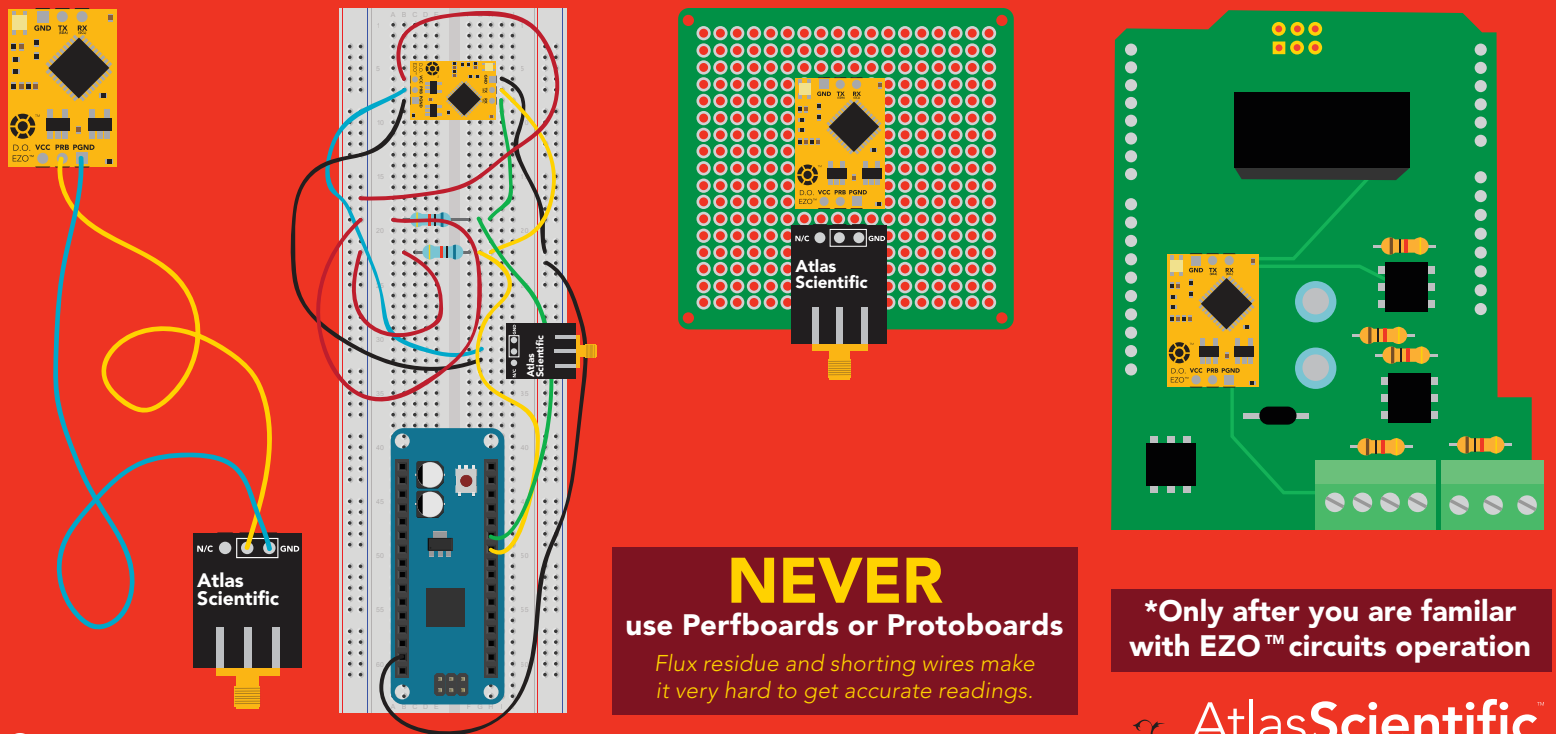

Default state

UART mode



Baud 9,600

Readings continuous

Units mg/L

Speed 1 reading per second

LED on

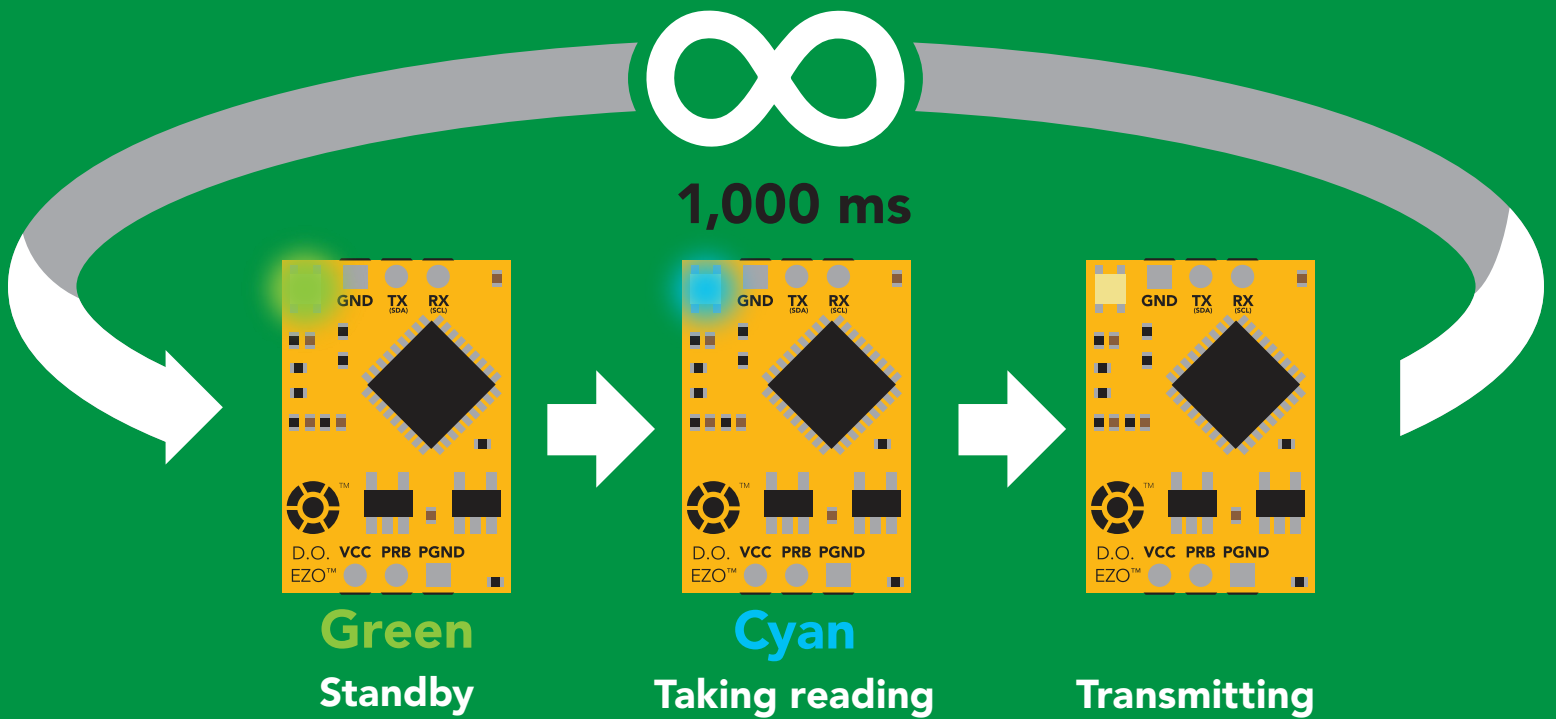

Solid Blue LED
in I²C mode
Not UART ready

UART mode

8 data bits no parity
1 stop bit no flow control

Baud 300
1,200
2,400
9,600 default
19,200
38,400
57,600
115,200


RX
Data in



TX
Data out




Vcc 3.3V – 5.5V

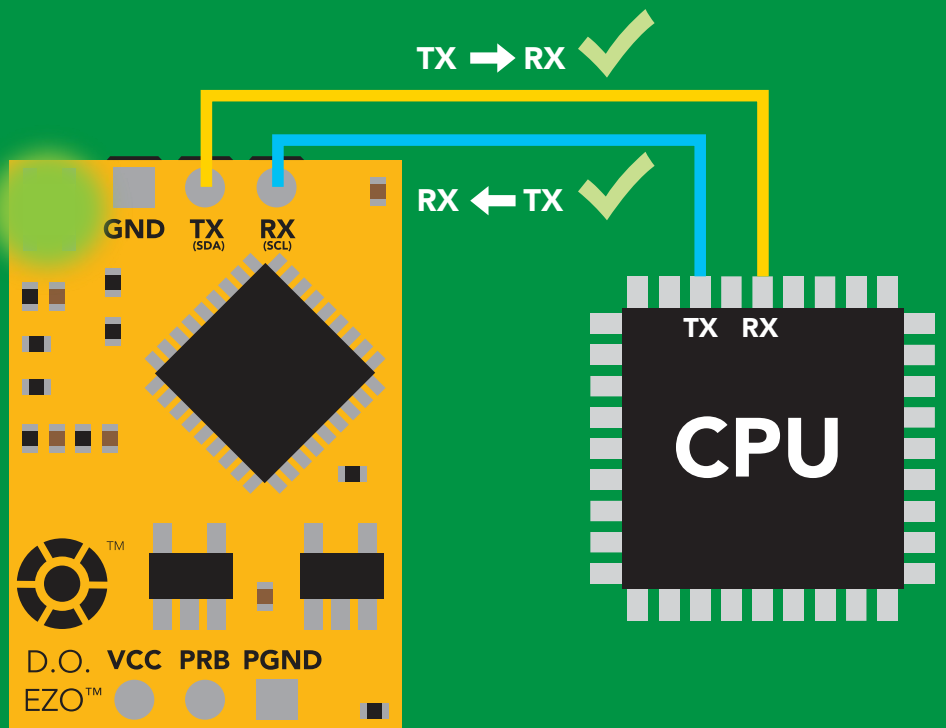Data format


Reading	D.O.	Data type	floating point
Order	mg/L & (% sat) <small>when enabled</small>	Decimal places	mg/L = 2 % sat = 1
Encoding	ASCII	Smallest string	4 characters
Format	string <small>(CSV string when % sat is enabled)</small>	Largest string	40 characters
Terminator	carriage return		

LED color definition




Green

UART standby




Cyan

Taking reading




Purple

Changing
baud rate




Red

Command
not understood



White

Find



Blue

I2C standby

5V

LED ON
+0.4 mA

3.3V

+0.2 mA

Settings that are retained if power is cut

- Baud rate
- Calibration
- Continuous mode
- Device name
- Enable/disable parameters
- Enable/disable response codes
- Hardware switch to I²C mode
- LED control
- Protocol lock
- Software switch to I²C mode

Settings that are **NOT** retained if power is cut

- Find
- Pressure compensation
- Salinity compensation
- Sleep mode
- Temperature compensation

Receiving data from device


2 parts

ASCII data string

Command

Carriage return <cr>

Terminator

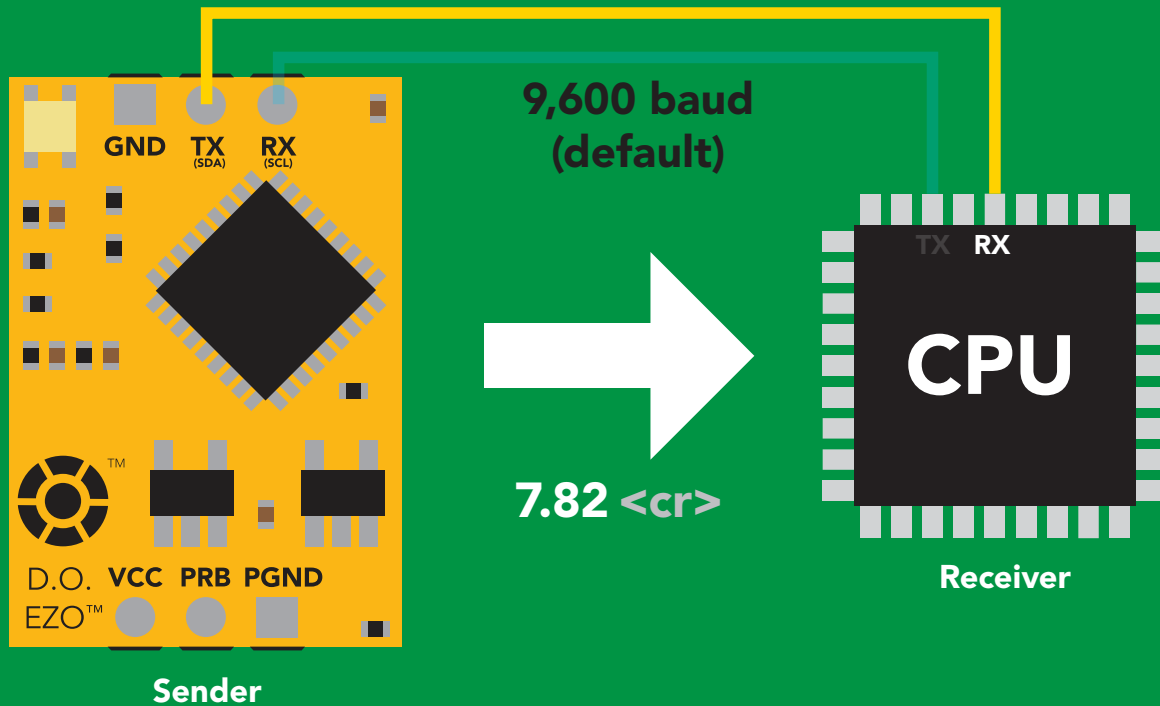

Advanced

ASCII:	7	.	8	2	<cr>
Hex:	37	2E	38	32	0D
Dec:	55	46	56	50	13

Sending commands to device


2 parts

Command (not case sensitive)

ASCII data string

Carriage return <cr>

Terminator

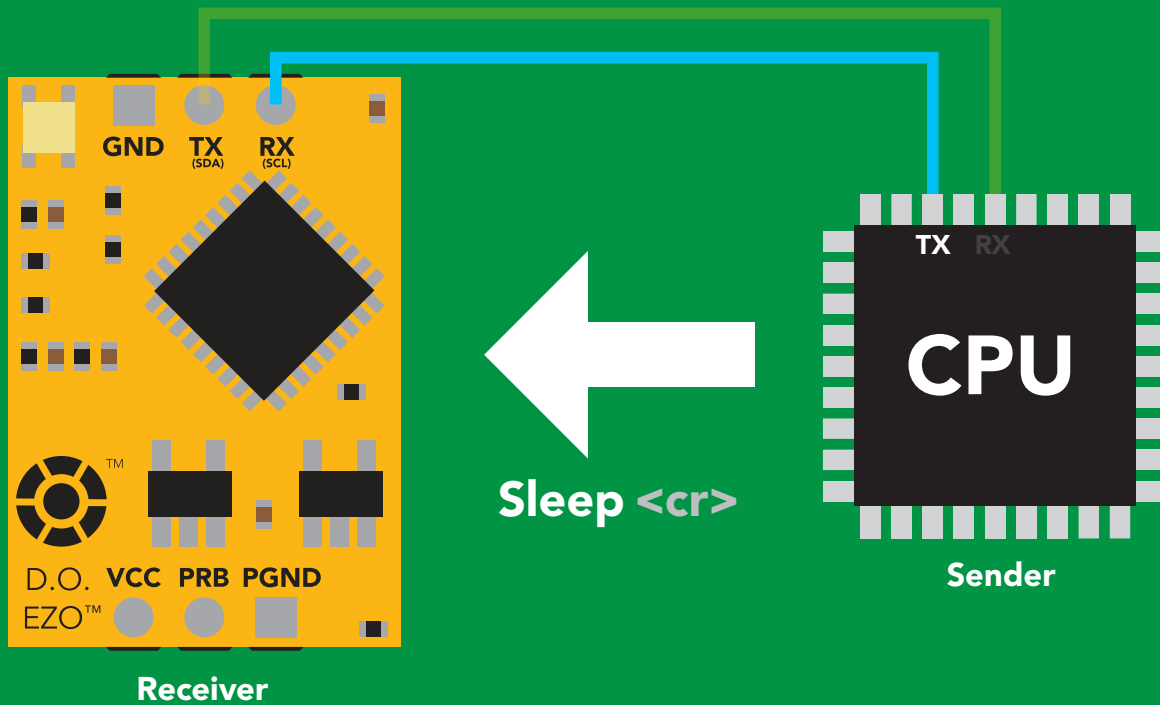

Advanced

ASCII: **S** **I** **e** **e** **p** **<cr>**

Hex: **53** **6C** **65** **65** **70** **0D**

Dec: **83** **108** **101** **101** **112** **13**

UART mode

command quick reference

All commands are ASCII strings or single ASCII characters.

Command	Function		Default state
Baud	change baud rate	pg. 32	9,600
C	enable/disable continuous reading	pg. 18	enabled
Cal	performs calibration	pg. 20	n/a
Export	export calibration	pg. 21	n/a
Factory	enable factory reset	pg. 34	n/a
Find	finds device with blinking white LED	pg. 17	n/a
i	device information	pg. 28	n/a
I2C	change to I ² C mode	pg. 35	not set
Import	import calibration	pg. 22	n/a
L	enable/disable LED	pg. 16	enabled
Name	set/show name of device	pg. 27	not set
O	enable/disable parameters	pg. 26	mg/L
P	atmospheric pressure compensation	pg. 25	101.3 kPa
Plock	enable/disable protocol lock	pg. 33	disabled
R	returns a single reading	pg. 19	n/a
S	salinity compensation	pg. 24	n/a
Sleep	enter sleep mode/low power	pg. 31	n/a
Status	retrieve status information	pg. 30	n/a
T	temperature compensation	pg. 23	20°C
*OK	enable/disable response codes	pg. 29	enable

LED control

Command syntax

L,1 <cr> LED on **default**

L,0 <cr> LED off

L,? <cr> LED state on/off?

Example

Response

L,1 <cr>


*OK <cr>

L,0 <cr>


*OK <cr>

L,? <cr>

?L,1 <cr> or ?L,0 <cr>
*OK <cr>

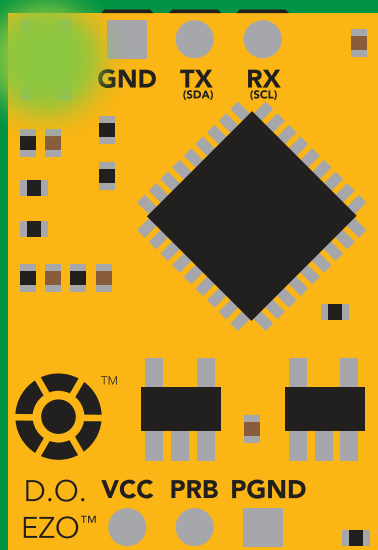

L,1

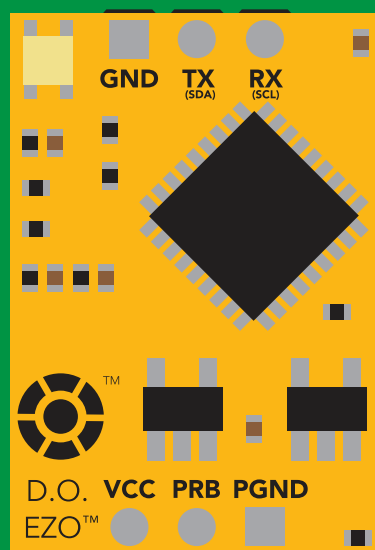

L,0

Find

Command syntax

This command will disable continuous mode
Send any character or command to terminate find.


Find <cr> LED rapidly blinks white, used to help find device

Example

Response

Find <cr>

*OK <cr>

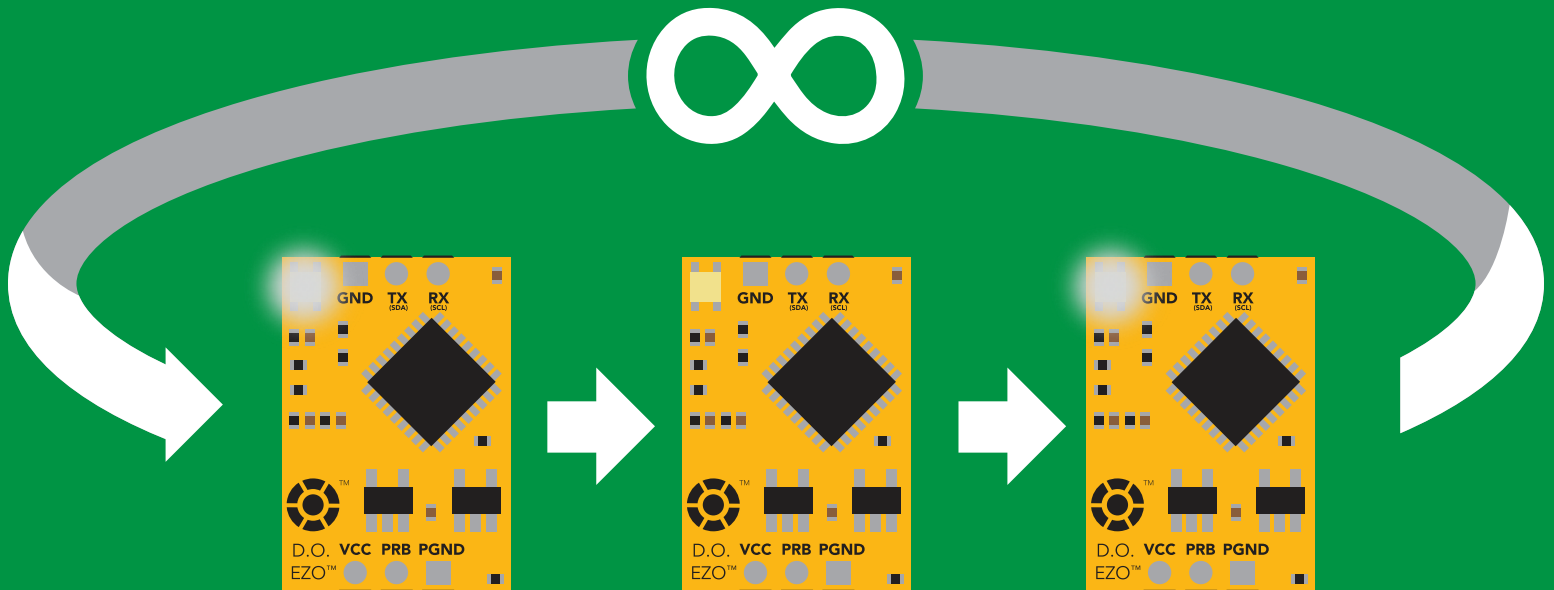

Continuous reading mode

Command syntax

- C,1 <cr>** enable continuous readings once per second **default**
- C,n <cr>** continuous readings every n seconds (n = 2 to 99 sec)
- C,0 <cr>** disable continuous readings
- C,? <cr>** continuous reading mode on/off?

Example

Response

C,1 <cr>

***OK <cr>**
DO (1 sec) <cr>
DO (2 sec) <cr>
DO (3 sec) <cr>

C,30 <cr>

***OK <cr>**
DO (30 sec) <cr>
DO (60 sec) <cr>
DO (90 sec) <cr>

C,0 <cr>

***OK <cr>**

C,? <cr>

?C,1 <cr> or ?C,0 <cr> or ?C,30 <cr>
***OK <cr>**

Single reading mode

Command syntax

R <cr> takes single reading


Example

R <cr>


Response

7.82 <cr>


*OK <cr>

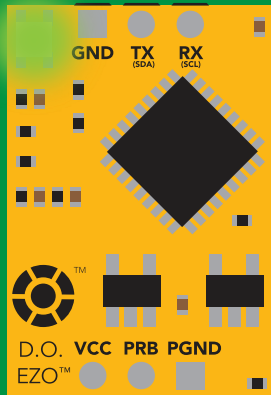

Green
Standby

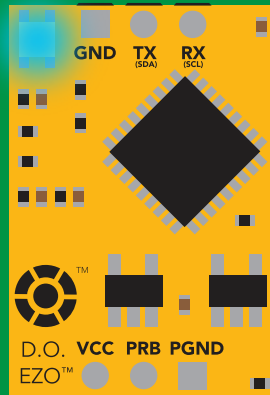

Cyan
Taking reading

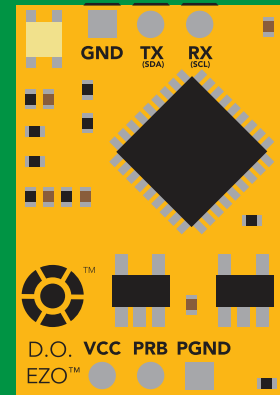

Yellow
Transmitting



600 ms

Calibration

Command syntax

The EZO™ Dissolved Oxygen circuit uses single and/or two point calibration

- Cal <cr> calibrate to atmospheric oxygen levels
- Cal,0 <cr> calibrate device to 0 dissolved oxygen
- Cal,clear <cr> delete calibration data
- Cal,? <cr> device calibrated?

Example

Response

Cal <cr>

*OK <cr>

Cal,0 <cr>


*OK <cr>

Cal,clear <cr>

*OK <cr>

Cal,? <cr>

?Cal,0 <cr> or ?Cal,1 <cr> or ?Cal,2 <cr>
*OK <cr> single point two point

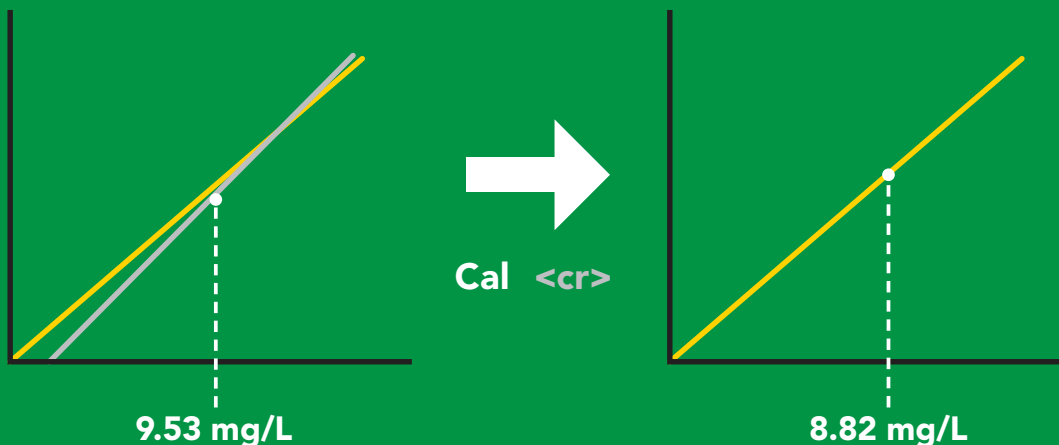

Export calibration

Command syntax

Export: Use this command to download calibration settings

Export,? <cr> calibration string info

Export <cr> export calibration string from calibrated device

Example

Response

Export,? <cr>

10,120 <cr>

Response breakdown

10, 120

of strings to export

of bytes to export

Export strings can be up to 12 characters long, and is always followed by <cr>

Export <cr>

59 6F 75 20 61 72 <cr> (1 of 10)

Export <cr>

65 20 61 20 63 6F <cr> (2 of 10)

(7 more)

⋮

Export <cr>


6F 6C 20 67 75 79 <cr> (10 of 10)

Export <cr>

***DONE**

Disabling *OK simplifies this process

Export <cr>

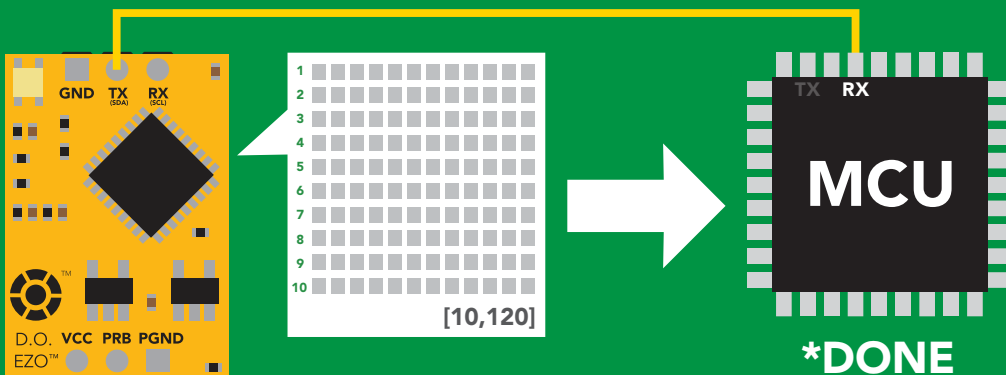

Import calibration

Command syntax

Import: Use this command to upload calibration settings to one or more devices.

Import,n <cr> import calibration string to new device

Example

Import, 59 6F 75 20 61 72 <cr> (1 of 10)

Import, 65 20 61 20 63 6F <cr> (2 of 10)

⋮

Import, 6F 6C 20 67 75 79 <cr> (10 of 10)

Response


*OK <cr>

*OK <cr>


⋮

*OK <cr>

Import,n <cr>

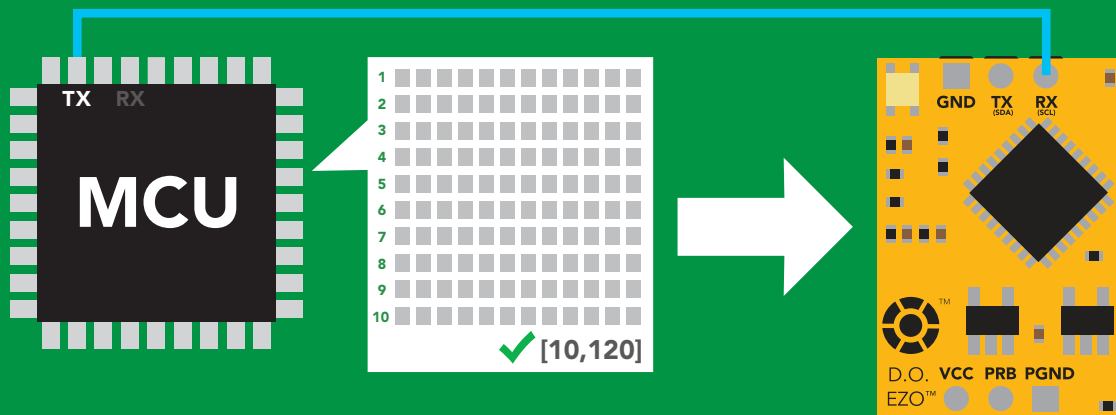

*OK <cr>
system will reboot

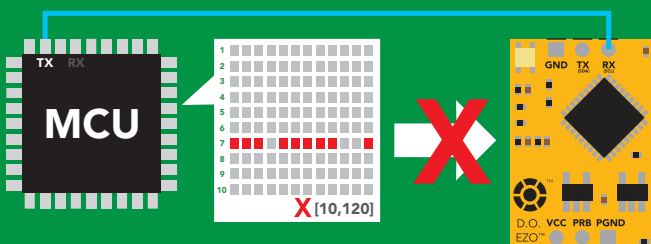

*ER <cr>

* If one of the imported strings is not correctly entered, the device will not accept the import, respond with *ER and reboot.

Temperature compensation

Command syntax

Default temperature = 20°C
Temperature is always in Celsius
Temperature is not retained if power is cut

T,n <cr> n = any value; floating point or int

T,? <cr> compensated temperature value?

RT,n <cr> set temperature compensation and take a reading*

This is a new command for firmware V2.13

Example

Response

T,19.5 <cr>


***OK** <cr>

RT,19.5 <cr>


***OK** <cr>
8.91 <cr>

T,? <cr>

?T,19.5 <cr>
***OK** <cr>

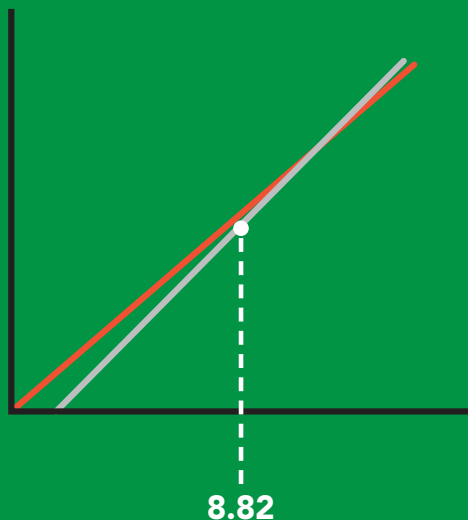

→
T,19.5 <cr>

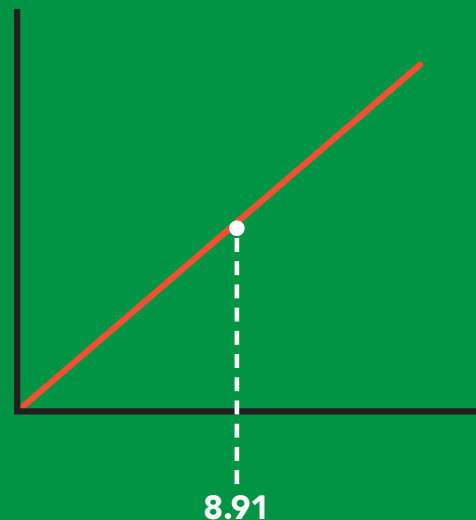

Salinity compensation

Command syntax

Default value = 0 μS
If the conductivity of your water is less than 2,500 μS this command is irrelevant

S,n <cr> n = any value in microsiemens
S,n,ppt <cr> n = any value in ppt
S,? <cr> compensated salinity value?

Example

Response

S,50000 <cr>


***OK** <cr>

S,37.5,ppt <cr>


***OK** <cr>

S,? <cr>

?S,50000, μS <cr> **or** **?S,37.5,ppt** <cr>
***OK** <cr>

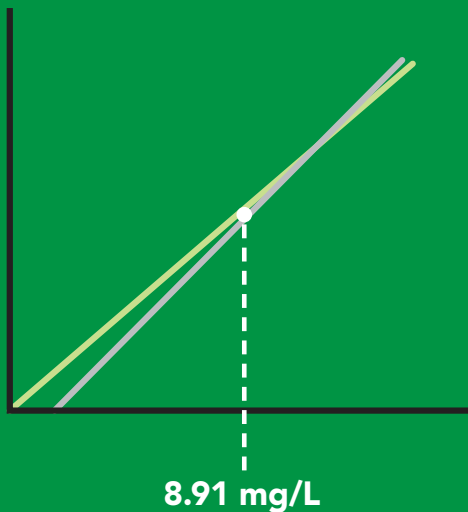

S,50000 <cr>

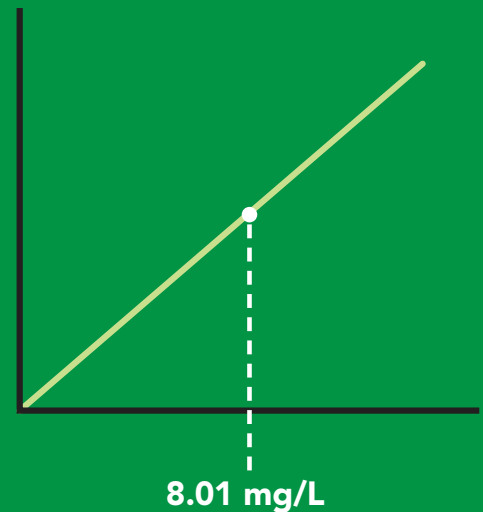

Atmospheric pressure compensation

Command syntax

P,n <cr> n = any value in kPa

P,? <cr> compensated pressure value?

Example


Response

P,90.25 <cr>


*OK <cr>

P,? <cr>

?,P,90.25 <cr>
*OK <cr>

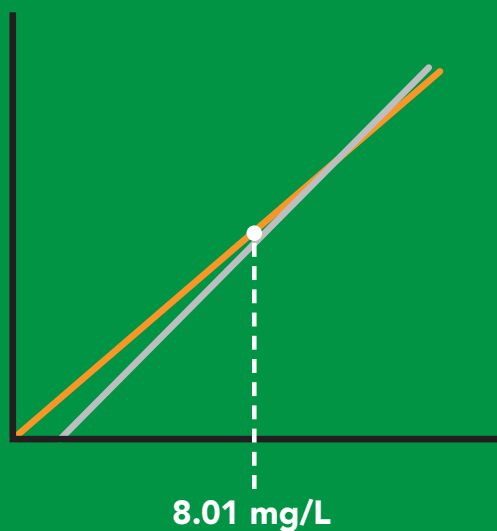

→
P,90.25 <cr>

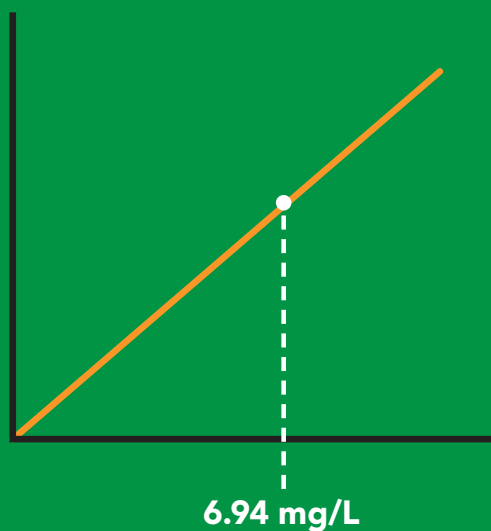

Enable/disable parameters from output string

Command syntax

O, [parameter],[1,0] <cr> enable or disable output parameter

O,? <cr> enabled parameter?

Example

O,mg,1 / O,mg,0 <cr>

O,%,1 / O,%,0 <cr>

O,? <cr>

Response

*OK <cr> enable / disable mg/L

*OK <cr> enable / disable percent saturation

?,O,%,mg <cr> if both are enabled

Parameters

mg mg/L
% percent saturation

Followed by 1 or 0

1 enabled
0 disabled

*** If you disable all possible data types your readings will display "no output".**

Naming device

Command syntax

Do not use spaces in the name

Name,n <cr> set name

Name, <cr> clears name

Name,? <cr> show name

n =

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

Up to 16 ASCII characters

Example

Response

Name, <cr>

*OK <cr> name has been cleared


Name,zzt <cr>

*OK <cr>

Name,? <cr>


?Name,zzt <cr>
*OK <cr>

Name,zzt

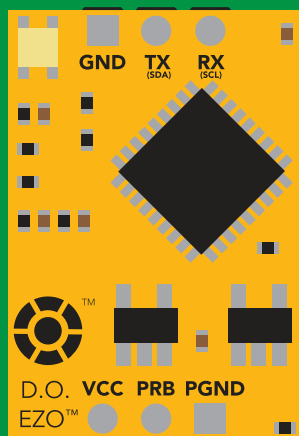

*OK <cr>

Name,?

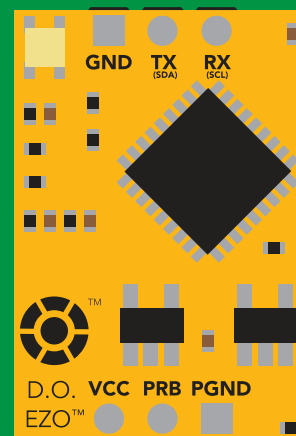

?Name,zzt <cr>
*OK <cr>

Device information

Command syntax

```
i <cr> device information
```

Example

```
i <cr>
```

Response

```
?i,D.O.,1.98 <cr>  
*OK <cr>
```

Response breakdown

```
?i, D.O., 1.98  
    ↑      ↑  
  Device Firmware
```

Response codes

Command syntax

- *OK,1** <cr> enable response **default**
- *OK,0** <cr> disable response
- *OK,?** <cr> response on/off?

Example

Response

R <cr>

7.82 <cr>
***OK** <cr>

***OK,0** <cr>

no response, ***OK** disabled

R <cr>

7.82 <cr> ***OK** disabled

***OK,?** <cr>

?*OK,1 <cr> or **?*OK,0** <cr>

Other response codes

- *ER** unknown command
- *OV** over volt ($VCC \geq 5.5V$)
- *UV** under volt ($VCC \leq 3.1V$)
- *RS** reset
- *RE** boot up complete, ready
- *SL** entering sleep mode
- *WA** wake up

**These response codes
cannot be disabled**

Reading device status

Command syntax

Status <cr> voltage at Vcc pin and reason for last restart

Example

```
Status <cr>
```

Response

```
?Status,P,5.038 <cr>  
*OK <cr>
```

Response breakdown

?Status,	P,	5.038
	↑	↑
Reason for restart		Voltage at Vcc

Restart codes

P	powered off
S	software reset
B	brown out
W	watchdog
U	unknown

Sleep mode/low power

Command syntax

Send any character or command to awaken device.

Sleep <cr> enter sleep mode/low power

Example

Response

Sleep <cr>

*OK <cr>

*SL <cr>

Any command

*WA <cr> wakes up device

5V

STANDBY

13.1 mA


SLEEP

0.66 mA


3.3V

12 mA


0.3 mA

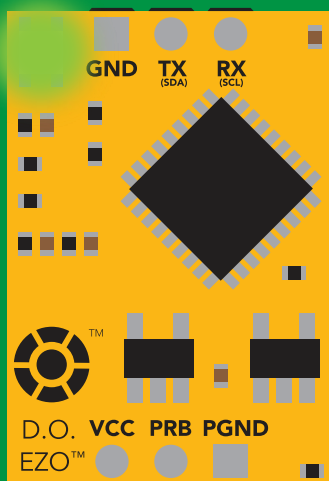

Standby
13.1 mA



Sleep <cr>

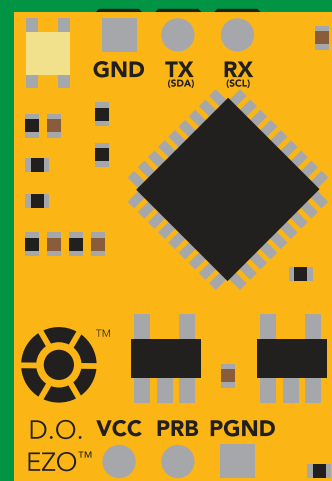

Sleep
0.66 mA

Change baud rate

Command syntax

Baud,n <cr> change baud rate

Example

Baud,38400 <cr>

*OK <cr>


Baud,? <cr>

?Baud,38400 <cr>

*OK <cr>


n =

- 300
- 1200
- 2400
- 9600 default**
- 19200
- 38400
- 57600
- 115200

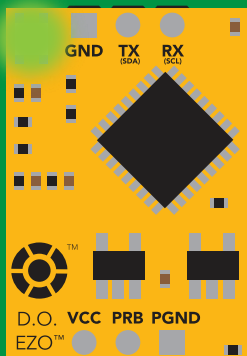


Standby

Baud,38400 <cr>

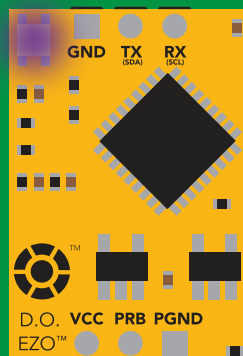


Changing
baud rate

*OK <cr>



(reboot)

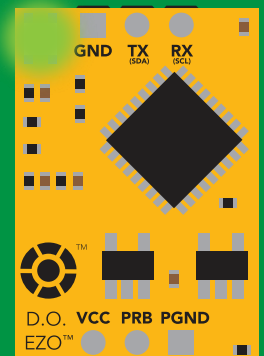

Standby

Protocol lock

Command syntax

Locks device to UART mode.

Plock,1 <cr> enable Plock

Plock,0 <cr> disable Plock **default**

Plock,? <cr> Plock on/off?

Example

Response

Plock,1 <cr>

*OK <cr>


Plock,0 <cr>

*OK <cr>

Plock,? <cr>


?Plock,1 <cr> or ?Plock,0 <cr>

Plock,1

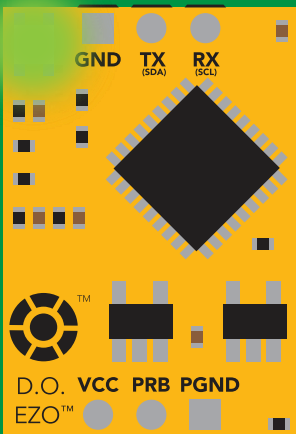

*OK <cr>


I2C,100

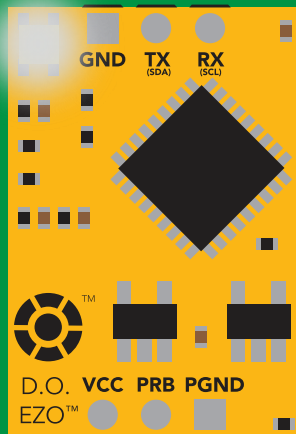

cannot change to I²C

*ER <cr>

Short

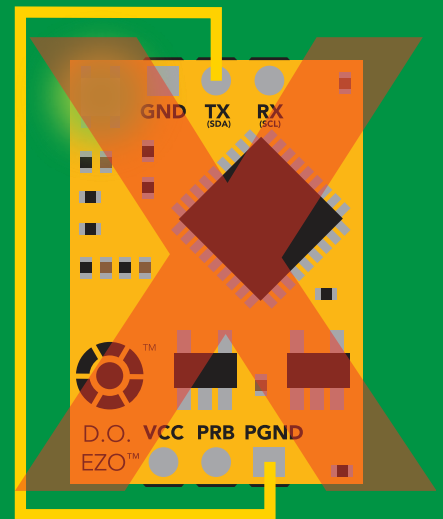

cannot change to I²C

Factory reset

Command syntax

Clears calibration
LED on
"*OK" enabled

Factory <cr> enable factory reset



Example

Response


Factory <cr>

*OK <cr>

Factory <cr>

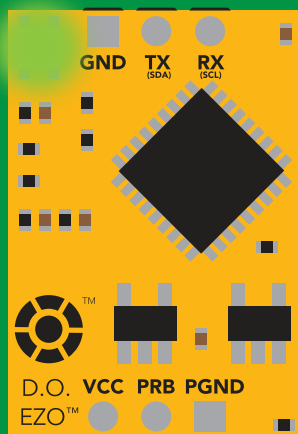

(reboot)

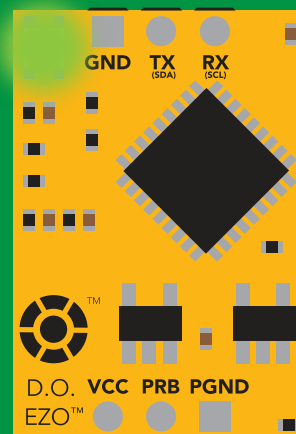

*OK <cr>

*RS <cr>

*RE <cr>

Baud rate will not change

Change to I²C mode

Command syntax

Default I²C address 97 (0x61)

I2C,n <cr> sets I²C address and reboots into I²C mode

n = any number 1 – 127

Example

Response

I2C,100 <cr>

*OK (reboot in I²C mode)


Wrong example

Response


I2C,139 <cr> n ≠ 127

*ER <cr>


I2C,100

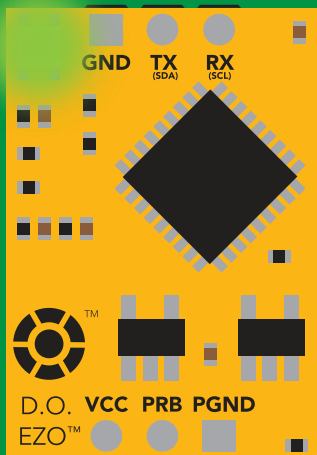

Green
*OK <cr>



(reboot)

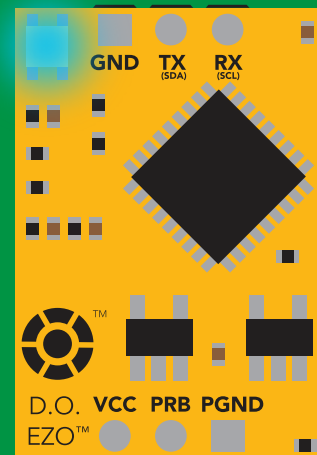


Blue
now in I²C mode

Manual switching to I²C


- Disconnect ground (power off)
- Disconnect TX and RX
- Connect TX to PGND
- Confirm RX is disconnected
- Connect ground (power on)
- Wait for LED to change from **Green** to **Blue**
- Disconnect ground (power off)
- Reconnect all data and power

Manually switching to I²C will set the I²C address to 97 (0x61)

Example

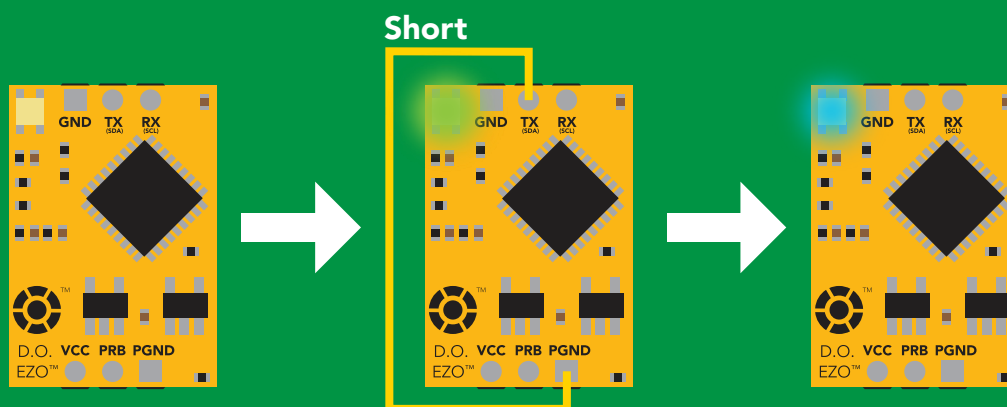

Wrong Example

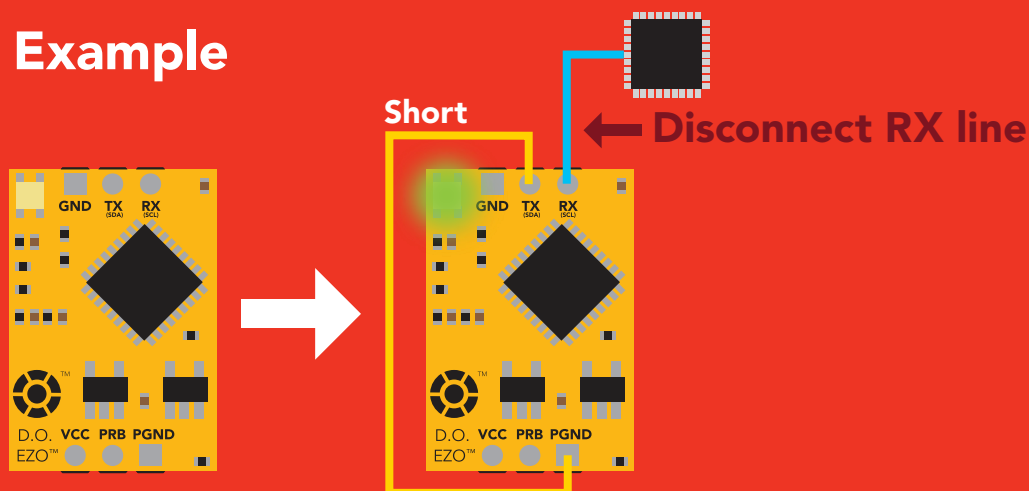

I²C mode

The I²C protocol is **considerably more complex** than the UART (RS-232) protocol. Atlas Scientific assumes the embedded systems engineer understands this protocol.

To set your EZO™ device into I²C mode click [here](#)

Settings that are retained if power is cut

- Calibration
- Change I²C address
- Enable/disable parameters
- Hardware switch to UART mode
- LED control
- Protocol lock
- Software switch to UART mode

Settings that are **NOT** retained if power is cut

- Find
- Pressure compensation
- Salinity compensation
- Sleep mode
- Temperature compensation

I²C mode

I²C address (0x01 – 0x7F)
97 (0x61) default


V_{cc} 3.3V – 5.5V

Clock speed 100 – 400 kHz

SDA 

SCL 



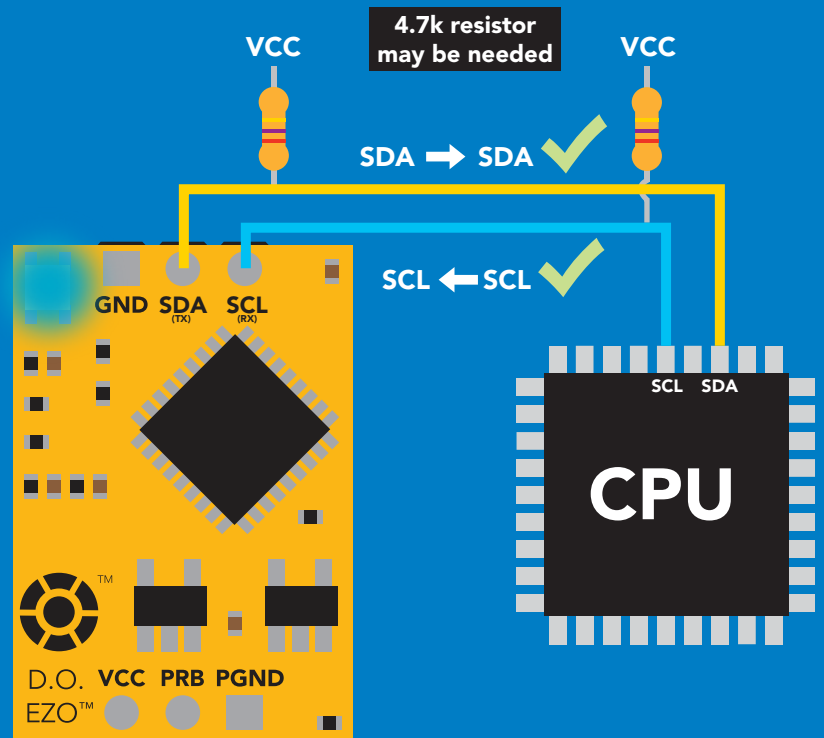

Data format


Reading	Dissolved Oxygen	Data type	floating point
Order	mg/L & (% sat) <small>when enabled</small>	Decimal places	mg/L = 2 % sat = 1
Encoding	ASCII	Smallest string	4 characters
Format	string <small>(CSV string when % sat is enabled)</small>	Largest string	16 characters

Sending commands to device


5 parts





Example

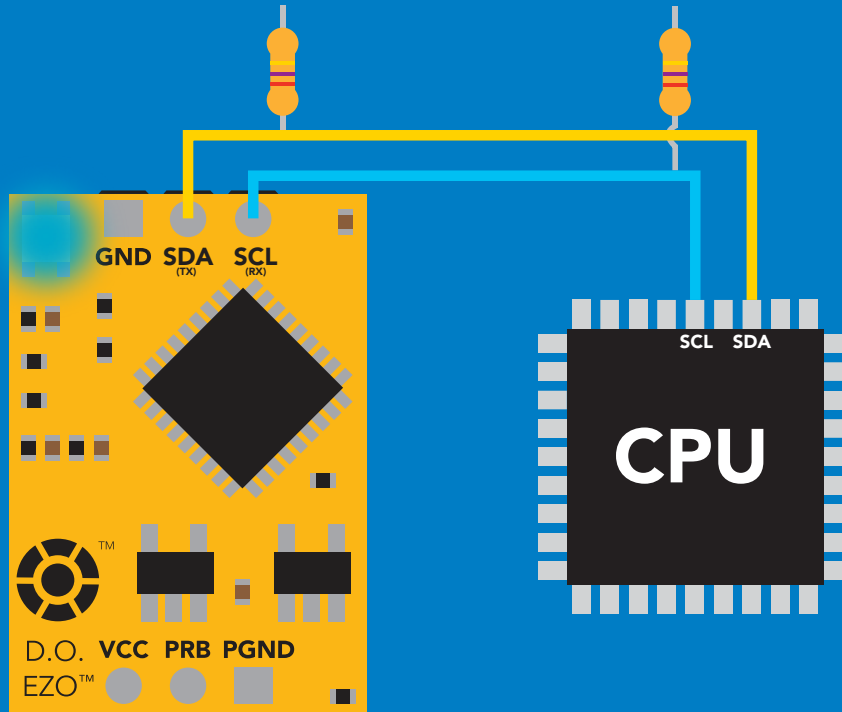


Advanced

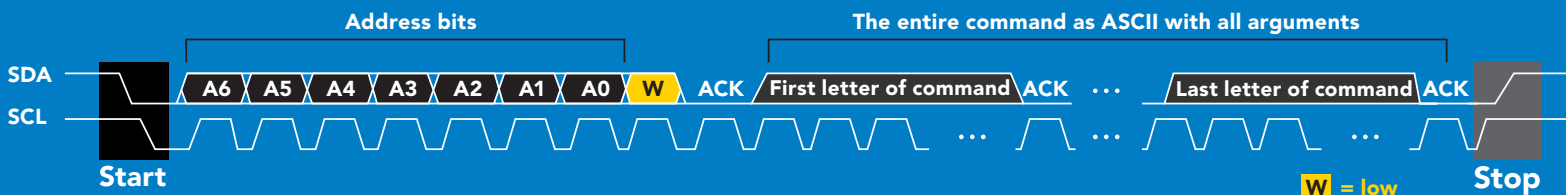

Requesting data from device

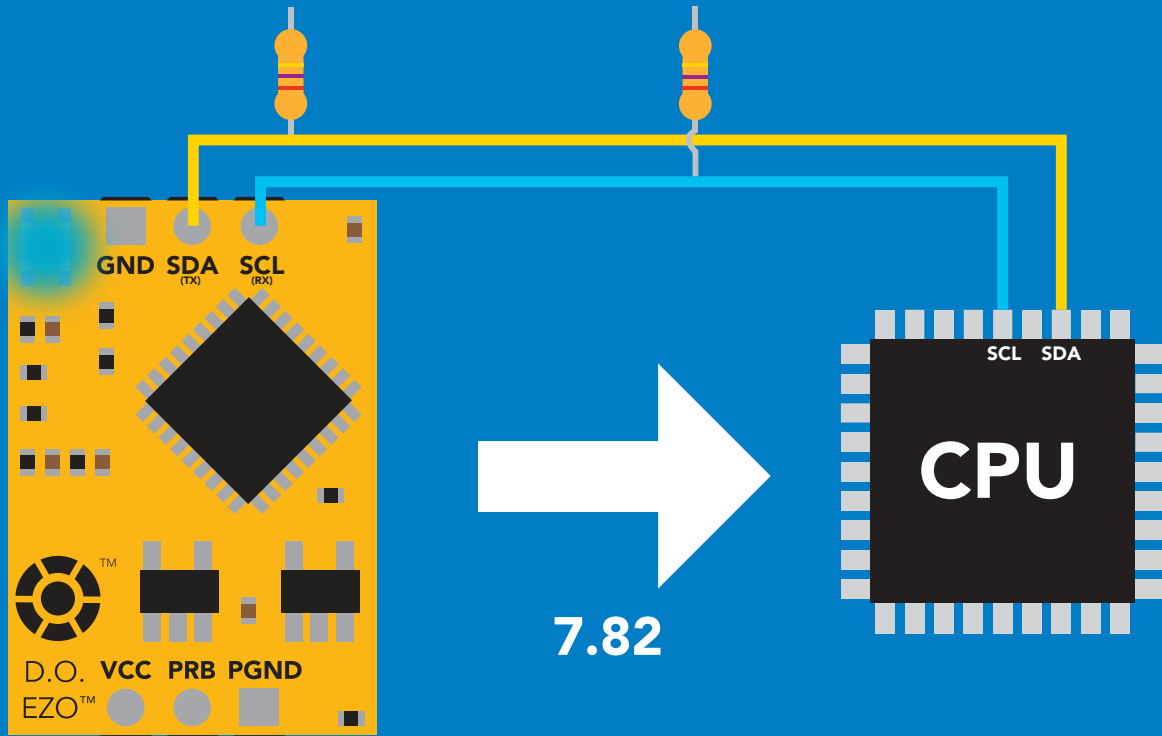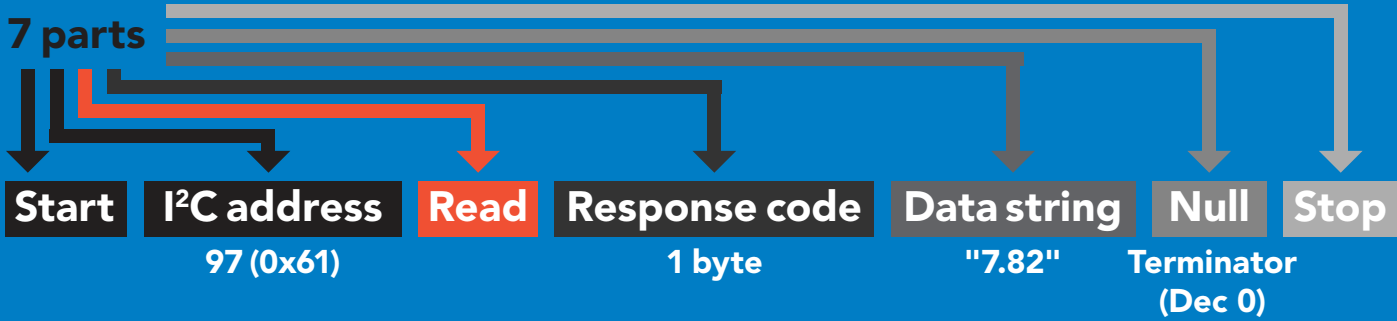


Advanced

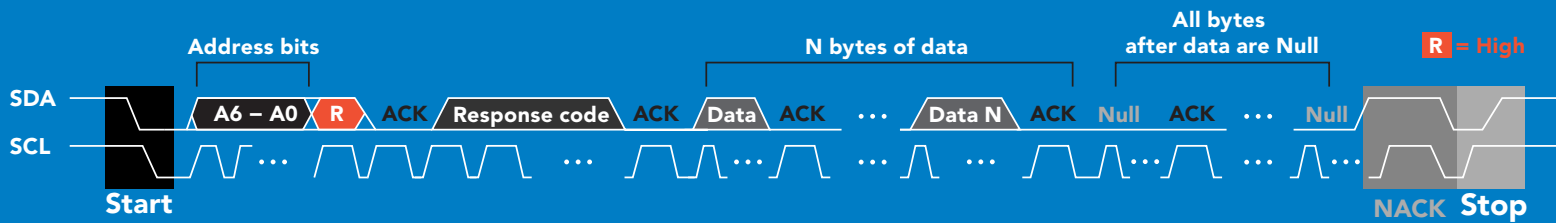

Response codes

After a command has been issued, a 1 byte response code can be read in order to confirm that the command was processed successfully.

Reading back the response code is completely optional, and is not required for normal operation.

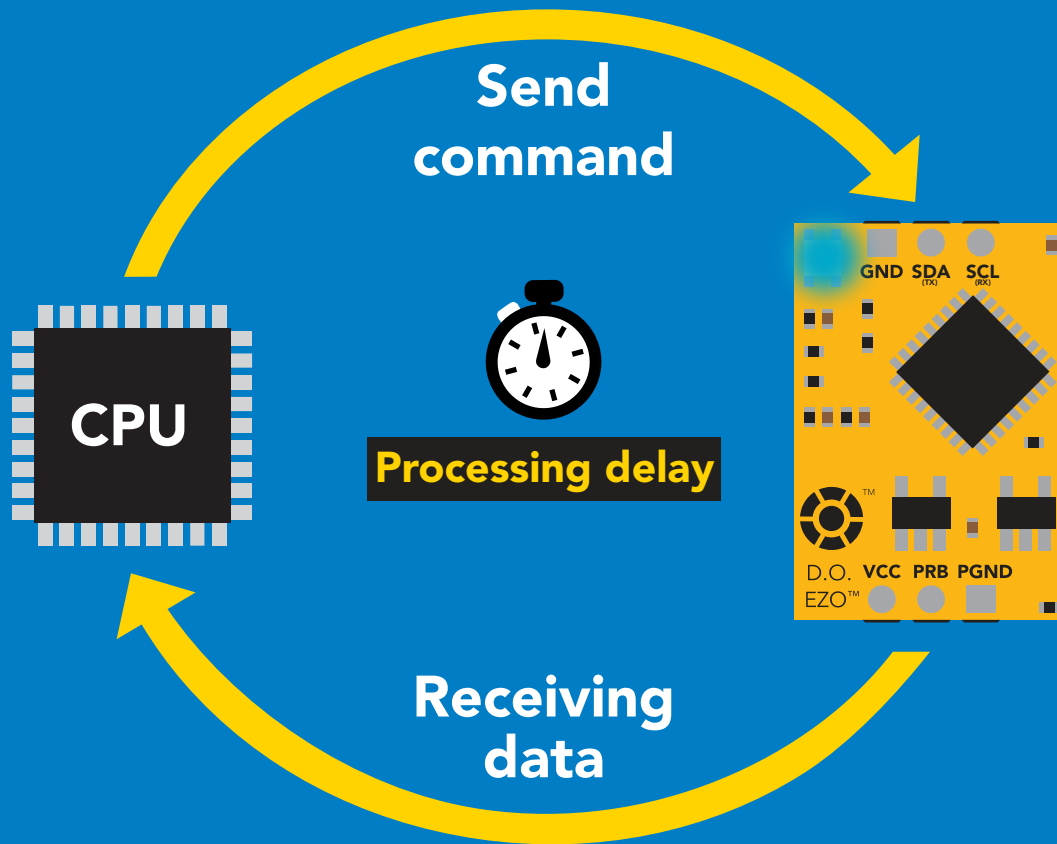

Example

```
I2C_start;  
I2C_address;  
I2C_write(EZO_command);  
I2C_stop;
```

```
delay(300);
```



```
Processing delay
```

```
I2C_start;  
I2C_address;  
Char[ ] = I2C_read;  
I2C_stop;
```


The response code will always be 254, if you do not wait for the processing delay.

Response codes

Single byte, not string


255	no data to send
254	still processing, not ready
2	syntax error
1	successful request

LED color definition




Blue

I²C standby




Green

Taking reading




Purple

Changing
I²C address



Red

Command
not understood



White


Find

5V

LED ON
+0.4 mA

3.3V

+0.2 mA

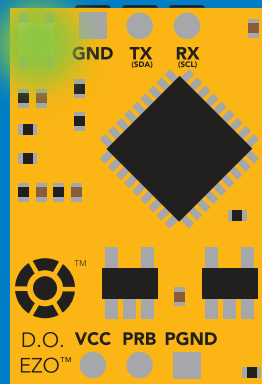

Solid Green LED

in UART mode
Not I²C ready

I²C mode

command quick reference

All commands are ASCII strings or single ASCII characters.

Command	Function	
Baud	change back to UART mode	pg. 61
Cal	performs calibration	pg. 47
Export	export calibration	pg. 48
Factory	enable factory reset	pg. 60
Find	finds device with blinking white LED	pg. 45
i	device information	pg. 55
I2C	change I ² C address	pg. 59
Import	import calibration	pg. 49
L	enable/disable LED	pg. 44
Name	set/show name of device	pg. 54
O	removing parameters	pg. 53
P	atmospheric pressure compensation	pg. 52
Plock	enable/disable protocol lock	pg. 58
R	returns a single reading	pg. 46
S	salinity compensation	pg. 51
Sleep	enter sleep mode/low power	pg. 57
Status	retrieve status information	pg. 56
T	temperature compensation	pg. 50

LED control

Command syntax

300ms  processing delay

L,1 LED on **default**

L,0 LED off

L,? LED state on/off?

Example

Response

L,1


Wait 300ms

1	0
Dec	Null

L,0


Wait 300ms

1	0
Dec	Null


L,?


Wait 300ms


1	?L,1	0
Dec	ASCII	Null

or

1	?L,0	0
Dec	ASCII	Null

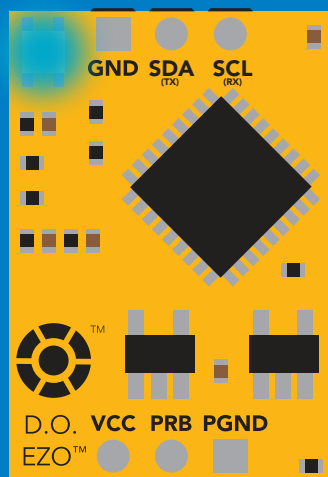

L,1

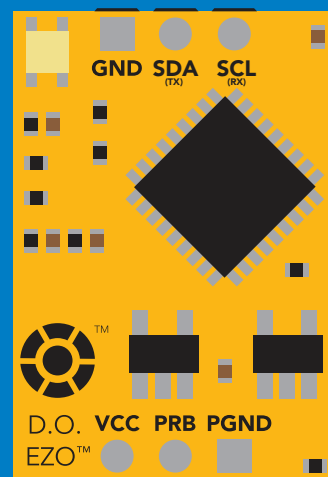

L,0

Find

300ms  processing delay

Command syntax

This command will disable continuous mode
Send any character or command to terminate find.


Find LED rapidly blinks white, used to help find device

Example

Response

Find

 Wait 300ms **1** Dec **0** Null

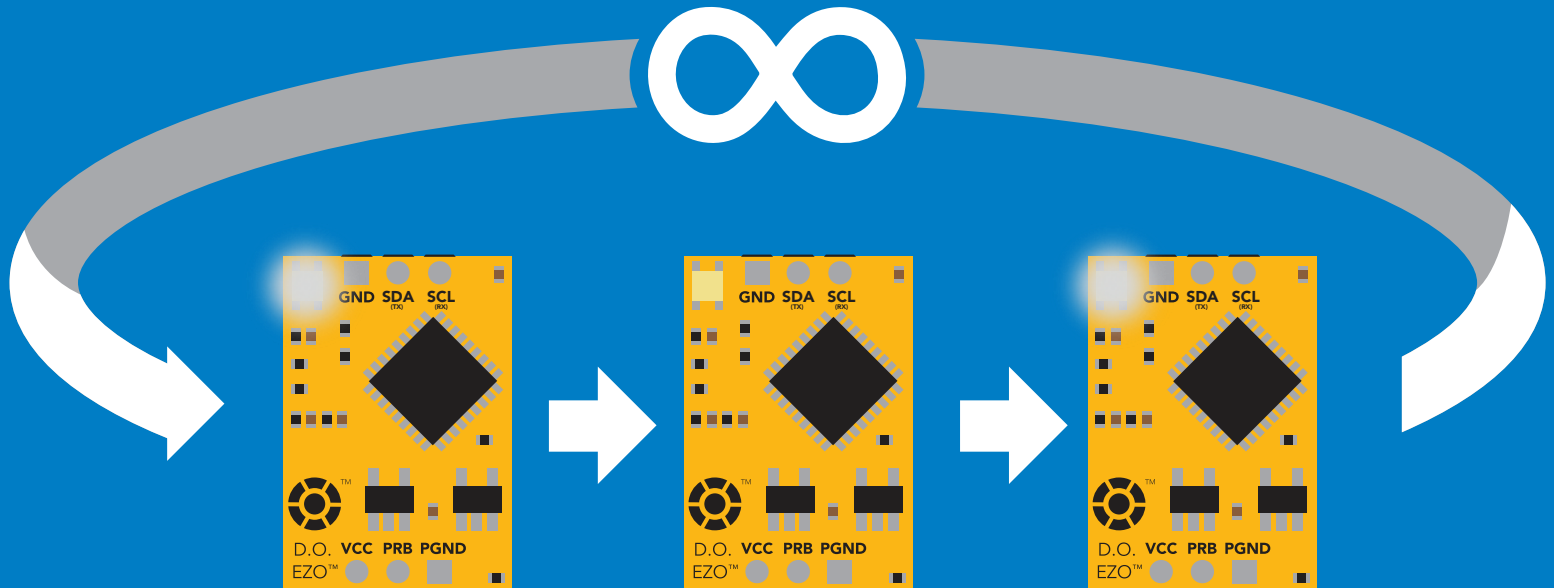

Taking reading

Command syntax

600ms  processing delay


R return 1 reading

Example

Response



R

 Wait 600ms **1** Dec **7.82** ASCII **0** Null


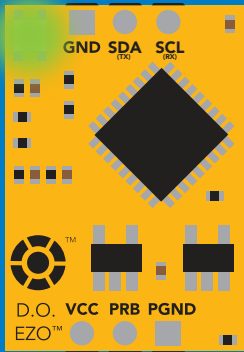


Green

Taking reading

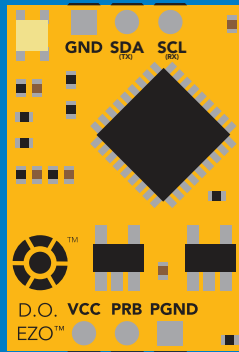

Transmitting

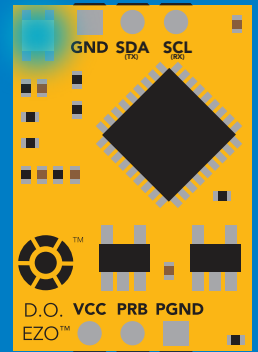

Blue

Standby

Calibration

Command syntax

1300ms  processing delay

- Cal calibrate to atmospheric oxygen levels
- Cal,0 calibrate device to 0 dissolved oxygen
- Cal,clear delete calibration data
- Cal,? device calibrated?

The EZO™ Dissolved Oxygen circuit uses single and/or two point calibration

Example

Response

Cal


Wait 1300ms 1 0
Dec Null


Cal,0


Wait 1300ms 1 0
Dec Null

Cal,clear


Wait 300ms 1 0
Dec Null

Cal,?


Wait 300ms 1 ?Cal,0 0 or 1 ?Cal,1 0
Dec ASCII Null Dec ASCII Null

or 1 ?Cal,2 0
Dec ASCII Null

Export calibration

300ms  processing delay

Command syntax

Export: Use this command to download calibration settings

Export,? calibration string info

Export export calibration string from calibrated device

Example

Response

Export,?



Wait 300ms

1

Dec

10,120

ASCII

0

Null

Response breakdown

10, 120

of strings to export # of bytes to export

Export strings can be up to 12 characters long

Export



Wait 300ms

1

Dec

59 6F 75 20 61 72

ASCII

0

Null

(1 of 10)

Export



Wait 300ms

1

Dec

65 20 61 20 63 6F

ASCII

0

Null

(2 of 10)

(7 more)

⋮

Export



Wait 300ms

1

Dec

6F 6C 20 67 75 79

ASCII

0

Null

(10 of 10)

Export



Wait 300ms

1

Dec

*DONE

ASCII

0

Null

Import calibration

300ms  processing delay

Command syntax

Import: Use this command to upload calibration settings to one or more devices.

Import,n import calibration string to new device

Example

Import, 59 6F 75 20 61 72 (1 of 10)

Import, 65 20 61 20 63 6F (2 of 10)

⋮

Import, 6F 6C 20 67 75 79 (10 of 10)

Response


 **1** **0**
Wait 300ms Dec Null

 **1** **0**
Wait 300ms Dec Null

⋮


 **1** **0**
Wait 300ms Dec Null

Import,n

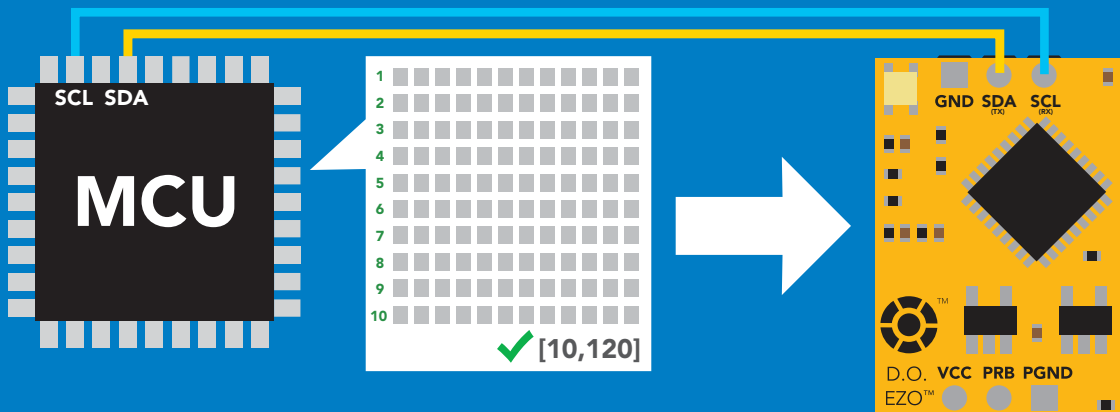

1 ***Pending** **0**
Dec ASCII Null

system will reboot

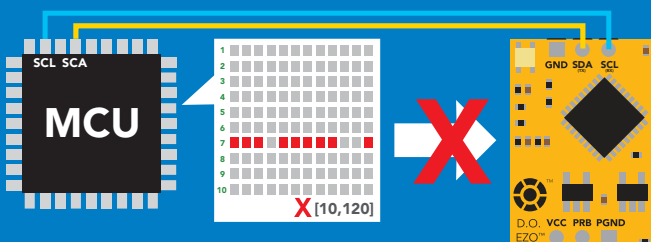

reboot

* If one of the imported strings is not correctly entered, the device will not accept the import and reboot.

Temperature compensation

Command syntax

Default temperature = 20°C
Temperature is always in Celsius
Temperature is not retained if power is cut

T,n n = any value; floating point or int 300ms  processing delay
T,? compensated temperature value?
RT,n set temperature compensation and take a reading*

This is a new command for firmware V2.13

Example

Response

T,19.5


 Wait 300ms 1 0
Dec Null

RT,19.5


 Wait 900ms 1 8.91 0
Dec ASCII Null

T,?

 Wait 300ms 1 ?T,19.5 0
Dec ASCII Null

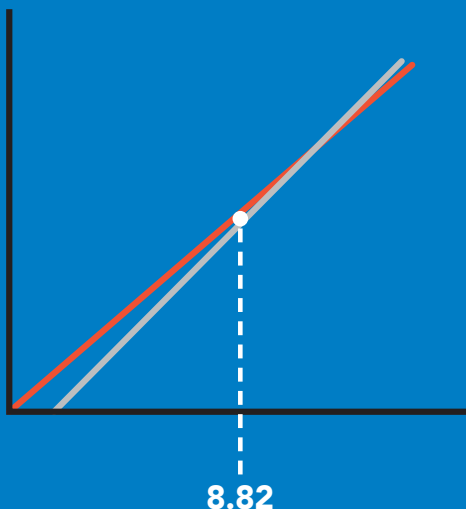

→
T,19.5

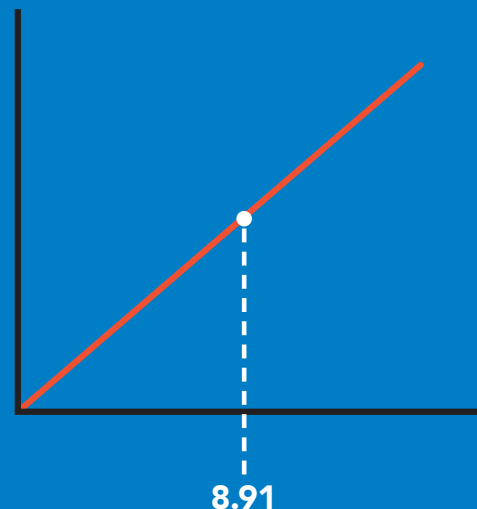

Salinity compensation

Command syntax

300ms  processing delay

- S,n n = any value in microsiemens **default**
- S,n,ppt n = any value in ppt
- S,? compensated salinity value?

Example

Response


S,50000

 **Wait 300ms** **1** **0**
Dec Null

S,37.5,ppt

 **Wait 300ms** **1** **0**
Dec Null

S,?

 **Wait 300ms** **1** **?S,50000,µS** **0**
Dec ASCII Null

or

1 **?S,37.5,ppt** **0**
Dec ASCII Null

If the conductivity of your water is less than 2,500µS this command is irrelevant

Atmospheric pressure compensation

Command syntax

300ms  processing delay

P,n n = any value in kPa

P,? compensated pressure value?

Example

P,90.25




1 0
Dec Null


P,?



1 ?,P,90.25 0
Dec ASCII Null

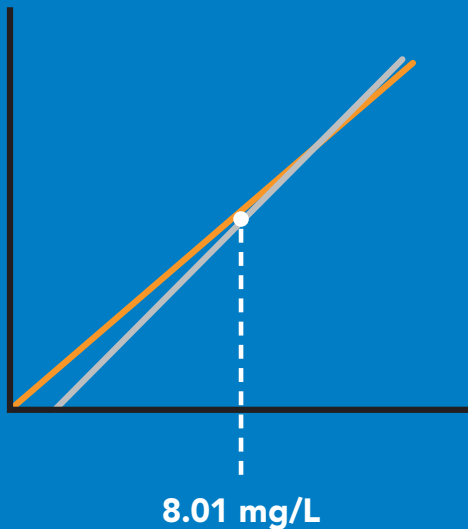

P,90.25

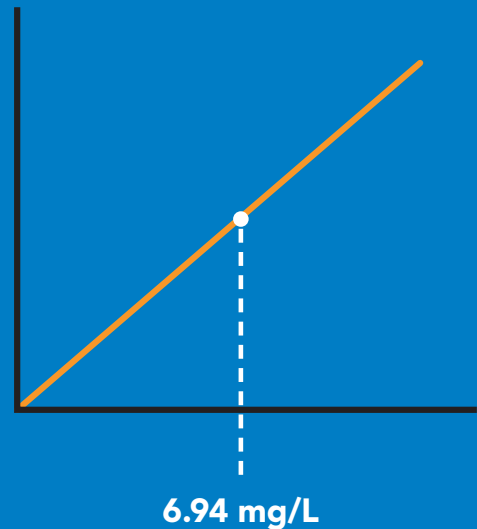

Enable/disable parameters from output string

Command syntax

300ms  processing delay

O, [parameter],[1,0]

enable or disable output parameter

O,?

enabled parameter?

Example

Response

O,mg,1 / O,mg,0



1 **0**
Dec Null

enable / disable mg/L

O,%,1 / O,%,0



1 **0**
Dec Null

enable / disable percent saturation

O,?



1 **? , O , % , mg** **0**
Dec ASCII Null

if both are enabled

Parameters

mg mg/L
% percent saturation

Followed by 1 or 0

1 enabled
0 disabled

* If you disable all possible data types your readings will display "no output".

Naming device

300ms  processing delay

Command syntax

Do not use spaces in the name

Name,n	set name	n =	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Name,	clears name		Up to 16 ASCII characters															
Name,?	show name																	

Example

Response

Name,



1 0
Dec Null

name has been cleared

Name,zzt




1 0
Dec Null

Name,?




1 ?Name,zzt 0
Dec ASCII Null

Name,zzt

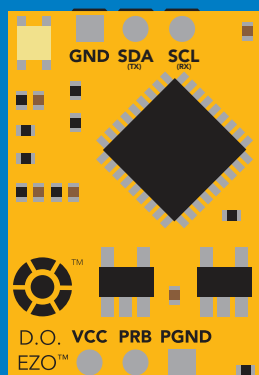

Name,?

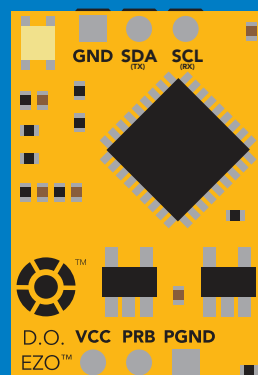

1 0

1 ?Name,zzt 0

Device information

Command syntax

300ms  processing delay

i device information

Example

i

Response



Wait 300ms

1

Dec

?i,D.O.,1.98

ASCII

0

Null

Response breakdown

?i, D.O., 1.98
↑ ↑
Device Firmware

Reading device status

Command syntax

300ms  processing delay

Status voltage at Vcc pin and reason for last restart

Example

Response

Status

 **1** **?Status,P,5.038** **0**
Wait 300ms Dec ASCII Null

Response breakdown

?Status, **P,** **5.038**
Reason for restart Voltage at Vcc

Restart codes

P powered off
S software reset
B brown out
W watchdog
U unknown

Sleep mode/low power

Command syntax

Sleep enter sleep mode/low power

Send any character or command to awaken device.

Example

Response

Sleep

no response

Do not read status byte after issuing sleep command.

Any command

wakes up device

5V

STANDBY

13.1 mA


SLEEP

0.66 mA


3.3V

12 mA


0.3 mA

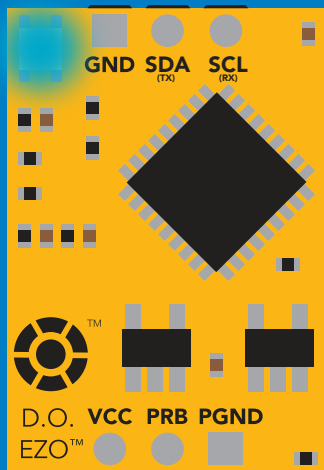

Standby



Sleep

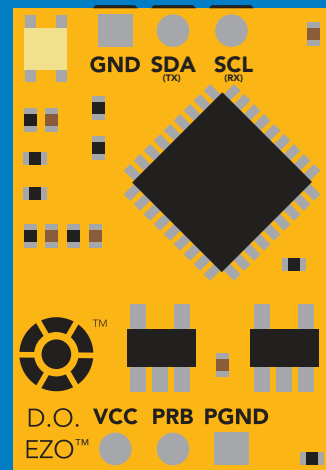

Sleep

Protocol lock

Command syntax

300ms  processing delay

Plock,1 enable Plock

Plock,0 disable Plock

Plock,? Plock on/off?

Locks device to I²C mode.

default

Example

Response

Plock,1


Wait 300ms


1	0
Dec	Null

Plock,0


Wait 300ms

1	0
Dec	Null




Plock,?


Wait 300ms

1	?Plock,1	0
Dec	ASCII	Null

Plock,1

Baud, 9600

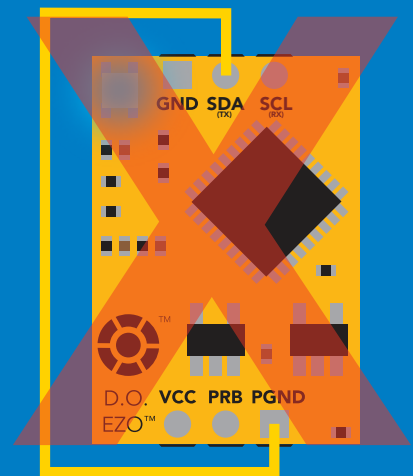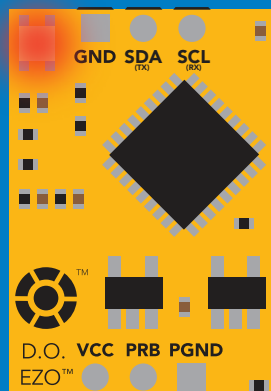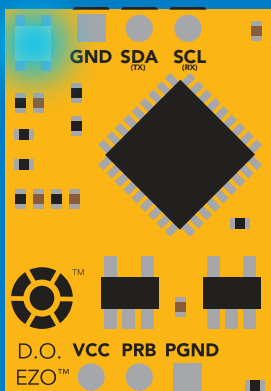

cannot change to UART

cannot change to UART

I²C address change

Command syntax

300ms  processing delay

I2C,n sets I²C address and reboots into I²C mode

Example

Response

I2C,100

device reboot
(no response given)




Warning!

Changing the I²C address will prevent communication between the circuit and the CPU until your CPU is updated with the new I²C address.

Default I²C address is 97 (0x61).

n = any number 1 – 127

I2C,100

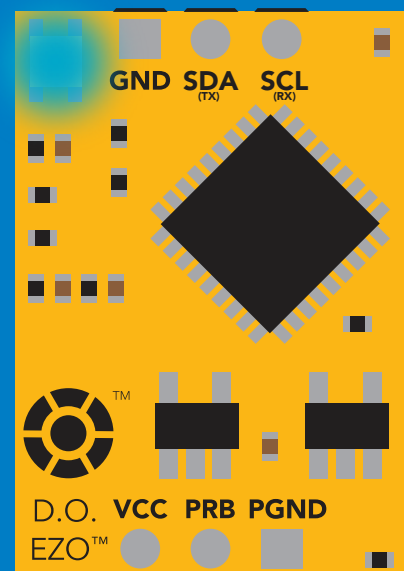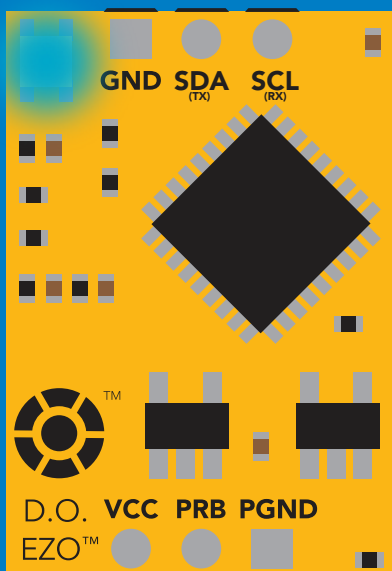

Factory reset

Command syntax

Factory reset will not take the device out of I²C mode.

Factory enable factory reset

I²C address will not change

Example



Response

Factory


device reboot
(no response given)

Clears calibration
LED on
Response codes enabled

Factory

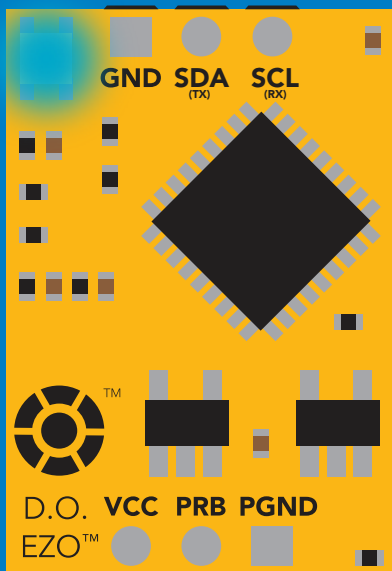

(reboot)

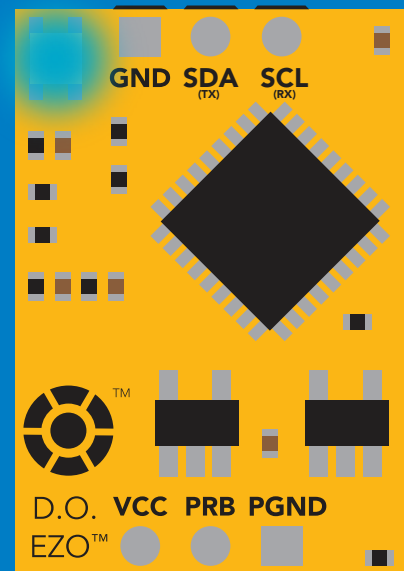

Change to UART mode

Command syntax

Baud,n switch from I²C to UART



Example

Baud,9600


Response

reboot in UART mode
(no response given)


n = [300
1200
2400
9600
19200
38400
57600
115200

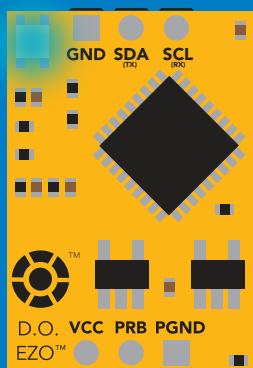


Baud,9600

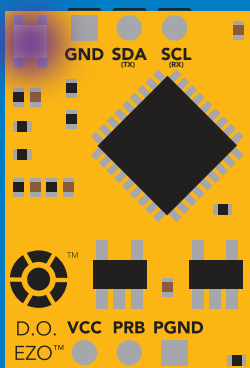

Changing to
UART mode




(reboot)

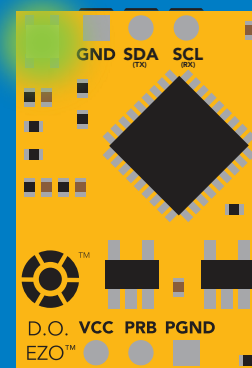


Manual switching to UART

- Disconnect ground (power off)
- Disconnect TX and RX
- Connect TX to PGND
- Confirm RX is disconnected
- Connect ground (power on)
- Wait for LED to change from Blue to Green
- Disconnect ground (power off)
- Reconnect all data and power

Example

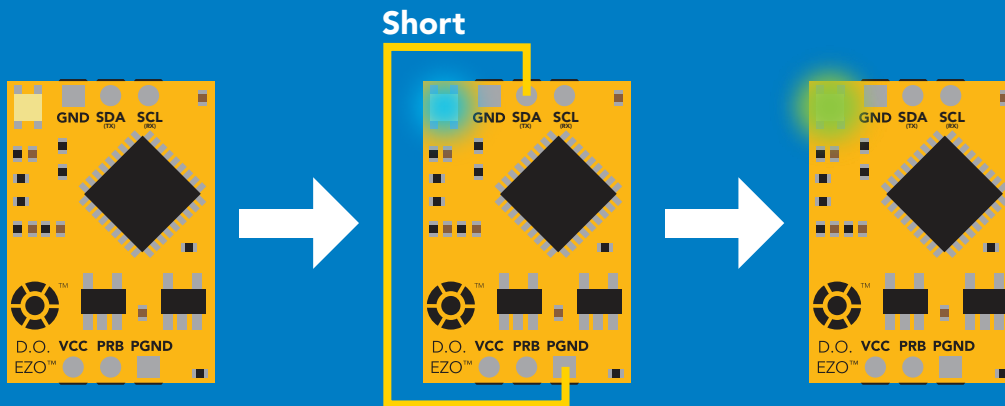

Wrong Example

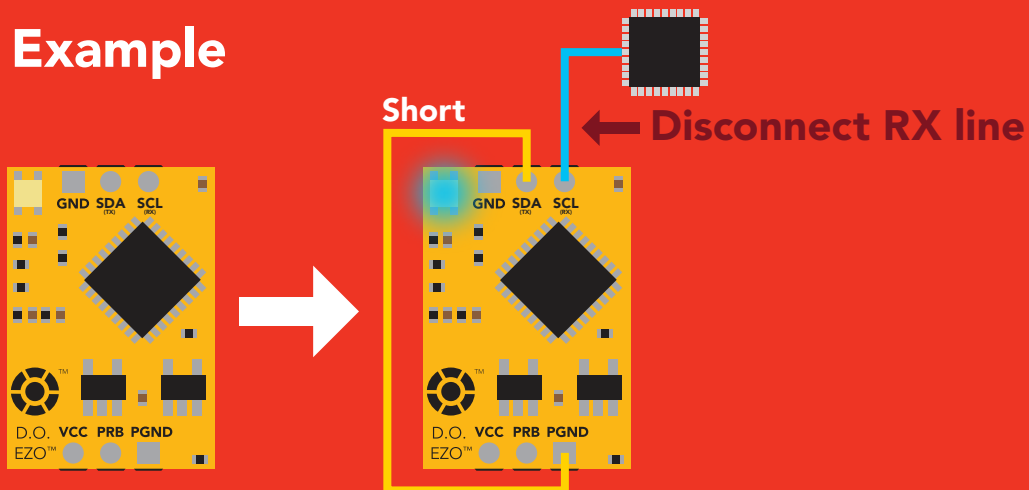

Calibration theory

The accuracy of your readings is directly related to the quality of your calibration.
(Calibration is not difficult, and a little bit of care goes a long way).

Confirm the D.O. probe is working correctly

Take readings in air first.



Readings > 10



Readings < 9 or > 25

*Refer to probes datasheet
for instructions.*

Calibrate first, compensate later

Compensating for temperature, pressure, and salinity will change your calibrated readings to a value that cannot easily be predicted. This makes it difficult to know if the probe has been calibrated correctly.

Default compensation values

Temp = 20 °C
Pressure = 101 kPa
Salinity = 0

Temp = 29 °C
Pressure = 93 kPa
Salinity = 5

(too many variables)

Known calibration value

9.09 Mg/L

???
(6.84 Mg/L)

Best practices for calibration

Always watch the readings throughout the calibration process.
Issue calibration commands once the readings have stabilized.



⚠ Never do a blind calibration! ⚠




Issuing a calibration command before the readings stabilize will result in drifting readings.



Calibration order

High point calibration

Remove the Dissolved Oxygen probe's cap and let the probe sit, exposed to air until the readings stabilize. (*small movement from one reading to the next is normal*).





After calibration is complete, you should see readings between **9.09 – 9.1X mg/L**. (*only if temperature, salinity and pressure compensation are at default values*)



Low point calibration

After you have calibrated the EZO™ Dissolved Oxygen circuit using the "Cal" command; Remove the top of the Zero Dissolved Oxygen calibration solution pouch, and Insert the probe and stir it around to remove any trapped air (which could cause readings to go high). Let the probe sit in Zero D.O. calibration solution until readings stabilize. (*small movement from one reading to the next is normal*).



Advanced calibration

Probe temperature calibration

Probe temperature calibration \neq Temperature compensation.

When a Dissolved Oxygen probe is calibrated, it is calibrated to the oxygen level and ambient temperature. As a D.O. probe is heated or cooled, its response curve will change. A small temperature change ($\leq 5^\circ\text{C}$) will not affect the probe. However, a large temperature change will be noticeable.




Calibrated probe

Air temperature

23°C

Air Reading


9.10 mg/L

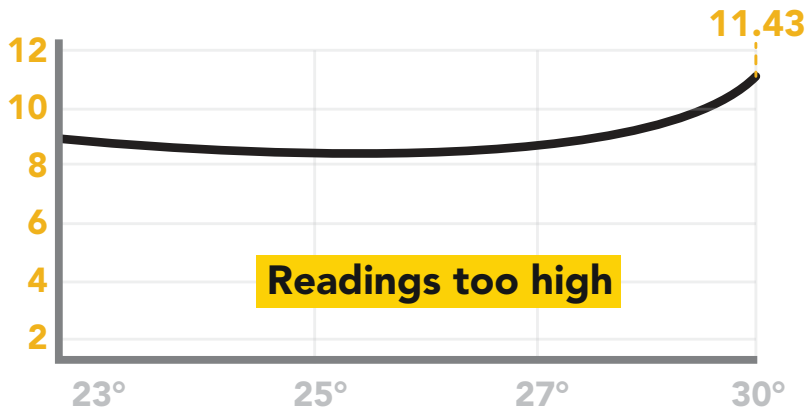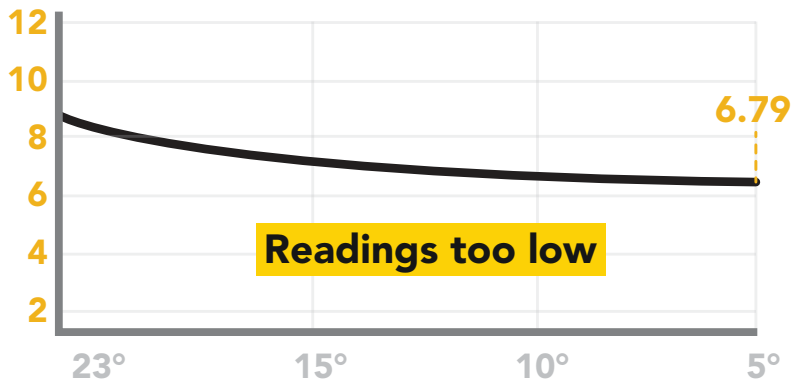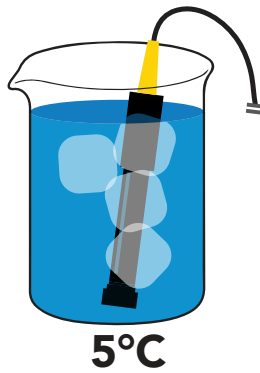

Advanced calibration

What to do:

After the Dissolved Oxygen probe has been properly calibrated, another calibration can be done to account for the probe temperature.

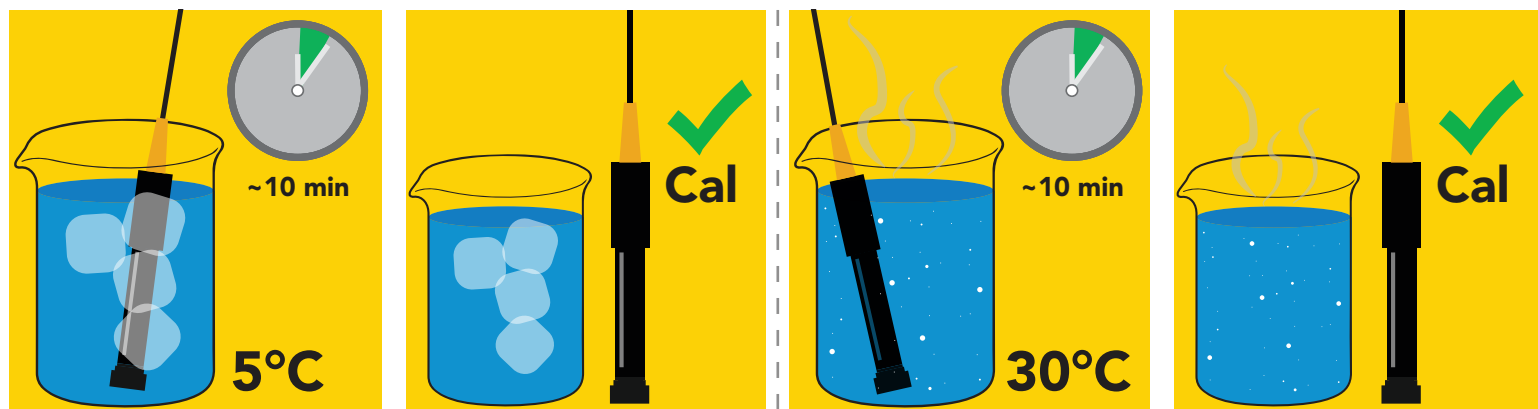


Let the probe acclimate to its operating temperature and then recalibrate. Once the probe has been calibrated at its intended operating temperature, using temperature compensation will give accurate readings.

Understanding D.O. measurements

Most chemical sensors do not directly measure the parameter they are designed for. Dissolved oxygen is no exception. A galvanic D.O. probe is actually an oxygen pressure sensor. It only measures the partial pressure of oxygen.

Keep this in mind when choosing a spot to place the probe.

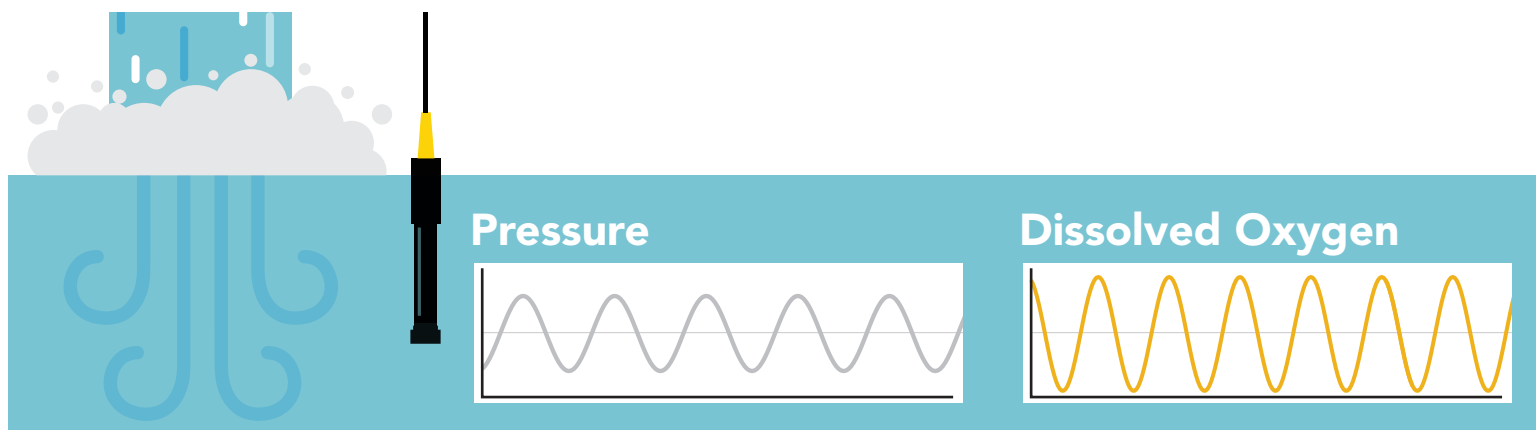

It just so happens that partial pressure of oxygen is the same in water as it is in air.

(While the pressure is the same, the amount is not. Pure water at sea level can only hold ~9 mg/L of oxygen, while the atmosphere holds ~300mg/L)

By comparing oxygens pressure to its solubility in water, the mg/L are derived.

There are three factors that affect waters ability to hold oxygen.

Temperature

Salinity

Atmospheric Pressure

Temperature

Water temperature has the largest effect; the colder the water, the more oxygen it holds. As water heats up, its ability to hold oxygen goes down.

Pure water at 1°C can hold 14.2 mg/L

And at 40°C it can only hold 6.4 mg/L


Understanding D.O. measurements

Salinity

When salt is added to water, it drives out oxygen by competing for the same space.

Sea water at 1°C can only hold 10.7 mg/L

Pure water at 1°C can hold 14.2 mg/L

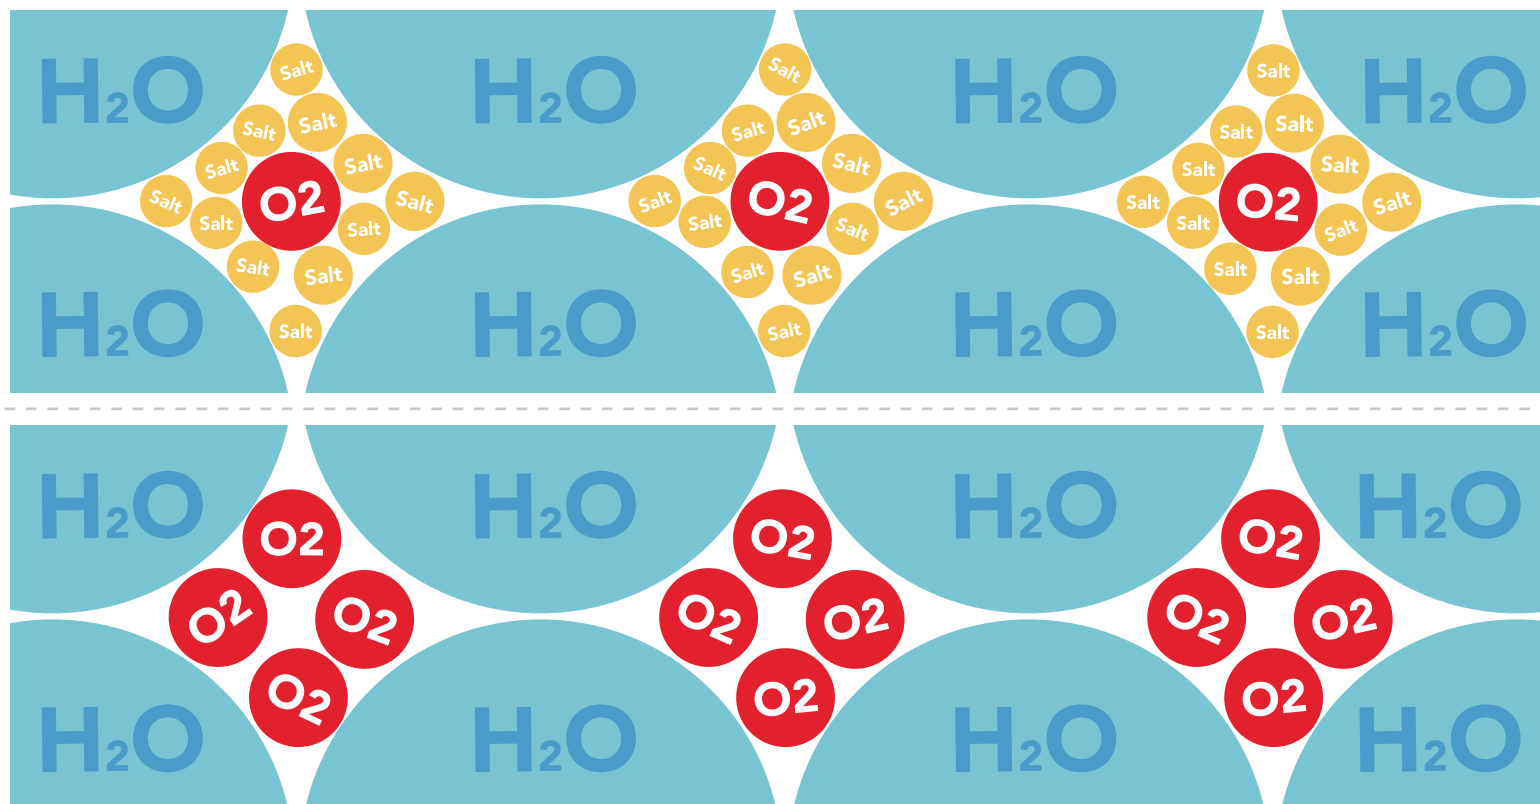

Atmospheric Pressure

A D.O. probe is an oxygen pressure sensor.

Dissolved oxygen pressure cannot be higher than atmospheric oxygen pressure. This is why the probe is calibrated to the atmosphere; it defines the probe's response to the maximum oxygen pressure available. However, oxygen pressure does not tell us how much oxygen is available to dissolve in the water. That information is derived from atmospheric pressure (where atmospheric pressure = altitude).


As altitude increases, oxygen concentration decreases, and because D.O. readings are expressed in Mg/L, the oxygen concentration must be known.

At sea level, 1°C pure water can hold 14.2 mg/L

At 1,500 meters, 1°C pure water can hold 11.7 mg/L

At -1,200 meters, 1°C pure water can hold 16.2 mg/L

Flow Dependence

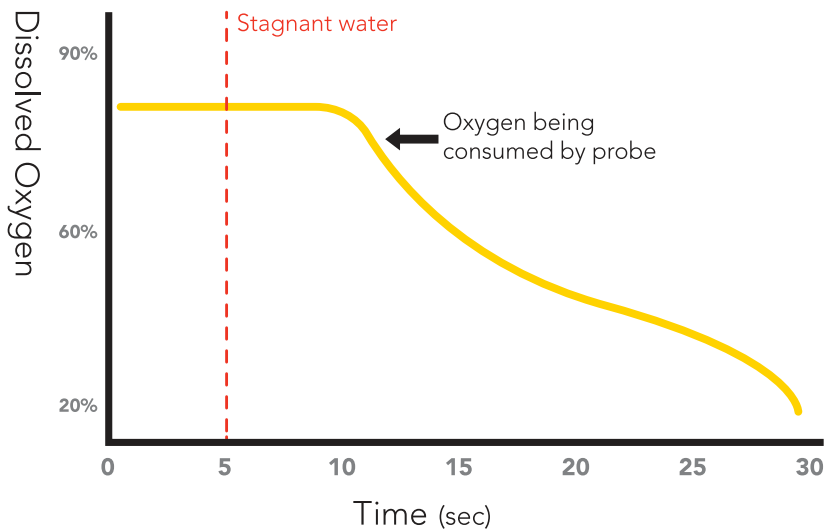


One of the drawbacks from using a galvanic probe is that it consumes a **VERY** small amount of the oxygen it reads. Therefore, a small amount of water movement is necessary to take accurate readings. **Approximately 60 ml/min.**

Hyper saturation with pure oxygen

Dissolved oxygen measurements are based on natural occurring oxygen levels. However, some applications may require pure oxygen to achieve extremely high saturation levels. Because injecting pure oxygen into water is not a naturally occurring event, you will need to change some compensation parameters to achieve extremely high readings.

To reach 100mg/L and a saturation of 350%


Set pressure compensation to: **202 kPa**
Set temperature compensation to: **1°C**

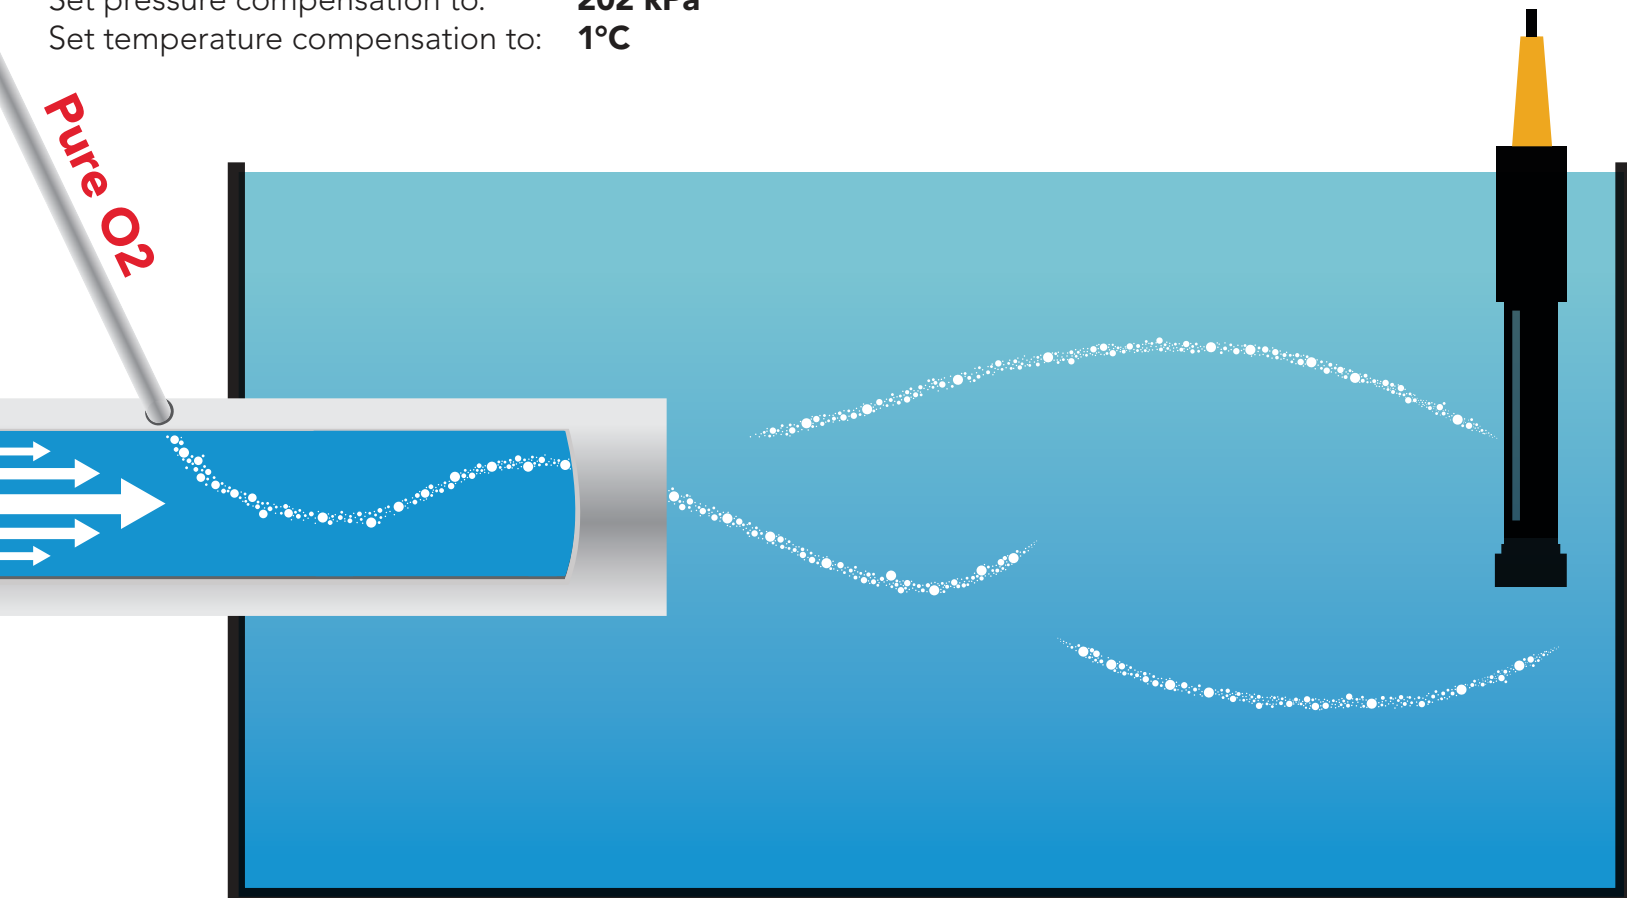

Soldering


Do not directly solder an EZO circuit to your PCB. If something goes wrong during the soldering process it may become impossible to correct the problem. It is simply not worth the risk.

Instead, solder female header pins to your PCB and place the EZO device in the female headers.

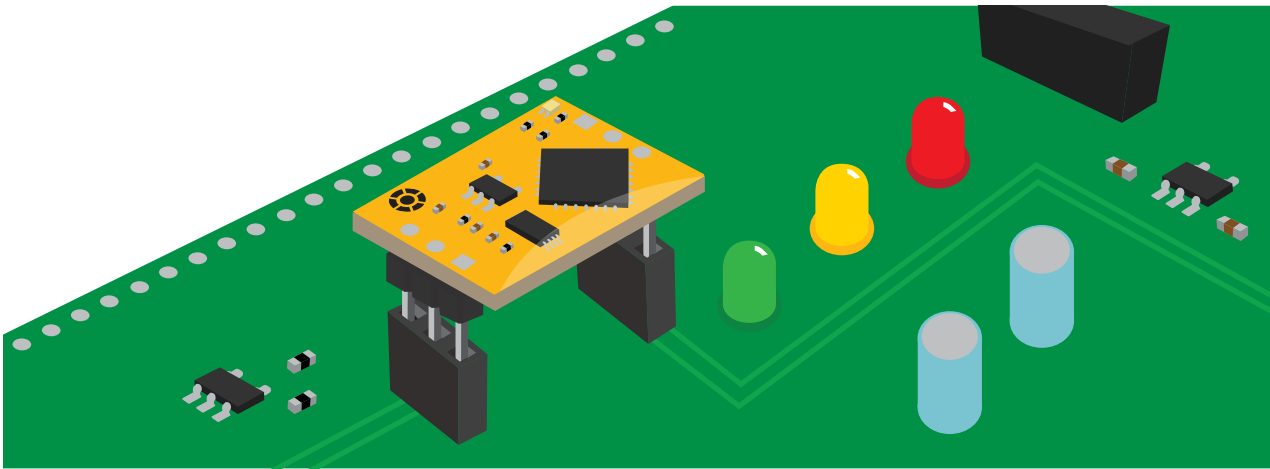

Avoid using rosin core solder.
Use as little flux as possible.


Flux residue will severely affect your readings. Any Flux residue that comes in contact with the PRB pins or your probes connector will cause a “flux short”.

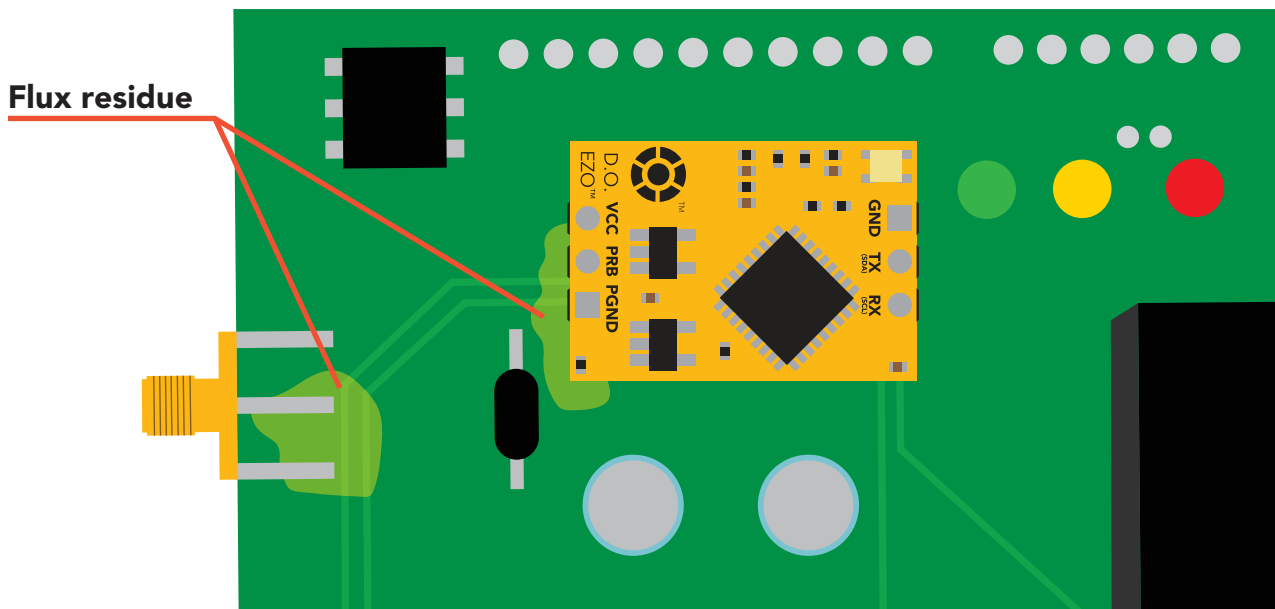


You **MUST** remove all the flux residue from your PCB after soldering.

Soldering

Removing flux residue can be done with commercially available products such as flux off or you can use alcohol and a tooth brush.

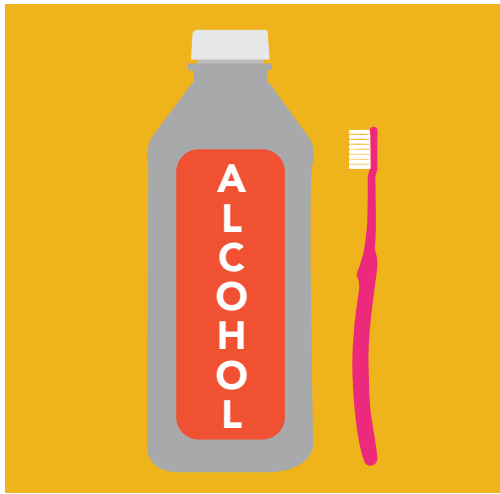

Remove EZO Circuit and soak in alcohol for 10 mins.

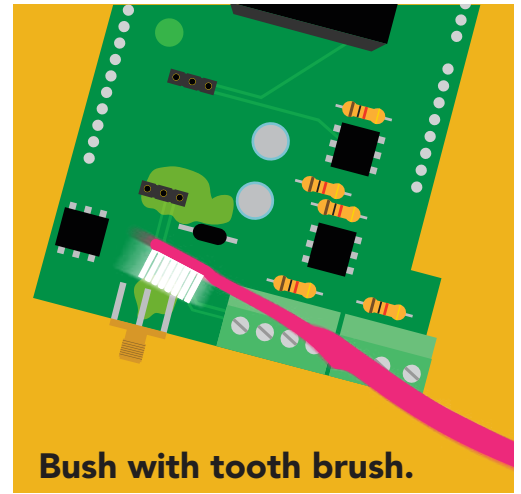


Bush with tooth brush.



Soak in alcohol for 5 mins.




Let it dry in the air.

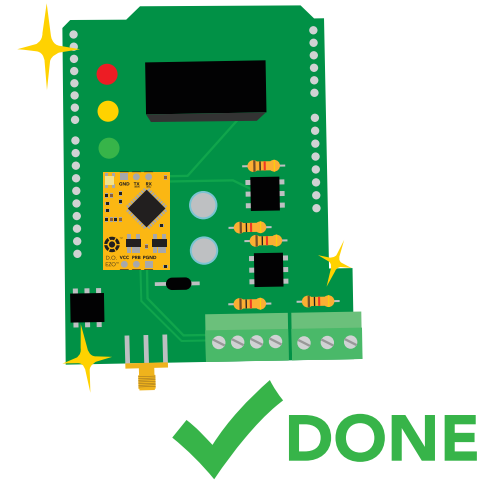


What does a flux short look like?

Readings move slowly and take several minutes to reach the correct value.


EZO™ circuit footprint

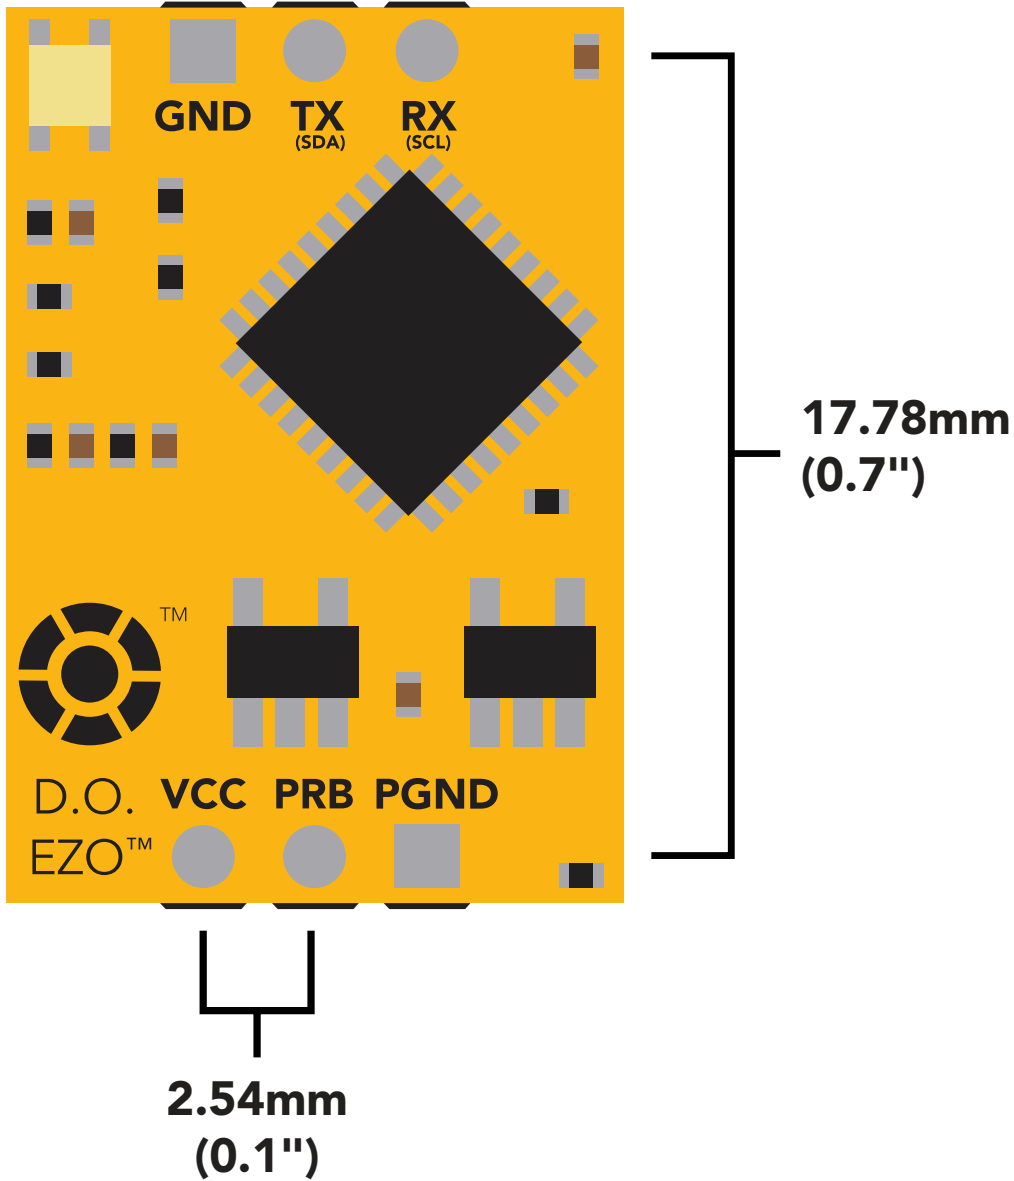


1 In your CAD software place a 8 position header.



2 Place a 3 position header at both top and bottom of the 8 position.



3 Delete the 8 position header. The two 3 position headers are now 17.78mm (0.7") apart from each other.

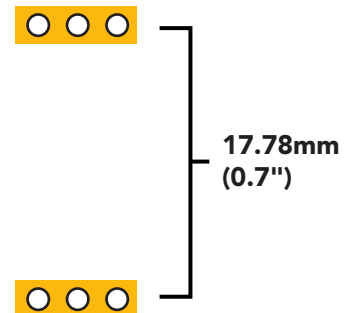

Datasheet change log

Datasheet V 5.6

Revised entire document.

Datasheet V 5.5

Revised naming device info on pages 32 & 59.

Datasheet V 5.4

Revised artwork within datasheet.

Datasheet V 5.3

Moved Default state to pg 13.

Datasheet V 5.2

Updated firmware changes on page 70.

Datasheet V 5.1

Revised response for the sleep command in UART mode on pg 36.

Datasheet V 5.0

Revised calibration theory on page 9, and added more information on the Export calibration and Import calibration commands.

Datasheet V 4.9

Corrected temperature compensation typo on pages 26 & 52.

Datasheet V 4.8

Revised isolation schematic on pg. 10

Datasheet V 4.7

Added new command:

"RT,n" for Temperature compensation located on pages 26 (UART) & 52 (I²C).

Added firmware information to Firmware update list.

Datasheet change log

Datasheet V 4.6

Added more information about temperature compensation on pages 26 & 52.

Datasheet V 4.5

Changed "Max rate" to "Response time" on cover page.

Datasheet V 4.4

Removed note from certain commands about firmware version.

Datasheet V 4.3

Added information to calibration theory on pg 7.

Datasheet V 4.2

Revised definition of response codes on pg 44.

Datasheet V 4.1

Updated firmware changes on pg. 66.

Datasheet V 4.0

Revised Enable/disable parameters information on pages 29 (UART) & 55 (I²C).

Datasheet V 3.9

Revised information on cover page.

Datasheet V 3.8

Update firmware changes on pg. 66.

Datasheet V 3.7

Revised Plock pages to show default value.

Datasheet change log

Datasheet V 3.6

Added new commands:

"Find" pages 21 (UART) & 48 (I²C).

"Export/Import calibration" pages 25 (UART) & 51 (I²C).

Added new feature to continuous mode "C,n" pg 22.

Datasheet V 3.5

Added accuracy range on cover page, and revised isolation info on pg. 10.

Datasheet V 3.4

Added manual switching to UART information on pg. 59.

Datasheet V 3.3

Updated firmware changes to reflect V1.99 update.

Datasheet V 3.2

Revised entire datasheet.

Firmware updates

V1.1 – Initial release (Oct 30, 2014)

- Change output to mg/L, then percentage (was previously percentage, then mg/L).

V1.5 – Baud rate change (Nov 6, 2014)

- Change default baud rate to 9600

V1.6 – I²C bug (Dec 1, 2014)

- Fixed I²C bug where the circuit may inappropriately respond when other I²C devices are connected.

V1.7 – Factory (April 14, 2015)

- Changed "X" command to "Factory"

V1.95 – Plock (March 31, 2016)

- Added protocol lock feature "Plock"

V1.96 – EEPROM (April 26, 2016)

- Fixed bug where EEPROM would get erased if the circuit lost power 900ms into startup.

V1.97 – EEPROM (Oct 10, 2016)

- Fixed bug in the cal clear command, improves how it calculates the DO, adds calibration saving and loading.

V1.98 – EEPROM (Nov 14, 2016)

- Updated firmware for new circuit design.

V1.99 – (Feb 2, 2017)

- Revised "O" command to accept mg.

V2.10 – (April 12, 2017)

- Added "Find" command.
- Added "Export/import" command.
- Modified continuous mode to be able to send readings every "n" seconds.

V2.11 – (Sept 28, 2017)

- Fixed bug where the temperature would default to 0 on startup.

V2.12 – (Dec 19, 2017)

- Improved accuracy of dissolved oxygen equations.

V2.13 – (July 16, 2018)

- Added "RT" command to Temperature compensation.

V2.14 – (June 7, 2019)

- Fixed bug where the output buffer overflows when the cal and cal,0 point are too close together.

Firmware updates

V2.15 – (Sept 8, 2022)

- Internal update for new part compatibility.

Warranty

Atlas Scientific™ Warranties the EZO™ class Dissolved Oxygen circuit to be free of defect during the debugging phase of device implementation, or 30 days after receiving the EZO™ class Dissolved Oxygen circuit (which ever comes first).

The debugging phase

The debugging phase as defined by Atlas Scientific™ is the time period when the EZO™ class Dissolved Oxygen circuit is inserted into a bread board, or shield. If the EZO™ class Dissolved Oxygen circuit is being debugged in a bread board, the bread board must be devoid of other components. If the EZO™ class Dissolved Oxygen circuit is being connected to a microcontroller, the microcontroller must be running code that has been designed to drive the EZO™ class Dissolved Oxygen circuit exclusively and output the EZO™ class Dissolved Oxygen circuit data as a serial string.

It is important for the embedded systems engineer to keep in mind that the following activities will void the EZO™ class Dissolved Oxygen circuit warranty:

- Soldering any part of the EZO™ class Dissolved Oxygen circuit.
- Running any code, that does not exclusively drive the EZO™ class Dissolved Oxygen circuit and output its data in a serial string.
- Embedding the EZO™ class Dissolved Oxygen circuit into a custom made device.
- Removing any potting compound.

Reasoning behind this warranty

Because Atlas Scientific™ does not sell consumer electronics; once the device has been embedded into a custom made system, Atlas Scientific™ cannot possibly warranty the EZO™ class Dissolved Oxygen circuit, against the thousands of possible variables that may cause the EZO™ class Dissolved Oxygen circuit to no longer function properly.

Please keep this in mind:

- 1. All Atlas Scientific™ devices have been designed to be embedded into a custom made system by you, the embedded systems engineer.**
- 2. All Atlas Scientific™ devices have been designed to run indefinitely without failure in the field.**
- 3. All Atlas Scientific™ devices can be soldered into place, however you do so at your own risk.**

Atlas Scientific™ is simply stating that once the device is being used in your application, Atlas Scientific™ can no longer take responsibility for the EZO™ class Dissolved Oxygen circuits continued operation. This is because that would be equivalent to Atlas Scientific™ taking responsibility over the correct operation of your entire device.