

Monitoring relays

70
SERIES



Air
conditioners



Wood-
processing
machines



Hoists and
cranes



Escalators



Control panels
for pumps



Forced-air
ventilators



- Electronic voltage monitoring relays for single and three-phase applications**
- Multifunctional types, providing the flexibility of monitoring Undervoltage, Overvoltage, Window Mode, Phase rotation, Phase loss
 - Positive safety logic - Make output contact opens if the relay detects an error
 - All functions and values can be easily adjusted by the selector and trimmer on front face
 - "Blade + cross" – both flat blade and cross head screw drivers can be used to adjust the regulators and the function selector
 - Colored LEDs for clear & immediate visual indication
 - 1 CO relay output, 6 or 10 A
 - Modular housing, 17.5 or 35 mm wide
 - 35 mm rail (EN 60715) mount
 - Cd-free contact material

Screw terminal



70.11



Single-phase (220...240)V voltage monitoring:

- Undervoltage
- Overvoltage
- Window mode (overvoltage + undervoltage)
- Voltage fault memory selectable

70.31



Three-phase (380...415)V voltage monitoring:

- Undervoltage
- Overvoltage
- Window mode (overvoltage + undervoltage)
- Voltage fault memory selectable
- Phase loss, even under phase regeneration
- Phase rotation

For outline drawing see page 16

Contact specification

Contact configuration		1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	10/30	6/10
Rated voltage/ Max. switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2500	1500
Rated load AC15	VA	750	500
Single phase motor rating (230 V AC)	kW	0.5	0.185
Breaking capacity DC1: 24/110/220 V	A	10/0.3/0.12	6/0.2/0.12
Minimum switching load	mW (V/mA)	300 (5/5)	500 (12/10)
Standard contact material		AgNi	AgNi

Supply specification

Nominal system voltage (U_N)	V AC (50/60 Hz)	220...240	380...415
Rated power	VA (50 Hz)/W	2.6/0.8	11/0.9
Operating range	V AC (50/60 Hz)	130...280	220...510

Technical data

Electrical life at rated load AC1	cycles	$80 \cdot 10^3$	$60 \cdot 10^3$
Voltage detection level range	V	170...270	300...480
Asymmetry detection level range	%	—	—
Switch-off delay time (T on function diagrams)	s	0.5...60	0.5...60
Switch-on lock-out time	s	0.5	1
Switch-on hysteresis (H on function diagrams)	V	5 (L-N)	10 (L-L)
Power-on activation time	s	≈ 1	≈ 1
Insulation between supply and contacts (1.2/50 μ s)	kV	4	4
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature	°C	-20...+60	-20...+60
Protection category		IP 20	IP 20
Approvals (according to type)			

Electronic voltage monitoring relays for three-phase applications

- Multifunctional types, providing the flexibility of monitoring Undervoltage, Overvoltage, Window Mode, Phase rotation, Phase loss, Asymmetry and Neutral loss
- Phase loss monitoring, even under phase regeneration
- Positive safety logic - Make output contact opens if the relay detects an error
- All functions and values can be easily adjusted by the selector and trimmer on front face
- “Blade + cross” – both flat blade and cross head screw drivers can be used to adjust the regulators and the function selector
- Colored LEDs for clear & immediate visual indication
- 1 or 2 CO relay output, 6 or 8 A
- Modular housing, 35 mm wide
- 35 mm rail (EN 60715) mount
- Cd-free contact material

Screw terminal

**70.41**

Three-phase (380...415 V, with or without neutral) voltage monitoring:

- Window mode (overvoltage + undervoltage)
- Phase loss
- Phase rotation
- Asymmetry
- Neutral loss selectable

70.42

Three-phase (380...415 V, with neutral) voltage monitoring:

- Undervoltage
- Overvoltage
- Window mode (overvoltage + undervoltage)
- Voltage fault memory selectable
- Phase loss
- Phase rotation
- Asymmetry
- Neutral loss

For outline drawing see page 16

Contact specification

Contact configuration	1 CO (SPDT)	2 CO (DPDT)
Rated current/Maximum peak current A	6/10	8/15
Rated voltage/ Max. switching voltage V AC	250/400	250/400
Rated load AC1 VA	1500	2000
Rated load AC15 VA	500	400
Single phase motor rating (230 V AC) kW	0.185	0.3
Breaking capacity DC1: 24/110/220 V A	6/0.2/0.12	8/0.3/0.12
Minimum switching load mW (V/mA)	500 (12/10)	300 (5/5)
Standard contact material	AgNi	AgNi

Supply specification

Nominal system voltage (U_N) V AC (50/60 Hz)	380...415	380...415
Rated power VA (50 Hz)/W	11/0.9	12.5/1
Operating range V AC (50/60 Hz)	220...510	220...510

Technical data

Electrical life at rated load AC1 cycles	$60 \cdot 10^3$	$60 \cdot 10^3$
Voltage detection level range V	300...480	300...480
Asymmetry detection level range %	4...25	5...25
Switch-off delay time (T on function diagrams) s	0.5...60	0.5...60
Switch-on lock-out time s	1	1
Switch-on hysteresis (H on function diagrams) V	10 (L-L)	10 (L-L)
Power-on activation time s	≈ 1	≈ 1
Insulation between supply and contacts (1.2/50 μ s) kV	4	4
Dielectric strength between open contacts V AC	1000	1000
Ambient temperature $^{\circ}$ C	-20...+60	-20...+60
Protection category	IP 20	IP 20
Approvals (according to type)		

Universal current detecting and monitoring relays

Type 70.51.0.240.2032

- Current Control standard version

Type 70.51.0.240.N032

- Current Control Programmable via NFC version

Multifunctional type, providing the flexibility of monitoring Undercurrent, Overcurrent and Window Mode

- Positive safety logic - Make output contact opens if the relay detects an error
- All functions and values can be easily adjusted by the selector and trimmer on front face (70.51.0.240.2032) OR via NFC toolbox APP (70.51.0.240.N032)
- "Blade + cross" – both flat blade and cross head screw drivers can be used to adjust the regulators and the function selector
- Colored LED for clear & immediate visual indication
- 1 CO 10 A relay output
- Modular housing, 35 mm wide

NEW 70.51.0.240.2032



NEW 70.51.0.240.N032



- 6 Functions universal current monitoring relay
- AC/DC current detection 50 mA...16 A
- Fault memory selectable
- Switch-on hysteresis (5...50)% (1...99% in Window Mode)

- 6 Functions universal current monitoring relay
- AC/DC current detection 50 mA...16 A
- Programmable via Toolbox NFC app

Screw Terminal



For outline drawing see page 16

Contact specification

Contact configuration	1 CO (SPDT)	
Rated current/Maximum peak current	A	10/15
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	2500
Rated load AC15 (230 V AC)	VA	500
Single phase motor rating (230 V AC)	kW	0.5
Breaking capacity DC1: 24/110/220 V	A	10/0.3/0.12
Minimum switching load	mW (V/mA)	300 (5/5)
Standard contact material	AgSnO ₂	

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	24...240
	V DC	24...240
Rated power AC/DC	VA (50 Hz)/W	2.5/0.53
Operating range	AC	(0.8...1.1)U _N
	DC	(0.8...1.1)U _N

Technical data

Electrical life at rated load AC1	cycles	100 · 10 ³
Detection levels	AC(50/60 Hz)/DC	50 mA...16 A
Switch-on lock-out time (T1 on function diagrams)	s	0.1...40
Switch-on hysteresis (H on function diagrams)	%	5...50 (1...99 in Window Mode)
Switch-off delay time (T2 on function diagrams)	s	0.1...30
Electrical isolation: Supply to Measuring circuits		Yes
Ambient temperature range	°C	-20...+55
Protection category		IP 20
Approvals (according to type)		  

Electronic phase loss and rotation monitoring relays for three-phase applications

- Universal voltage monitoring (U_N from 208 V to 480 V, 50/60 Hz)
- Phase loss monitoring, even under phase regeneration
- Positive safety logic - Make contact opens if the relay detects an error
- 2 versions:
 - 1 CO relay output, 6 A (17.5 mm wide), and
 - 2 CO relay output, 8 A (22.5 mm wide)
- 35 mm rail (EN 60715) mount
- European patent pending for the innovative principle at the root of the 3 phase monitoring and error survey system (70.61)

70.61
Screw terminal



70.61-P000
Push-in terminal


NEW
70.61/70.61-P000


Three-phase (208...480)V voltage monitoring:

- Phase loss
- Phase rotation

70.62


Three-phase (208...480)V voltage monitoring:

- Phase loss
- Phase rotation

E

For outline drawing see page 17

Contact specification

Contact configuration	1 CO (SPDT)	2 CO (DPDT)
Rated current/Maximum peak current A	6/15	8/15
Rated voltage/ Max. switching voltage V AC	250/400	250/400
Rated load AC1 VA	1500	2000
Rated load AC15 VA	250	400
Single phase motor rating (230 V AC) kW	0.185	0.3
Breaking capacity DC1: 24/110/220 V A	3/0.35/0.2	8/0.3/0.12
Minimum switching load mW (V/mA)	500 (10/5)	300 (5/5)
Standard contact material	AgSnO ₂	AgNi

Supply specification

Nominal system voltage (U_N) V AC (50/60 Hz)	208...480	208...480
Rated power VA (50 Hz)/W	8/1	11/0.8
Operating range V AC (50/60 Hz)	170...500	170...520

Technical data

Electrical life at rated load AC1 cycles	100 · 10 ³	60 · 10 ³
Switch-off delay time s	0.5	0.5
Switch-on lock-out time s	0.5	0.5
Power-on activation time s	< 2	< 2
Insulation between supply and contacts (1.2/50 µs) kV	5	5
Dielectric strength between open contacts V AC	1000	1000
Ambient temperature °C	-20...+60	-20...+60
Protection category	IP 20	IP 20

Approvals (according to type)


- Thermistor temperature sensing relays for industrial application**
- Temperature detection with PTC
 - PTC short circuit detection
 - PTC wire breakage detection
 - Positive safety logic - Make contact opens if the relay detects an error
 - Fault memory selectable
 - LED status indication
 - 35 mm rail (EN 60715) mounting

NEW 70.92.x.xxx.0002



Screw Terminal



- 6 functions
- RESET delay time (0.5s or 3s) selectable
- RESET terminals

For outline drawing see page 17

Contact specification

Contact configuration	2 CO (DPDT)	
Rated current/Maximum peak current	A	8/15
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	2000
Rated load AC15 (230 V AC)	VA	400
Single phase motor rating (230 V AC)	kW	0.3
Breaking capacity DC1: 24/110/220 V	A	8/0.3/0.12
Minimum switching load	mW (V/mA)	300 (5/5)
Standard contact material	AgNi	

Supply specification

Nominal voltage (U_N)	V AC (50/60 Hz)	230
	V AC/DC	24
Rated power AC/DC	VA (50 Hz)/W	1/0.5
Operating range	AC	184...253

AC/DC 19.2...26.4

Technical data

Electrical life at rated load AC1	cycles	$100 \cdot 10^3$
PTC detecting:	Short circuit/Temperature OK	$<20 \Omega / >20 \Omega \dots <3 \Omega$
	RESET/PTC break	$<1.3 \Omega / >3 \Omega$
RESET delay time	s	0.5 or 3
Ambient temperature range	°C	-20...+55
Protection category		IP 20
Approvals (according to type)		

Ordering information

Example: 70 series, three-phase voltage monitoring relays, 1 output, supply voltage 380...415 V AC.

	7	0	.	3	1	8	.	4	0	0	.	2	.	0	.	2	.	2
Series																		
Type																		
1 = 1 phase AC line monitoring																		
3 = 3 phase line monitoring																		
4 = 3 phase + neutral AC line monitoring																		
5 = AC/DC universal- Current detection																		
6 = 3 phase loss and rotation monitoring																		
9 = Thermistor relays (temperature monitoring with PTC thermistor)																		
No. of poles																		
1 = 1 pole																		
2 = 2 pole																		
Supply version																		
0 = AC (50/60 Hz)/DC																		
8 = AC (50/60 Hz)																		
E																		
Supply voltage																		
024 = 24 V AC/DC (70.92)																		
230 = 230 V (70.92)																		
230 = 220...240 V (70.11)																		
240 = 240 V AC/DC (70.51)																		
400 = 380...415 V (70.31/41/42)																		
400 = 208...480 V (70.61/62)																		
D: Fault memory option																		
0 = No fault memory																		
2 = Fault memory function selectable																		
C: Time delay setting																		
0 = Fixed switch-off delay																		
2 = Adjustable switch-off delay																		
3 = Adjustable switch-off delay and asymmetry (for 70.41 and 70.42 only)																		
Adjustable switch-off and switch-on delay (for 70.51 only)																		
B: Contact circuit																		
0 = CO (nPDT)																		
A: Detection Values / Terminals options																		
0 = Non-adjustable detection values																		
2 = 2 adjustable detection values																		
P = Push-in terminals (70.61 only)																		
N = Programmable via NFC (70.51 only)																		
Codes																		
70.11.8.230.2022																		
70.31.8.400.2022																		
70.41.8.400.2030																		
70.42.8.400.2032																		
70.51.0.240.2032																		
70.51.0.240.2032																		
70.51.0.240.N032																		

Selection guide

Type	70.11.8.230.2022	70.31.8.400.2022	70.41.8.400.2030	70.42.8.400.2032	70.51.0.240.x032	70.61.8.400.P000	70.62.8.400.0000	70.92.x.xxx.0002
Supply system type	Single phase	3-phase	3-phase / 3-phase + neutral	3-phase + neutral	Single phase	3-phase	3-phase	Single phase
Functions								
Undervoltage/Ovvervoltage	AC	AC	—	AC	—	—	—	—
Window mode (Undervoltage and Ovvervoltage)	AC	AC	AC	AC	—	—	—	—
Phase loss	—	•	•	•	—	•	•	—
Phase rotation	—	•	•	•	—	•	•	—
Asimmetry	—	—	•	•	—	—	—	—
Neutral loss	—	—	•	•	—	—	—	—
Overcurrent/Undercurrent	—	—	—	—	•	—	—	—
Window mode (Undercurrent and Overcurrent)	—	—	—	—	•	—	—	—
Thermistor relay (PTC)	—	—	—	—	—	—	—	•
Delay Times								
Fixed	—	—	—	—	—	•	•	•
Adjustable	•	•	•	•	•	—	—	—
Supply voltage								
24 V AC/DC	—	—	—	—	—	—	—	•
24...240 V AC/DC	—	—	—	—	•	—	—	—
230 V AC	•	—	—	—	—	—	—	•
400 V AC	—	•	•	•	—	•	•	—
Module width								
35 mm wide	—	•	•	•	•	—	—	—
22.5 mm wide	—	—	—	—	—	—	•	•
17.5 mm wide	•	—	—	—	—	•	—	—
Other data								
Fault memory	•	•	—	•	•	—	—	•
Contact configuration	1 CO	1 CO	1 CO	2 CO	1 CO	1 CO	2 CO	2 CO




Technical data

Insulation			70.11/31/41/42	70.51	70.61	70.62/92
Between supply and contacts	dielectric strength	V AC	2500	2500	2500	3000
	impulse (1.2/50 µs)	kV	4	4	5	5
Between open contacts	dielectric strength	V AC	1000	1000	1000	1000
	impulse (1.2/50 µs)	kV	1.5	1.5	1.5	1.5
EMC specifications						
Type of test		Reference standard				
Electrostatic discharge	contact discharge		EN 61000-4-2		4 kV	
	air discharge		EN 61000-4-2		8 kV	
Radiated electromagnetic field	80...1000 MHz		EN 61000-4-3		10 V/m	
	1...2.8 GHz		EN 61000-4-3		5 V/m	
Fast transients (burst 5/50 ns, 5 and 100 kHz)	on supply terminals		EN 61000-4-4		4 kV	
	common mode		EN 61000-4-5		4 kV	
Voltage pulses on supply terminals (surge 1.2/50 µs)	differential mode		EN 61000-4-5		4 kV	
	Radiofrequency common mode voltage (0.15...230 MHz)	on supply terminals	EN 61000-4-6		10 V	
Voltage dips	70% U _N		EN 61000-4-11		25 cycles	
Short interruptions			EN 61000-4-11		1 cycle	
Radiofrequency conducted emissions	0.15...30 MHz		CISPR 11		class B	
Radiated emissions	30...1000 MHz		CISPR 11		class B	
Terminals		Screw terminals			Push-in terminals	
Wire strip length		mm	10		10	
 Screw torque		Nm	0.8		—	
Min. wire size			Solid cable		Solid cable	
		mm ²	0.5		0.75	
		AWG	20		18	
Max. wire size			Solid cable		Solid cable	
		mm ²	1 x 6 / 2 x 4		1 x 1.5 / 2 x 1.5	
		AWG	1 x 10 / 2 x 12		1 x 16 / 2 x 16	
Min. wire size			Stranded cable		Stranded cable	
		mm ²	0.5		0.75	
		AWG	20		18	
Max. wire size			Stranded cable		Stranded cable	
		mm ²	1 x 4 / 2 x 2.5		1 x 2.5 / 2 x 2.5	
		AWG	1 x 12 / 2 x 14		1 x 14 / 2 x 14	
Other data			70.11	70.31/41	70.42/61/62/92	70.51
Power lost to the environment	without output current	W	0.8	0.9	1	2 (230 V AC) / 0.2 (24 V DC)
	with rated output current	W	2	1.2	1.4	2.5 (230 V AC) / 0.5 (24 V DC)

E






Functions

Output relay On (NO closed) when all OK: positive logic.

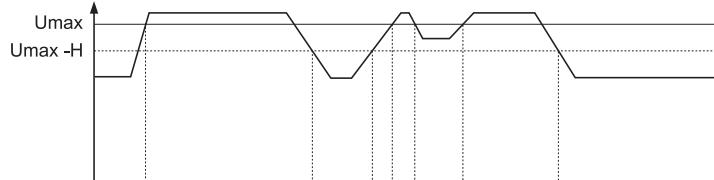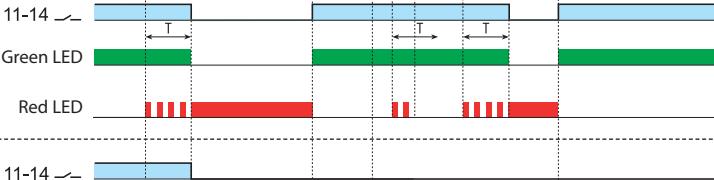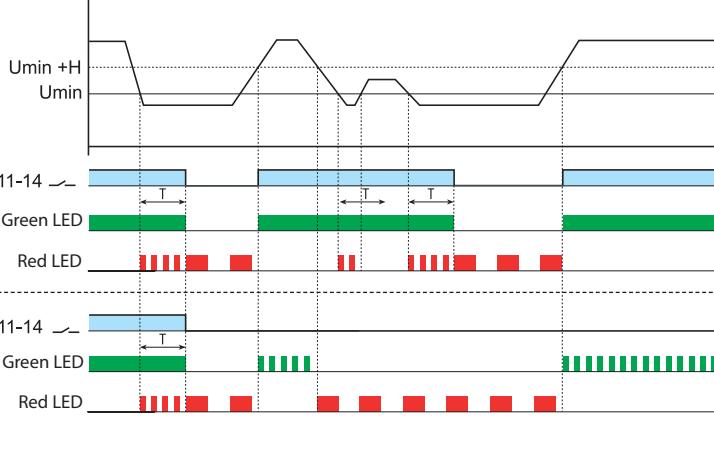Type 70.11 70.31 70.42	Overvoltage (OV and OVm functions)	Functions  
	Without memory	
	With memory	
Type 70.11 70.31 70.42	Undervoltage (UV and UVm functions)	<p>If the voltage moves out of limits, following delay T the output relay turns Off.</p> <p>When the voltage is again within limits (\pm the Switch-on hysteresis H):</p> <ul style="list-style-type: none"> - if set in the "without memory" position, the output relay "recovers", i.e. it turns On (after the Switch-on lock-out time) without any memory of the previous event. - if set in the "with memory" position (70.11, 70.42 and 70.31 only), the output relay remains open. To reset, it is necessary to switch the supply Off and then On again, or to rotate the selector first to an adjacent position and then to the original position.
	Without memory	
	With memory	
Type 70.11 70.31 70.41 (70.41 without memory) 70.42	Window mode (overvoltage + undervoltage, W and Wm functions)	
	Without memory	
	With memory	






Functions

Output relay On (NO closed) when all OK: positive logic.

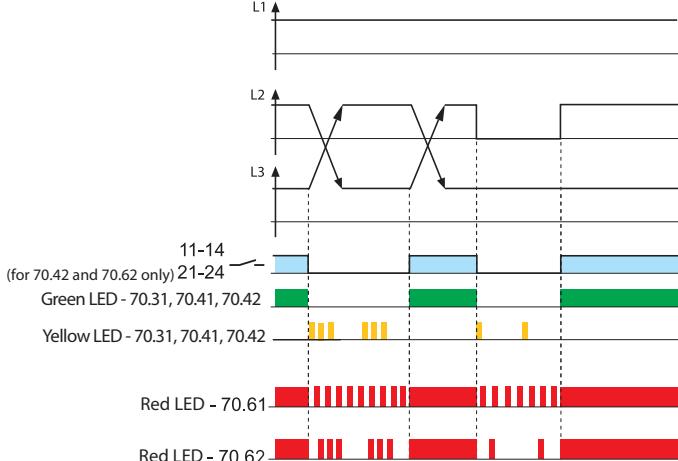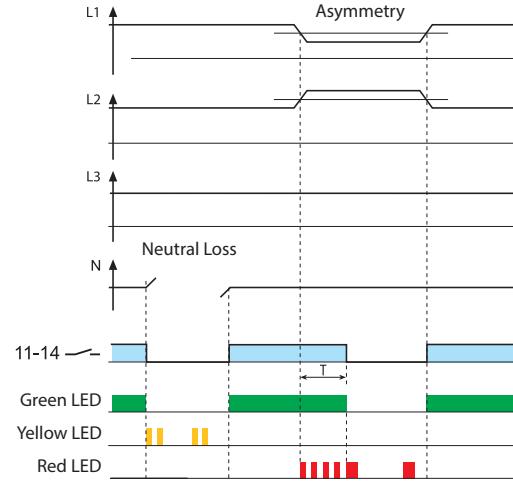
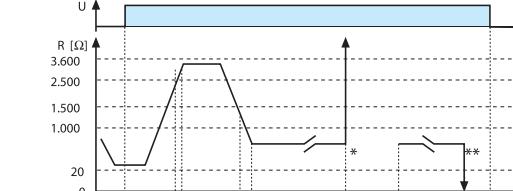
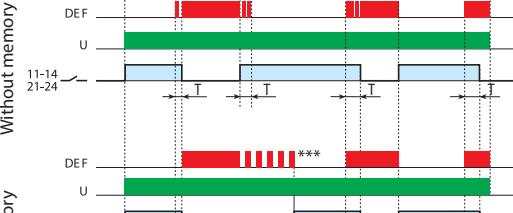
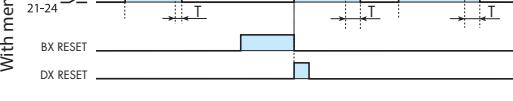
Type 70.31 70.41 70.42 70.61 70.62	Phase loss and phase rotation	<p>If the sequence (L1, L2, L3) is incorrect at power-on, the output relay will not turn-on.</p> <p>If a phase is lost, the output relay turns off immediately. When the phase is again active, the output relay turns on immediately.</p> <p>Phase loss monitoring possible even under regeneration up to 80% of the average of the other 2 phases.</p> 
	Neutral loss and asymmetry	<p>If the neutral is lost (and the Neutral control function is set), the output relay turns off immediately. When the neutral is again present, the output relay turns on immediately</p> <p>If the asymmetry ($U_{max} - U_{min}$)/U_N is above the % set value, the output relay turns off after the set delay T. When the asymmetry is again below the % set value (with a fixed hysteresis of approximately 2%), the output relay turns on after the Switch-on lock-out time.</p> 
Type 70.92	 <p>Without memory</p>  <p>With memory</p> 	<p>The contact open if:</p> <ul style="list-style-type: none"> - thermistor line break - over temperature $R_{PTC} > (2.5...3.6)k\Omega$ - thermistor line short circuit ($R_{PTC} < 20 \Omega$) - loss of supply <p>The contact close if:</p> <ul style="list-style-type: none"> - temperature within limits - $R_{PTC} > (1.0...1.5)k\Omega$ on power-up - $(1...1.5)k\Omega$ on cooling <p>In BX mode (BF 0.5s or BL 3s) RESET work on falling front of the signal.</p> <p>In DX mode (DF 0.5s or DL 3s) RESET work on rising front of the signal.</p> <p>RESET signal must be $>1s$.</p> <p>* PTC-Break ** PTC-Short circuit *** RESET MEMORY = Operate the RESET key, or interrupt the supply.</p>

Functions

Output relay On (NO closed) when all OK: positive logic.

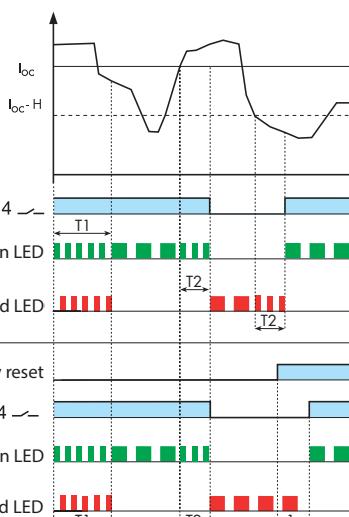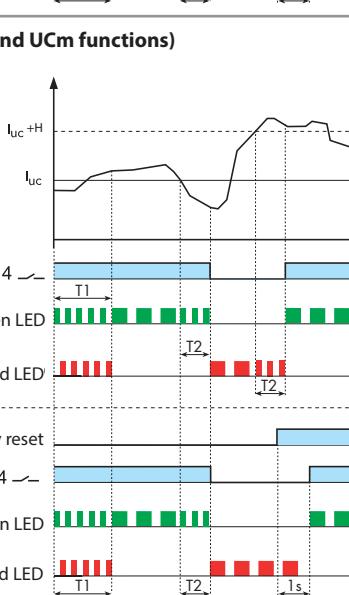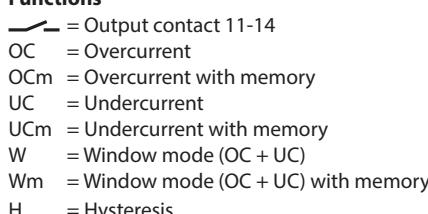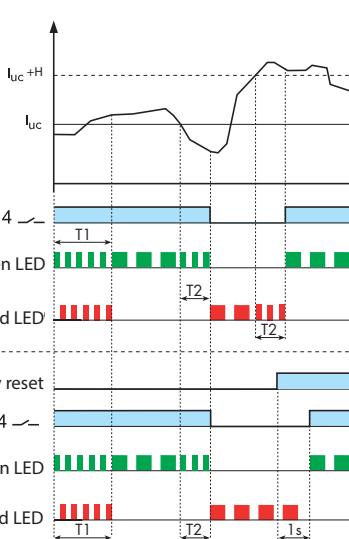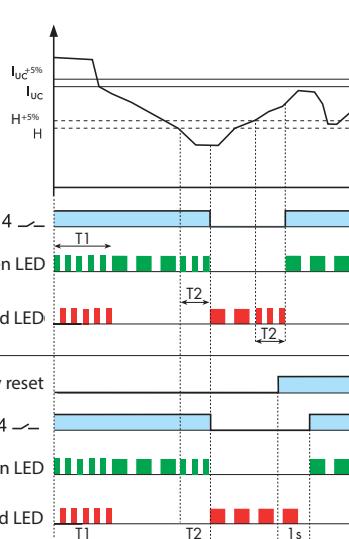Type 70.51	Overcurrent (OC and OCm functions)	Functions
	Without memory  With memory 	 <p>If the current moves out of limits, following delay T2 the output relay turns Off.</p> <p>When the current is again within limits the Switch-on hysteresis H:</p> <ul style="list-style-type: none"> - if set in the "without memory" position, the output relay "recovers", i.e. it turns On (after the Switch-on lock-out time) without any memory of the previous event; - if set in the "with memory" position the output relay remains open.
	Undercurrent (UC and UCm functions)  With memory 	<p>To reset, it is necessary to switch the supply Off and then On again, or to push button connected on RESET terminals.</p> <p>During T1 delay the relay don't monitoring.</p>
	Window Mode (Overcurrent + Undercurrent, W and Wm functions)  With memory 	

Front view: function selector and regulators
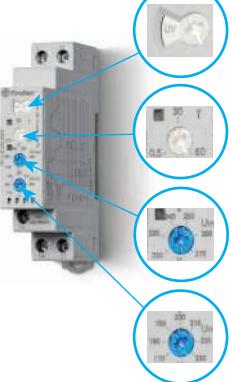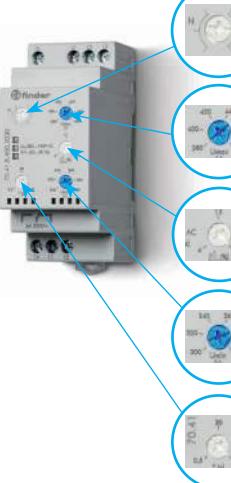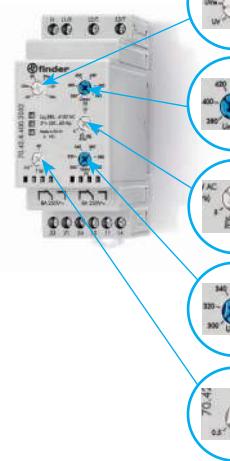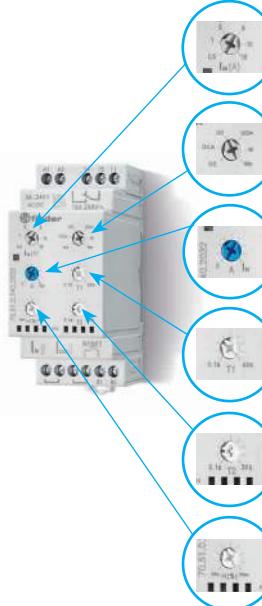
<p>70.11</p>  <p>Functions: OV, OVm, UV, UVM, W, Wm</p> <p>T_{off} delay: (0.5...60)sec</p> <p>U_{Max}: (220...270)V</p> <p>U_{Min}: (170...230)V</p>	<p>70.31</p>  <p>Functions: OV, OVm, UV, UVM, W, Wm</p> <p>U_{Max}: (380...480)V</p> <p>U_{Min}: (300...400)V</p> <p>T_{off} delay: (0.5...60) sec</p>	<p>70.41</p>  <p>N= With N-line monitoring Δ= Without N-line monitoring</p> <p>U_{Max}: (380...480)V</p> <p>$(4...25)\% U_N$</p> <p>U_{Min}: (300...400)V</p> <p>T_{off} delay: (0.5...60)sec</p>
<p>70.42</p>  <p>Functions: OV, OVm, UV, UVM, W, Wm</p> <p>U_{Max}: (380...480)V</p> <p>$(5...25)\% U_N$</p> <p>U_{Min}: (300...400)V</p> <p>T_{off} delay: (0.5...60)sec</p>		
<p>70.51</p>  <p>Detection levels I_M: (0.5, 1, 2, 5, 10, 16) A</p> <p>Functions: OC, OCm, UC, UCm, W, Wm</p> <p>Current value (0...I_M)</p> <p>Switch on lock out time (0.1...40 sec)</p> <p>Switch OFF Delay (0.1...30 sec)</p> <p>Hysteresys 5...50% 1...99% in Window Mode</p>		


LED indication

Monitoring relays Type	LED	Supply system normal	Supply system abnormal (Voltage out of limits, switch-off delay time T running)	Supply system abnormal (Reason for switch-off, RESET necessary when "with Memory"** is selected)
		Contact 11 - 14 closed	Contact 11 - 14 closed	Contact 11-14 open
70.11.8.230.2022	•			Overvoltage OV and OVm Undervoltage UV and UVm With Memory, following a failure a manual "RESET" ** is necessary
70.31.8.400.2022	•			Overvoltage OV and OVm Undervoltage UV and UVm Phase loss Phase rotation With Memory, following a failure a manual "RESET" ** is necessary
70.41.8.400.2030	• ○ •			Overvoltage OV Undervoltage UV Asymmetry Phase loss Neutral loss Phase rotation
70.42.8.400.2032	• ○ •			Overvoltage OV and OVm Undervoltage UV and UVm Asymmetry Phase loss Neutral loss Phase rotation With Memory, following a failure a manual "RESET" ** is necessary
70.51.0.240.x032	• •		or (during T2 time) (during T1 time)	or (during T2 time)
70.61.8.400.x000	•			Phase rotation or Phase loss
70.62.8.400.0000	•			Phase loss Phase rotation


* The function "with Memory" is only available for type 70.11, 70.31, 70.42 and 70.51.

** It is necessary to switch the supply OFF and then On again (U off U on) or to rotate the function selector first to an adjacent position and then to the original position.


Wiring diagrams

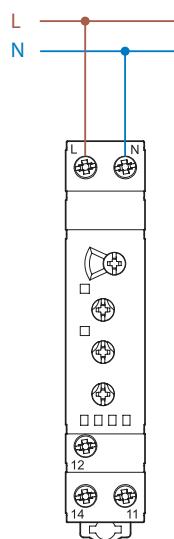


Type 70.11

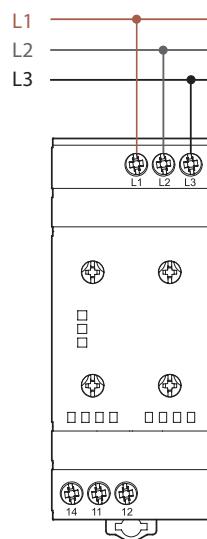


Type 70.31

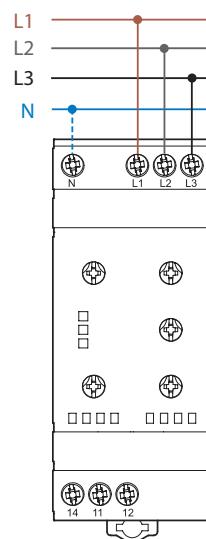


Type 70.41

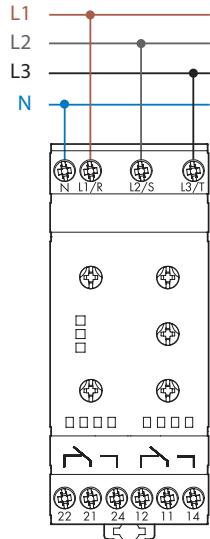


Type 70.42

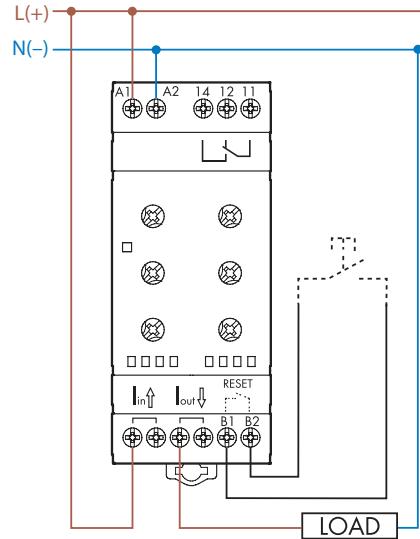


Type 70.51 and 70.51 NFC

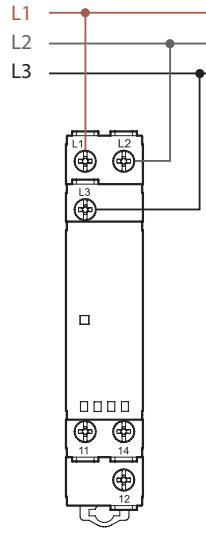

Type 70.61

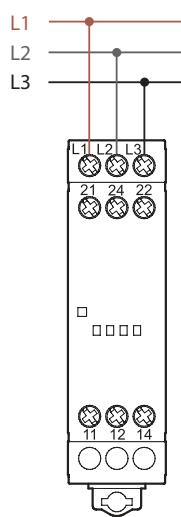


Type 70.62

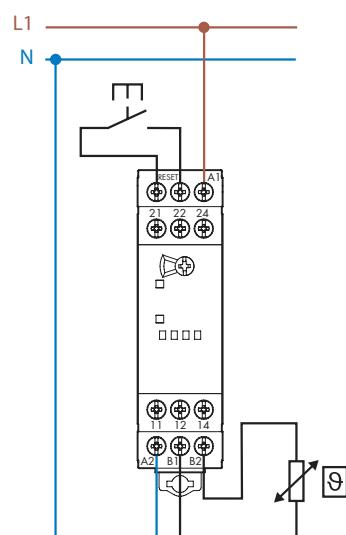

Type 70.92


Application example

The output contact switches the coil of the line contactor.

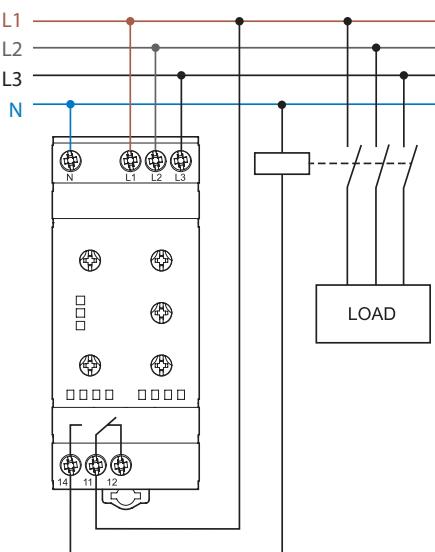


Outline drawings


Type 70.11
Screw terminal

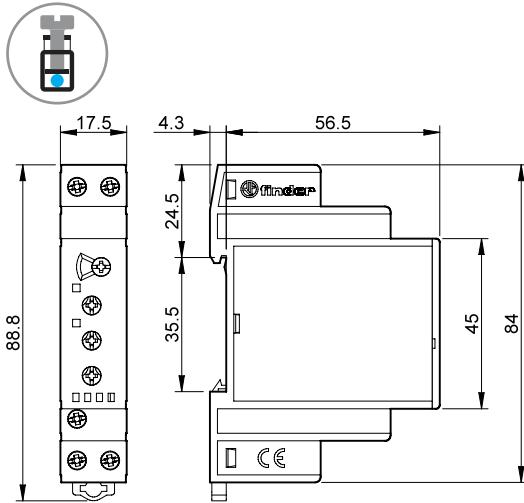


Type 70.31
Screw terminal

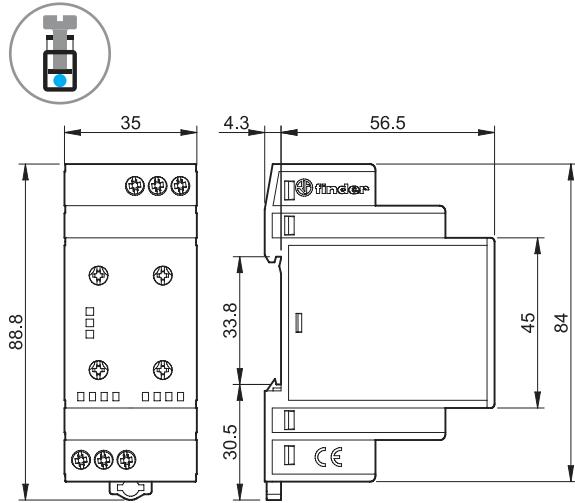


E Type 70.41
Screw terminal

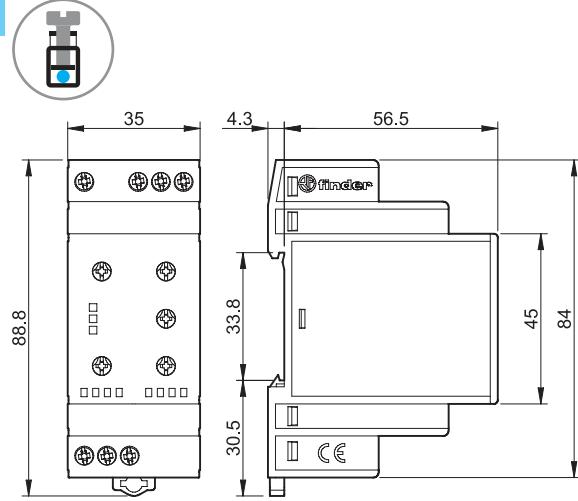


Type 70.42
Screw terminal

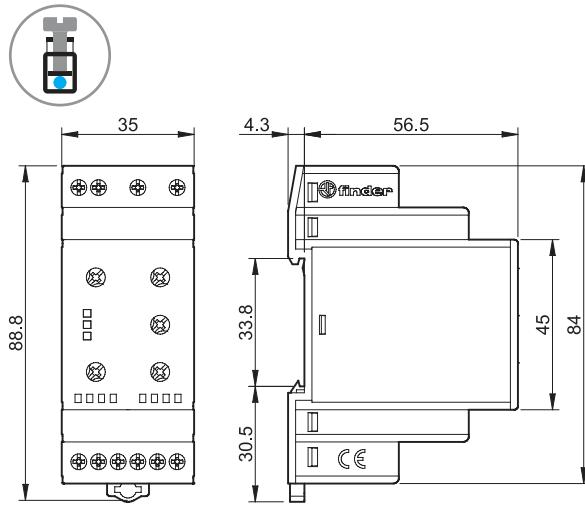

Type 70.51.0.240.2032
Screw terminal

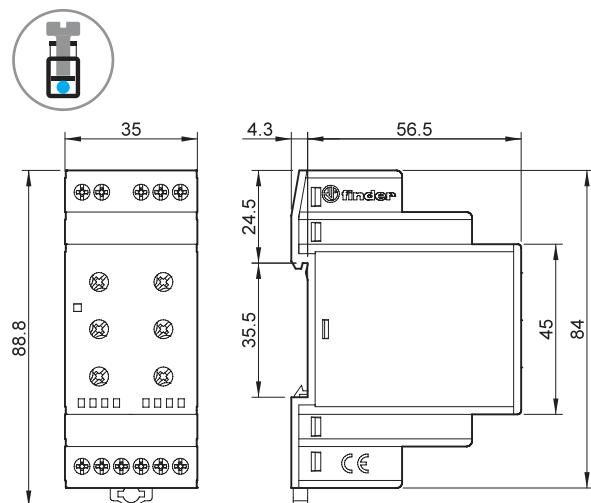


Type 70.51.0.240.N032
Screw terminal

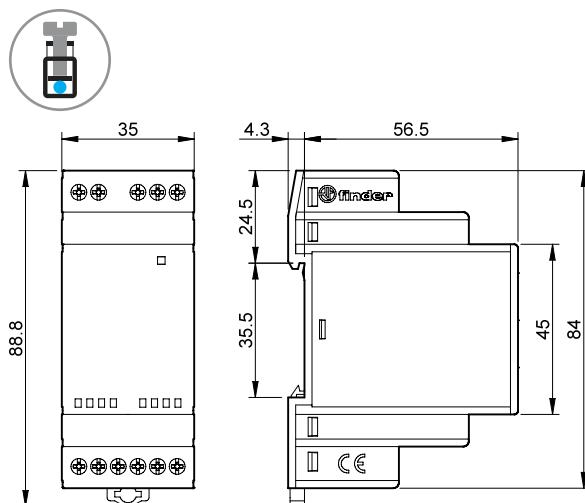


Outline drawings


Type 70.61
Screw terminal

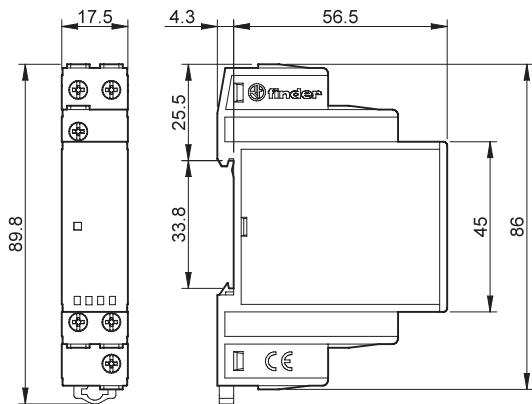


Type 70.61-P000
Push-in terminal

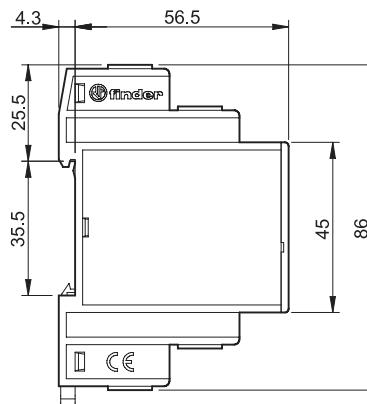

Type 70.62
Screw terminal

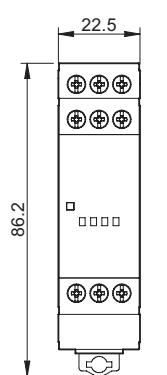

Type 70.92
Screw terminal

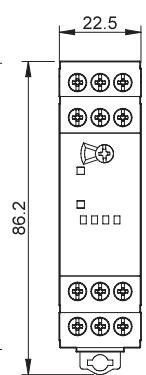


Accessories



020.01

Adaptor for panel mounting, plastic, 17.5 mm wide for 70.11, 70.61 and 70.92



020.01

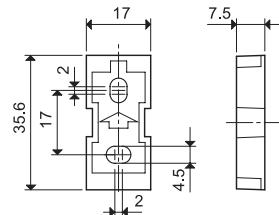

011.01

Adaptor for panel mounting, plastic, 35 mm wide for 70.31, 70.41, 70.42 and 70.51

011.01

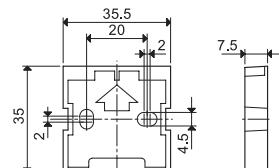

060.48

Sheet of marker tags (CEMBRE Thermal transfer printers) for relays types 70.11, 70.31, 70.41, 70.42, 70.51, 70.62 and 70.92 (48 tags), 6 x 12 mm

060.48



022.09

Separator for rail mounting, plastic, 9 mm wide

022.09

