# Coaxial **Bandpass Filter**

1530 to 1620 MHz 50Ω

# **The Big Deal**

- Low Insertion Loss (2.0 dB typical)
- · Good close-in rejection
- Versatile small size, coaxial, 1.43" length

# VBF-1575+



CASE STYLE: FF704

## **Product Overview**

The VBF-1575+ Band Pass Filter is constructed using internal LTCC Band Pass Filter structure to achieve repeatable performance. Covering 1575 MHz ± 45 MHz, these units offer low insertion loss and good rejection at the band reject edges. Built using Mini-Circuits proven unibody construction which integrates the RF connectors with the case body, the VBF-1575+ takes very little space and meets rugged test lab system environment.

## **Key Features**

Feature	Advantages
Good Rejection close to pass band	Provides good rejection of signals close to the pass band, for improved system performance.
Compact Versatile Case (1.43"x0.41")	Enables use in a variety of applications including space constrained connectorized systems. Connectors: SMA Female (1), SMA Male (1)
Rugged Unibody Construction	Mini-Circuits Unibody construction allows survivability in critical applications including milita- rized or industrial systems.

- Notes
- A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



# Coaxial Bandpass Filter


### 50Ω 1530 to 1620 MHz

#### **Maximum Ratings**

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	1.5W max. at 25°C
*Passband rating, derate linearly to 0.	25W at 100°C ambient

\*Passband rating, derate linearly to 0.25W at 100°C ambient Permanent damage may occur if any of these limits are exceeded.

#### **Outline Drawing**

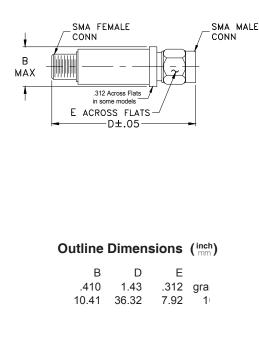

#### Features

- Small size
- Temperature stable
- Rugged unibody construction

#### Applications

- Harmonic Rejection
- Transmitters / Receivers




CASE STYLE: FF704

Connectors Model SMA VBF-1575+


+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

#### Electrical Specifications at 25°C

Para	neter	F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Center Frequency	_	—	_	1575	_	MHz
Pass Band	Insertion Loss	F1-F2	1530-1620	_	_	3.0	dB
	VSWR	F1-F2	1530-1620	-	-	2.5	:1
	Insertion Loss	DC-F3	DC-1200	_	20	_	dB
Stop Band, Lower	VSWR	DC-F3	DC-1200	-	25	—	:1
Cten Bend Unner	Insertion Loss	F4-F5	2800-5200	_	25	_	dB
Stop Band, Upper	VSWR	F4-F5	2800-5200	-	20	—	:1



#### **Functional Schematic**



#### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)		
0.30	66.27	2309.62		
300.00	36.19	116.96		
900.00	36.42	71.69		
1050.00	38.82	59.41		
1150.00	46.97	48.27		
1280.00	22.49	26.70		
1405.00	7.30	4.82		
1480.00	2.76	1.65		
1530.00	2.47	1.88		
2220.00	20.01	54.29		
2400.00	23.53	65.60		
2800.00	30.79	75.11		
3100.00	37.82	72.94		
3500.00	49.66	65.41		
5200.00	29.49	26.75		

10000

100


1

0

VSWR

3100

2690



A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

1460

60

40

20

0

1050

INSERTION LOSS (dB)



1870 2280 FREQUENCY (MHz)

> REV. C M151107 VBF-1575+ AD/CP/AM 151020 Page 2 of 2

5000

#### www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

VBF-1575+

INSERTION LOSS

n 15 Pa

3000

FREQUENCY (MHz)

4000

VBF-1575+

VSWR

3.0

1000

2000

1530 1560 1590 1620