REVISION C

DESIGNED & DIMENSIONED IN MILLIMETERS[INCHES]

DO NOT SCALE FROM THIS PRINT

PTT-1XX-01-X-S-XXX

- No OF POSITIONS: -02 THRU -50 (PER ROW)
- LEAD STYLE: -01
- PLATING SPECIFICATION:
  - -S: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S47-XX-S)
  - -L: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (USE T-1S47-XX-L)
- ROW SPECIFICATION: -S: SINGLE
- POLARIZATION OPTION: -XXX INDICATES POSITION TO BE OMITTED

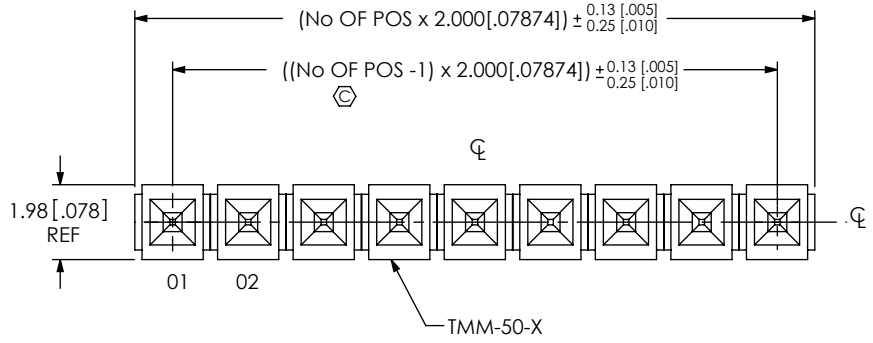

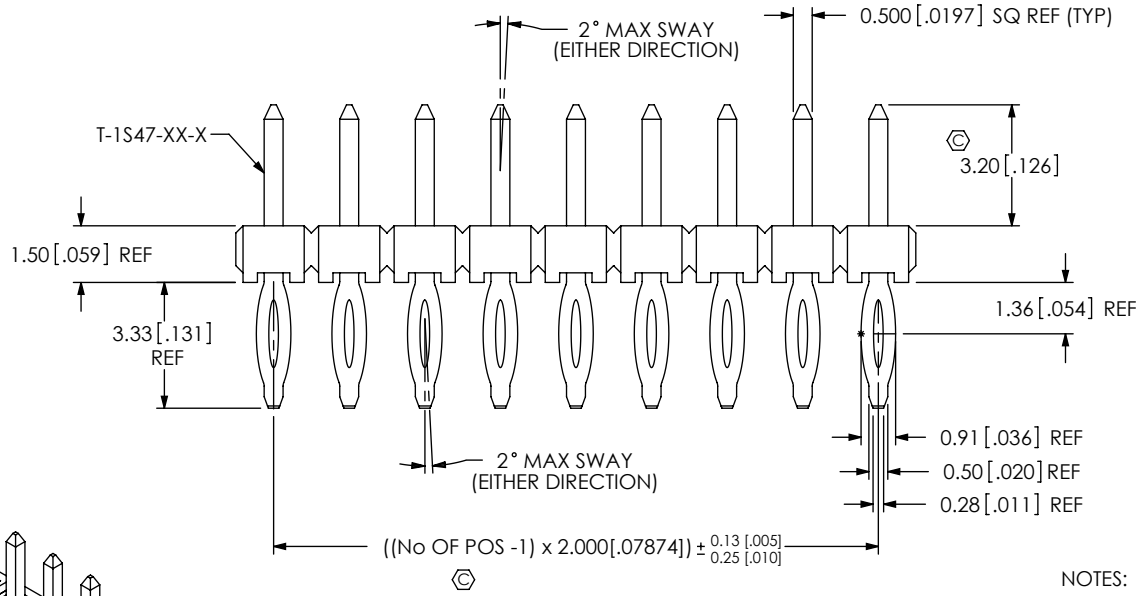

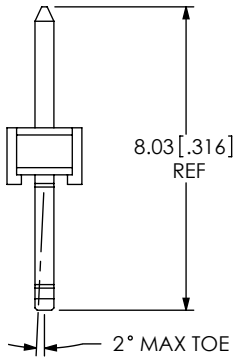

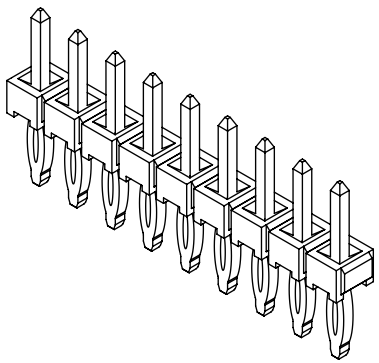

FIG 1
PTT-110-01-X-S SHOWN

NOTES:

1. Ⓒ REPRESENTS A CRITICAL DIMENSION.
2. MAXIMUM CUT FLASH: 0.38 [.015].
3. MINIMUM PUSHOUT FORCE: 1.0 LB PER PIN.
4. PARTS TO BE BULK PACKAGED.
5. MAX ALLOWABLE BOW 0.04 MM/MM.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:
DECIMALS: X.X: ±0.3 [.01]; X.XX: ±0.13 [.005]; X.XXX: ±0.051 [.0020]
ANGLES: 2 °

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

MATERIAL: INSULATOR: VECTRA LCP, COLOR: BLACK
TERMINAL: PHOS BRONZE

DO NOT SCALE DRAWING SHEET SCALE: 2:1

DESCRIPTION: 2MM PRESS FIT TERMINAL STRIP

DWG. NO. PTT-1XX-01-X-S-XXX

BY: ROY LUO 1/4/2011 SHEET 1 OF 1

c:\enterprisevault\DWG\MISC\MKTG\PTT-1XX-01-X-S-XXX-MKT.SLDDRW