
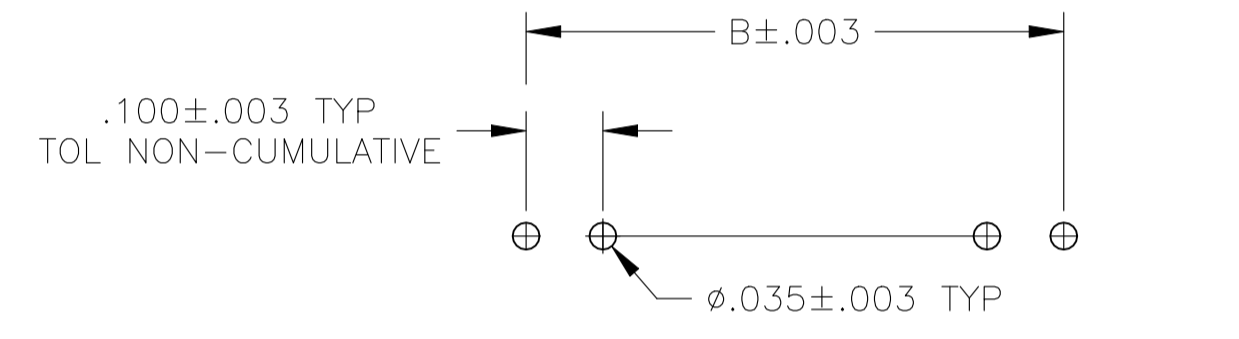


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
H5	REVISED PER	ECN-22-166059	25JUL2022	RK	MF

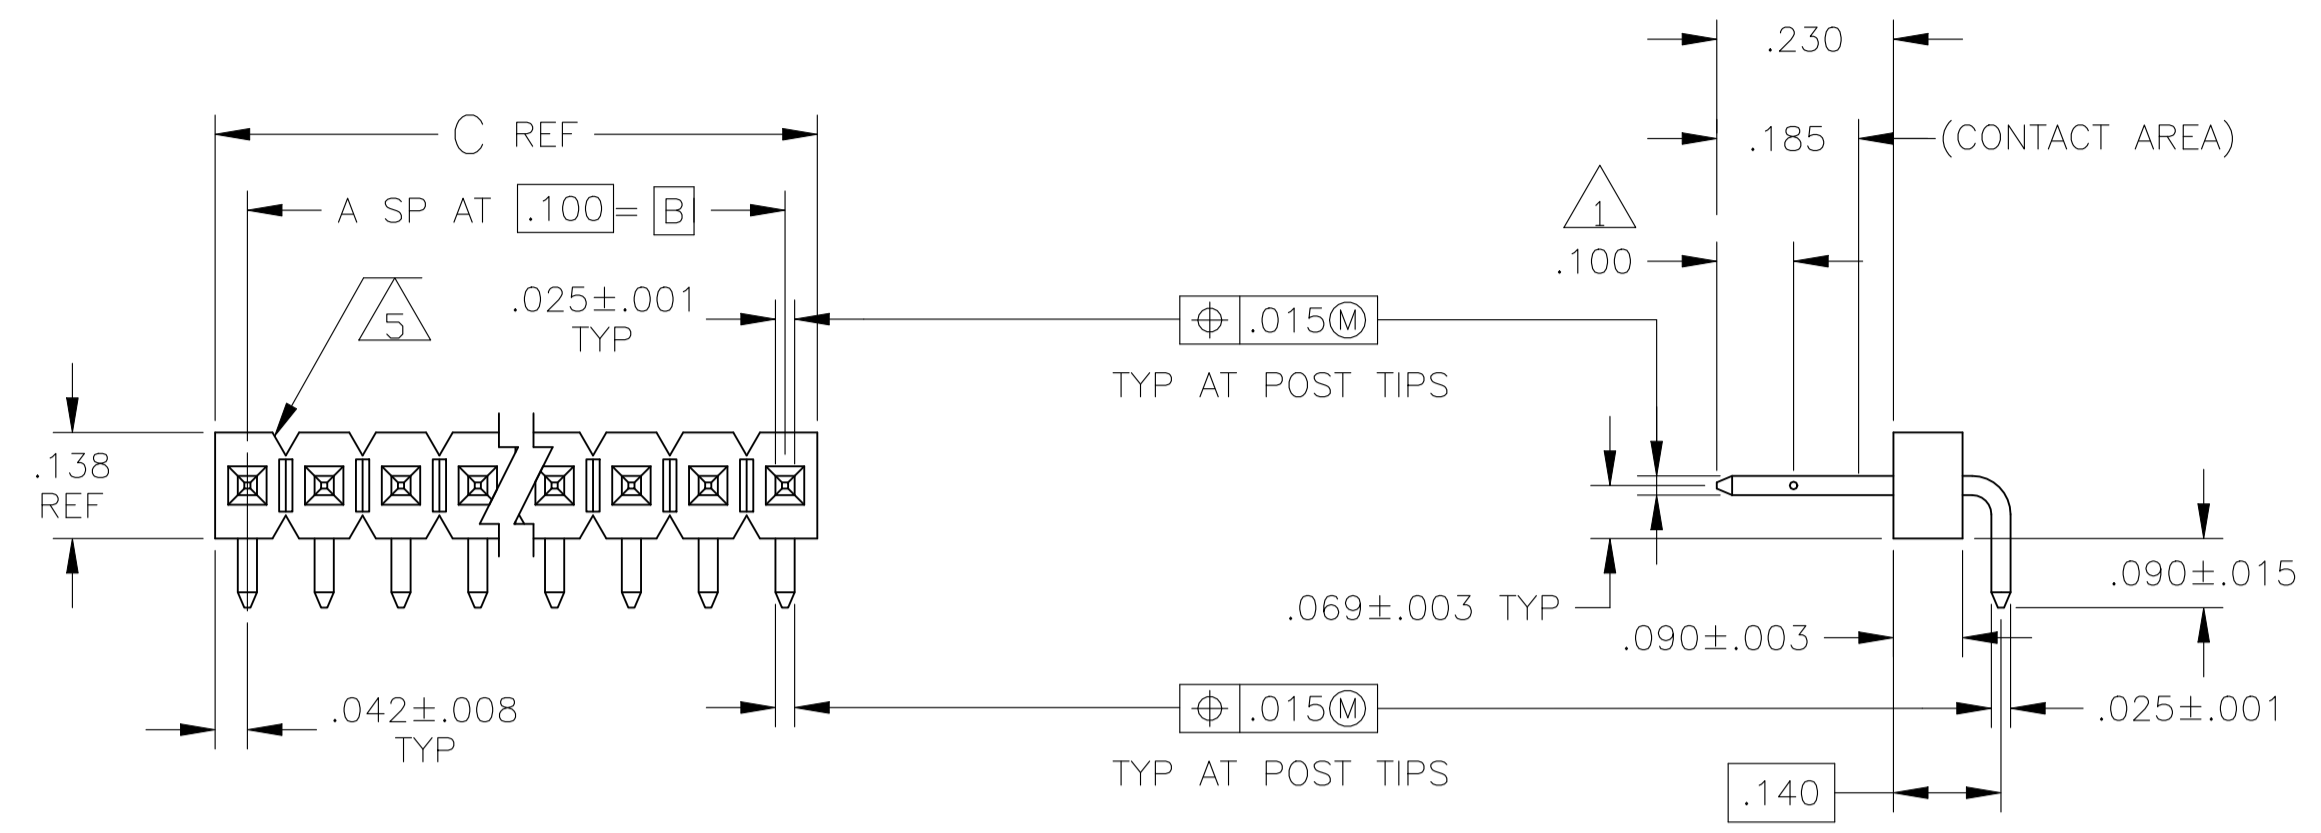

RECOMMENDED HOLE LAYOUT

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 3 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 4 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 5 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 6 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△	△	3.984	3.900	39	40	9-103765-0
△	△	3.484	3.400	34	35	8 - -5
△	△	2.984	2.900	29	30	8 - -0
△	△	2.484	2.400	24	25	7 - -5
△	△	1.984	1.900	19	20	7 - -0
△	△	1.484	1.400	14	15	6 - -5
△	△	1.384	1.300	13	14	6 - -4
△	△	1.284	1.200	12	13	6 - -3
△	△	1.184	1.100	11	12	6 - -2
△	△	1.084	1.000	10	11	6 - -1
△	△	.984	.900	9	10	6 - -0
△	△	.884	.800	8	9	5 - -9
△	△	.784	.700	7	8	5 - -8
△	△	.684	.600	6	7	5 - -7
△	△	.584	.500	5	6	5 - -6
△	△	.484	.400	4	5	5 - -5
△	△	.384	.300	3	4	5 - -4
△	△	.284	.200	2	3	5 - -3
△	△	.184	.100	1	2	5 - -2
△	△	.084			1	5-103765-1
△	△	3.984	3.900	39	40	4-103765-0
△	△	3.884	3.800	38	39	3 - -9
△	△	3.784	3.700	37	38	3 - -8
△	△	3.684	3.600	36	37	3 - -7
△	△	3.584	3.500	35	36	3 - -6
△	△	3.484	3.400	34	35	3 - -5
△	△	3.284	3.300	33	34	3 - -4
△	△	3.284	3.200	32	33	3 - -3
△	△	3.184	3.100	31	32	3 - -2
△	△	3.084	3.000	30	31	3 - -1
△	△	2.984	2.900	29	30	3 - -0
△	△	2.884	2.800	28	29	2 - -9
△	△	2.784	2.700	27	28	2 - -8
△	△	2.684	2.600	26	27	2 - -7
△	△	2.584	2.500	25	26	2 - -6
△	△	2.484	2.400	24	25	2 - -5
△	△	2.384	2.300	23	24	2 - -4
△	△	2.284	2.200	22	23	2 - -3
△	△	2.184	2.100	21	22	2 - -2
△	△	2.084	2.000	20	21	2 - -1
△	△	1.984	1.900	19	20	2 - -0
△	△	1.884	1.800	18	19	1 - -9
△	△	1.784	1.700	17	18	1 - -8
△	△	1.684	1.600	16	17	1 - -7
△	△	1.584	1.500	15	16	1 - -6
△	△	1.484	1.400	14	15	1 - -5
△	△	1.384	1.300	13	14	1 - -4
△	△	1.284	1.200	12	13	1 - -3
△	△	1.184	1.100	11	12	1 - -2
△	△	1.084	1.000	10	11	1 - -1
△	△	.984	.900	9	10	1 - -0
△	△	.884	.800	8	9	1 - -9
△	△	.784	.700	7	8	1 - -8
△	△	.684	.600	6	7	1 - -7
△	△	.584	.500	5	6	1 - -6
△	△	.484	.400	4	5	1 - -5
△	△	.384	.300	3	4	1 - -4
△	△	.284	.200	2	3	1 - -3
△	△	.184	.100	1	2	1 - -2
△	△	.084			1	103765-1

REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN L. D. RINGLEY 24JUL85
CHK R. FLICKER 24JUL85

APVD R. FLICKER 24JUL85

NAME ASSY. MOD II. HEADER, BREAKAWAY, SR, RIGHT ANGLE 100. , WITH .025 SQUARE POSTS

PRODUCT SPEC

APPLICATION SPEC

SIZE A1 CAGE CODE 00779 DRAWING NO. 103765

RESTRICTED TO

MATERIAL HOUSING: TARE REMOVED THERMOPLASTIC COLOR: BLACK POSTS: COPPER ALLOY FINISH SEE TABLE WEIGHT --

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV H5