

# TPIC1502 QUAD AND HEX POWER DMOS ARRAY


SLIS054 – OCTOBER 1996

- **Low  $r_{DS(on)}$ :**  
0.25  $\Omega$  Typ (Full H-Bridge)  
0.4  $\Omega$  Typ (Triple Half H-Bridge)
- **Pulsed Current . . . 4 A Per Channel**
- **Matched Sense Transistors for Class A-B Linear Operation**
- **Fast Commutation Speed**


## description

The TPIC1502 is a monolithic power DMOS array that consists of ten electrically isolated N-channel enhancement-mode power DMOS transistors, four of which are configured as a full H-bridge and six as a triple half H-bridge. The lower stage of the full H-bridge is provided with an integrated sense-FET to allow biasing of the bridge in class A-B operation.

The TPIC1502 is offered in a 24-pin wide-body surface-mount (DW) package and is characterized for operation over the case temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

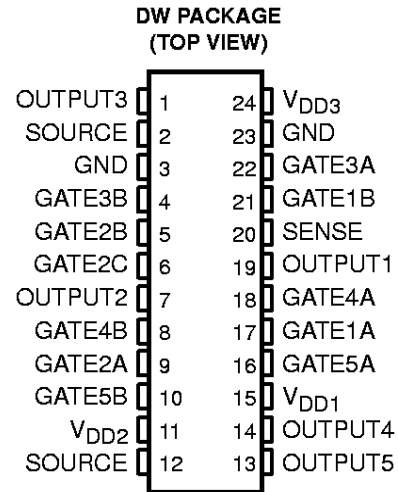

## schematic

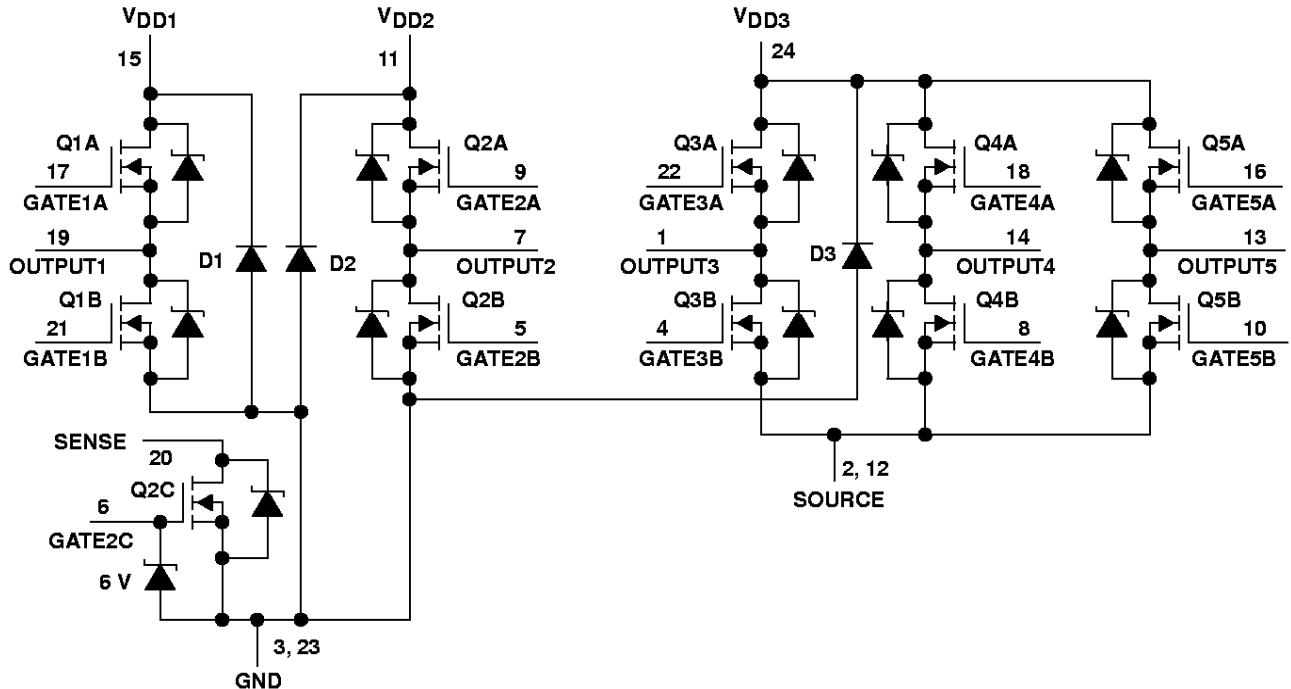

- NOTES: A. Terminals 3 and 23 must be externally connected.  
B. Terminals 2 and 12 must be externally connected.  
C. No output may be taken greater than 0.5 V below GND.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1996, Texas Instruments Incorporated

# TPIC1502

## QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

### absolute maximum ratings, $T_C = 25^\circ\text{C}$ (unless otherwise noted)†

|   |  |
|---|--|
| Supply-to-GND voltage   | 20 V                                       |
| Source-to-GND voltage (Q3A, Q4A, Q5A)   | 20 V                                       |
| Output-to-GND voltage   | 20 V                                       |
| Sense-to-GND voltage  | 20 V                                       |
| Gate-to-source voltage range, $V_{GS}$ (Q1A, Q1B, Q2A, Q2B, Q3A, Q3B, Q4A, Q4B, Q5A, Q5B)                 | $\pm 20$ V                                 |
| Gate-to-source voltage, $V_{GS}$ (Q2C)  | -0.7 V to 6 V                              |
| Continuous gate-to-source zener-diode current (Q2C)   | $\pm 10$ mA                                |
| Pulsed gate-to-source zener-diode current (Q2C)   | $\pm 50$ mA                                |
| Continuous drain current, each output (Q1A, Q1B, Q2A, Q2B)  | 1.5 A                                      |
| Continuous drain current, each output (Q3A, Q3B, Q4A, Q4B, Q5A, Q5B)                                      | 1.5 A                                      |
| Continuous drain current (Q2C)  | 5 mA                                       |
| Continuous source-to-drain diode current (Q1A, Q1B, Q2A, Q2B)   | 1.5 A                                      |
| Continuous source-to-drain diode current (Q3A, Q3B, Q4A, Q4B, Q5A, Q5B)                                   | 1.5 A                                      |
| Continuous source-to-drain diode current (Q2C)  | 5 mA                                       |
| Pulsed drain current, each output, $I_{max}$ (Q1A, Q1B, Q2A, Q2B) (see Note 1 and Figure 24)              | 4 A  |
| Pulsed drain current, each output, $I_{max}$ (Q3A, Q3B, Q4A, Q4B, Q5A, Q5B)<br>(see Note 1 and Figure 25) | 4 A  |
| Pulsed drain current, each output, $I_{max}$ (Q2C) (see Note 1)   | 20 mA                                      |
| Continuous total power dissipation, $T_C = 70^\circ\text{C}$ (see Note 2 and Figures 24 and 25)           | 2.86 W                                     |
| Operating virtual junction temperature range, $T_J$   | $-40^\circ\text{C}$ to $150^\circ\text{C}$ |
| Operating case temperature range, $T_C$   | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |
| Storage temperature range, $T_{stg}$  | $-65^\circ\text{C}$ to $150^\circ\text{C}$ |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds  | $260^\circ\text{C}$                        |

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. Pulse duration = 10 ms, duty cycle = 2%

2. Package mounted in intimate contact with infinite heat sink.



**electrical characteristics, Q1A, Q1B, Q2A, Q2B,  $T_C = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER         |  | TEST CONDITIONS   | MIN                       | TYP   | MAX  | UNIT          |
|-------------------|--|---|---------------------------|-------|------|---------------|
| $V_{(BR)DSX}$     | Drain-to-source breakdown voltage  | $I_D = 250 \mu\text{A}$ , $V_{GS} = 0$  | 20                        |       |      | V             |
| $V_{GS(th)}$      | Gate-to-source threshold voltage   | $I_D = 1 \text{ mA}$ ,<br>See Figure 5  | 1.5                       | 1.85  | 2.2  | V             |
| $V_{GS(th)match}$ | Gate-to-source threshold voltage matching  | $I_D = 1 \text{ mA}$ , $V_{DS} = V_{GS}$  |                           |       | 40   | mV            |
| $V_{(BR)}$        | Reverse drain-to-GND breakdown voltage   | Drain-to-GND current = $250 \mu\text{A}$<br>(D1, D2)                                      | 20                        |       |      | V             |
| $V_{(BR)GS}$      | Gate-to-source breakdown voltage, Q2C  | $I_{GS} = 100 \mu\text{A}$  | 6                         |       |      | V             |
| $V_{(BR)SG}$      | Source-to-gate breakdown voltage, Q2C  | $I_{GS} = 100 \mu\text{A}$  | 0.7                       |       |      | V             |
| $V_{(DS)on}$      | Drain-to-source on-state voltage   | $I_D = 1.5 \text{ A}$ , $V_{GS} = 10 \text{ V}$ ,<br>See Notes 3 and 4                    |                           | 0.375 | 0.45 | V             |
| $V_F$             | Forward on-state voltage, GND-to- $V_{DD1}$ ,<br>GND-to- $V_{DD2}$               | $I_D = 1.5 \text{ A}$ (D1, D2)<br>See Notes 3 and 4                                       |                           | 1.5   |      | V             |
| $V_F(SD)$         | Forward on-state voltage, source-to-drain  | $I_S = 1.5 \text{ A}$ , $V_{GS} = 0$ ,<br>See Notes 3 and 4 and Figure 19                 |                           | 0.93  | 1.2  | V             |
| $I_{DSS}$         | Zero-gate-voltage drain current  | $V_{DS} = 16 \text{ V}$ ,<br>$V_{GS} = 0$   | $T_C = 25^\circ\text{C}$  | 0.05  | 1    | $\mu\text{A}$ |
|                   |  |   | $T_C = 125^\circ\text{C}$ | 0.5   | 10   |               |
| $I_{GSSF}$        | Forward gate current, drain short-circuited<br>to source                         | $V_{GS} = 16 \text{ V}$ , $V_{DS} = 0$  |                           | 10    | 100  | nA            |
| $I_{GSSR}$        | Reverse gate current, drain short-circuited<br>to source                         | $V_{SG} = 16 \text{ V}$ , $V_{DS} = 0$  |                           | 10    | 100  | nA            |
| $I_{lkg}$         | Leakage current, $V_{DD1}$ -to-GND,<br>$V_{DD2}$ -to-GND, gate shorted to source | $V_{DGND} = 16 \text{ V}$   | $T_C = 25^\circ\text{C}$  | 0.05  | 1    | $\mu\text{A}$ |
|                   |  |   | $T_C = 125^\circ\text{C}$ | 0.5   | 10   |               |
| $r_{DS(on)}$      | Static drain-to-source on-state resistance                                       | $V_{GS} = 10 \text{ V}$ ,<br>$I_D = 1.5 \text{ A}$ ,<br>See Notes 3 and 4<br>and Figure 9 | $T_C = 25^\circ\text{C}$  | 0.25  | 0.3  | $\Omega$      |
|                   |  |   | $T_C = 125^\circ\text{C}$ | 0.38  | 0.51 |               |
| $g_{fs}$          | Forward transconductance   | $V_{DS} = 14 \text{ V}$ , $I_D = 750 \text{ mA}$ ,<br>See Notes 3 and 4 and Figure 13     | 0.75                      | 1.2   |      | S             |
| $C_{iss}$         | Short-circuit input capacitance, common<br>source                                | $V_{DS} = 14 \text{ V}$ ,<br>$f = 1 \text{ MHz}$ ,<br>$V_{GS} = 0$ ,<br>See Figure 17     |                           | 98    |      | pF            |
| $C_{oss}$         | Short-circuit output capacitance, common<br>source                               |   |                           | 70    |      |               |
| $C_{rss}$         | Short-circuit reverse transfer capacitance,<br>common source                     |   |                           | 54    |      |               |
| $\alpha_s$        | Sense-FET drain current ratio  | $V_{DS} = 6 \text{ V}$ , $I_D(Q2B) = 1.5 \text{ mA}$                                      | 100                       | 150   | 200  |               |

NOTES: 3. Technique should limit  $T_J - T_C$  to  $10^\circ\text{C}$  maximum.

4. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts.

**source-to-drain diode characteristics, Q1A, Q2A,  $T_C = 25^\circ\text{C}$**

| PARAMETER |                       | TEST CONDITIONS   | MIN | TYP | MAX | UNIT |
|-----------|-----------------------|---|-----|-----|-----|------|
| $t_{rr}$  | Reverse-recovery time | $I_S = 750 \text{ mA}$ , $V_{GS} = 0$ ,<br>$V_{DS} = 14 \text{ V}$ ,<br>$di/dt = 100 \text{ A}/\mu\text{s}$ , |     | 18  |     | ns   |
| $Q_{RR}$  | Total diode charge    | See Figures 1 and 23  |     | 14  |     | nC   |

# TPIC1502

## QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

### resistive-load switching characteristics, Q1A, Q1B, Q2A, Q2B, $T_C = 25^\circ\text{C}$

| PARAMETER                                    | TEST CONDITIONS  | MIN | TYP  | MAX | UNIT     |
|--|--|-----|------|-----|----------|
| $t_{d(on)}$ Turn-on delay time               | $V_{DD} = 14\text{ V}$ , $R_L = 18.7\ \Omega$ , $t_{en} = 10\text{ ns}$ ,<br>$t_{dis} = 10\text{ ns}$ , See Figure 3 |     | 12   |     | ns       |
| $t_{d(off)}$ Turn-off delay time             |  |     | 13   |     |          |
| $t_r$ Rise time                              |  |     | 2.2  |     |          |
| $t_f$ Fall time                              |  |     | 6    |     |          |
| $Q_g$ Total gate charge                      | $V_{DS} = 14\text{ V}$ , $I_D = 750\text{ mA}$ , $V_{GS} = 10\text{ V}$ ,<br>See Figure 4 and Figure 21              |     | 1.7  | 2.1 | nC       |
| $Q_{gs(th)}$ Threshold gate-to-source charge |  |     | 0.3  | 0.4 |          |
| $Q_{gd}$ Gate-to-drain charge                |  |     | 0.4  | 0.5 |          |
| $L_D$ Internal drain inductance              |  |     | 7    |     | nH       |
| $L_S$ Internal source inductance             |  |     | 7    |     |          |
| $R_g$ Internal gate resistance               |  |     | 0.25 |     | $\Omega$ |

### electrical characteristics, Q3A, Q3B, Q4A, Q4B, Q5A, Q5B, $T_C = 25^\circ\text{C}$ (unless otherwise noted)

| PARAMETER  | TEST CONDITIONS   | MIN                       | TYP  | MAX  | UNIT          |
|--|---|---------------------------|------|------|---------------|
| $V_{(BR)DSX}$ Drain-to-source breakdown voltage                      | $I_D = 250\ \mu\text{A}$ , $V_{GS} = 0$   | 20                        |      |      | V             |
| $V_{GS(th)}$ Gate-to-source threshold voltage                        | $I_D = 1\text{ mA}$ ,<br>See Figure 6 $V_{DS} = V_{GS}$                               | 1.5                       | 1.85 | 2.2  | V             |
| $V_{(BR)}$ Reverse drain-to-GND breakdown voltage                    | Drain-to-GND current = $250\ \mu\text{A}$ (D3)  | 20                        |      |      | V             |
| $V_{(DS)on}$ Drain-to-source on-state voltage                        | $I_D = 1.5\text{ A}$ , $V_{GS} = 10\text{ V}$ ,<br>See Notes 3 and 4                  |                           | 0.6  | 0.75 | V             |
| $V_F$ Forward on-state voltage, GND-to- $V_{DD3}$                    | $I_D = 1.5\text{ A}$ (D3), See Notes 3 and 4  |                           | 1.5  |      | V             |
| $V_{F(SD)}$ Forward on-state voltage, source-to-drain                | $I_S = 1.5\text{ A}$ , $V_{GS} = 0$ ,<br>See Notes 3 and 4 and Figure 20              |                           | 1    | 1.2  | V             |
| $I_{DSS}$ Zero-gate-voltage drain current                            | $V_{DS} = 16\text{ V}$ ,<br>$V_{GS} = 0$  | $T_C = 25^\circ\text{C}$  | 0.05 | 1    | $\mu\text{A}$ |
|  |   | $T_C = 125^\circ\text{C}$ | 0.5  | 10   |               |
| $I_{GSSF}$ Forward gate current, drain short-circuited to source     | $V_{GS} = 16\text{ V}$ , $V_{DS} = 0$   |                           | 10   | 100  | nA            |
| $I_{GSSR}$ Reverse gate current, drain short-circuited to source     | $V_{SG} = 16\text{ V}$ , $V_{DS} = 0$   |                           | 10   | 100  | nA            |
| $I_{lkg}$ Leakage current, $V_{DD3}$ -to-GND, gate shorted to source | $V_{DGND} = 16\text{ V}$  | $T_C = 25^\circ\text{C}$  | 0.05 | 1    | $\mu\text{A}$ |
|  |   | $T_C = 125^\circ\text{C}$ | 0.5  | 10   |               |
| $r_{DS(on)}$ Static drain-to-source on-state resistance              | $V_{GS} = 10\text{ V}$ ,<br>$I_D = 1.5\text{ A}$ ,<br>See Notes 3 and 4 and Figure 10 | $T_C = 25^\circ\text{C}$  | 0.4  | 0.5  | $\Omega$      |
|  |   | $T_C = 125^\circ\text{C}$ | 0.61 | 0.85 |               |
| $g_{fs}$ Forward transconductance                                    | $V_{DS} = 14\text{ V}$ , $I_D = 750\text{ mA}$ ,<br>See Notes 3 and 4 and Figure 14   | 0.4                       | 0.74 |      | S             |
| $C_{iss}$ Short-circuit input capacitance, common source             | $V_{DS} = 14\text{ V}$ , $V_{GS} = 0$ ,<br>$f = 1\text{ MHz}$ , See Figure 18         |                           | 73   |      | pF            |
| $C_{oss}$ Short-circuit output capacitance, common source            |   |                           | 65   |      |               |
| $C_{rss}$ Short-circuit reverse transfer capacitance, common source  |   |                           | 43   |      |               |

NOTES: 3: Technique should limit  $T_J - T_C$  to  $10^\circ\text{C}$  maximum.

4: These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts.



**source-to-drain diode characteristics, Q3A, Q4A, Q5A,  $T_C = 25^\circ\text{C}$**

| PARAMETER |                       | TEST CONDITIONS   | MIN | TYP | MAX | UNIT |
|-----------|-----------------------|---|-----|-----|-----|------|
| $t_{rr}$  | Reverse-recovery time | $I_S = 750\text{ mA}$ ,<br>$V_{DS} = 14\text{ V}$ ,<br>See Figures 2 and 23 |     | 26  |     | ns   |
| $Q_{RR}$  | Total diode charge    |   |     | 17  |     | nC   |

**resistive-load switching characteristics, Q3A, Q3B, Q4A, Q4B, Q5A, Q5B,  $T_C = 25^\circ\text{C}$**


| PARAMETER    |                                 | TEST CONDITIONS  | MIN | TYP  | MAX  | UNIT     |
|--------------|---------------------------------|--|-----|------|------|----------|
| $t_{d(on)}$  | Turn-on delay time              | $V_{DD} = 14\text{ V}$ ,<br>$R_L = 18.7\ \Omega$ ,<br>$t_{dis} = 10\text{ ns}$ ,<br>See Figure 3 |     | 13   |      | ns       |
| $t_{d(off)}$ | Turn-off delay time             |  |     | 13   |      |          |
| $t_r$        | Rise time                       |  |     | 3    |      |          |
| $t_f$        | Fall time                       |  |     | 7    |      |          |
| $Q_g$        | Total gate charge               | $V_{DS} = 14\text{ V}$ ,<br>$I_D = 750\text{ mA}$ ,<br>See Figure 4 and Figure 22                |     | 1    | 1.3  | nC       |
| $Q_{gs(th)}$ | Threshold gate-to-source charge |  |     | 0.2  | 0.25 |          |
| $Q_{gd}$     | Gate-to-drain charge            |  |     | 0.2  | 0.25 |          |
| $L_D$        | Internal drain inductance       |  |     | 7    |      | nH       |
| $L_S$        | Internal source inductance      |  |     | 7    |      |          |
| $R_g$        | Internal gate resistance        |  |     | 0.25 |      | $\Omega$ |

**thermal resistance**

| PARAMETER       |  | TEST CONDITIONS   | MIN | TYP | MAX | UNIT               |
|-----------------|--|-------------------|-----|-----|-----|--------------------|
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | See Notes 5 and 8 |     | 90  |     | $^\circ\text{C/W}$ |
| $R_{\theta JB}$ | Junction-to-board thermal resistance   | See Notes 6 and 8 |     | 52  |     |                    |
| $R_{\theta JP}$ | Junction-to-pin thermal resistance     | See Notes 7 and 8 |     | 28  |     |                    |

- NOTES:
5. Package mounted on a FR4 printed-circuit board with no heatsink.
  6. Package mounted on a 24 in<sup>2</sup>, 4-layer FR4 printed-circuit board.
  7. Package mounted in intimate contact with infinite heatsink.
  8. All outputs with equal power


PARAMETER MEASUREMENT INFORMATION

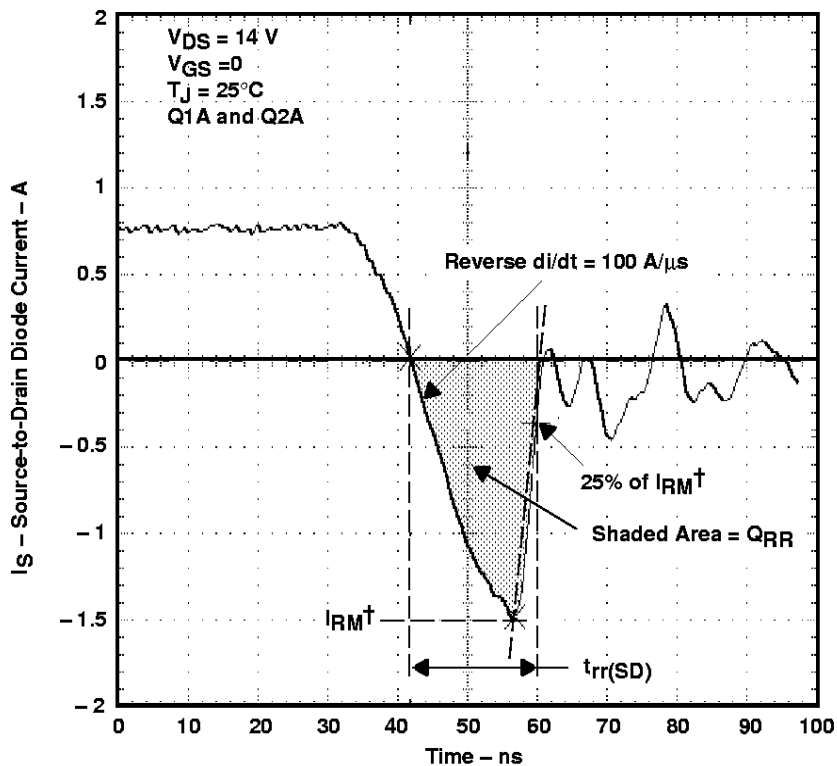

$^\dagger I_{RM}$  = maximum recovery current


Figure 1. Reverse-Recovery-Current Waveform of Source-to-Drain Diodes

PARAMETER MEASUREMENT INFORMATION

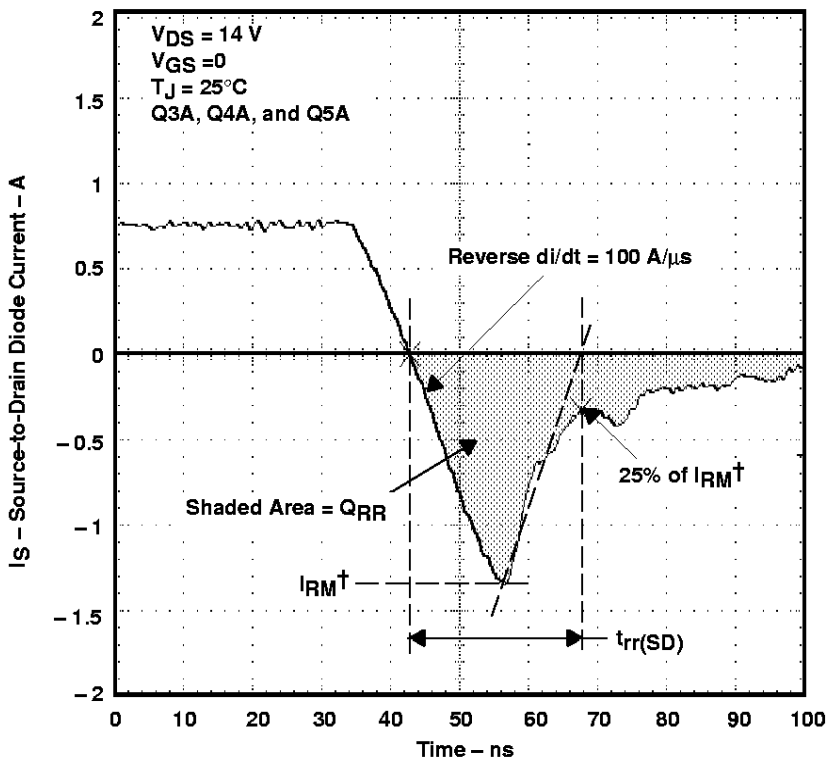

$^\dagger I_{RM}$  = maximum recovery current

Figure 2. Reverse-Recovery-Current Waveform of Source-to-Drain Diodes

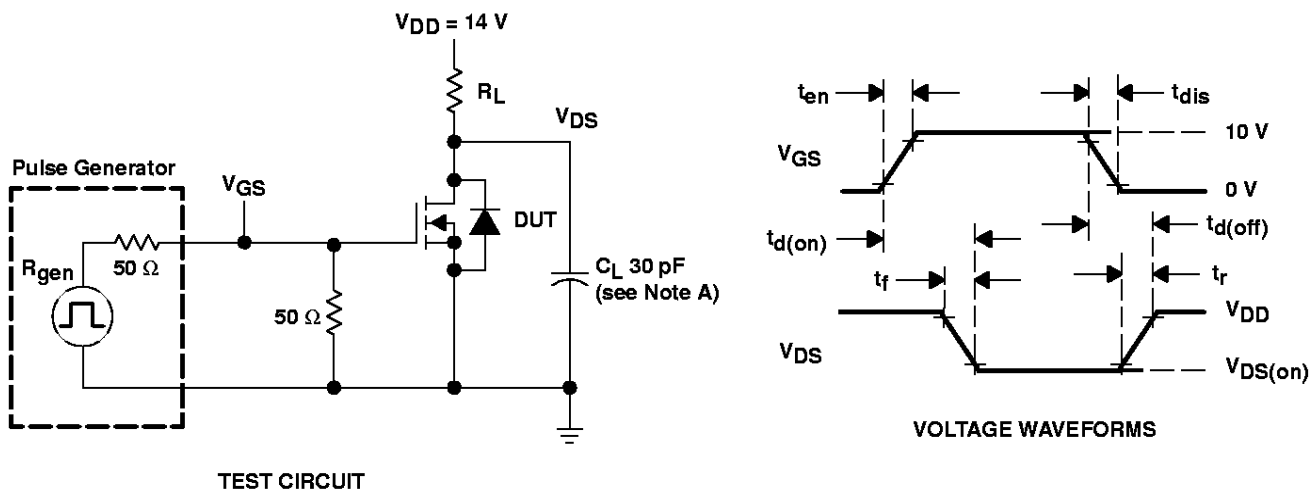

TEST CIRCUIT

NOTE A:  $C_L$  includes probe and jig capacitance.

Figure 3. Resistive-Switching Test Circuit and Voltage Waveforms

# TPIC1502 QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

## PARAMETER MEASUREMENT INFORMATION

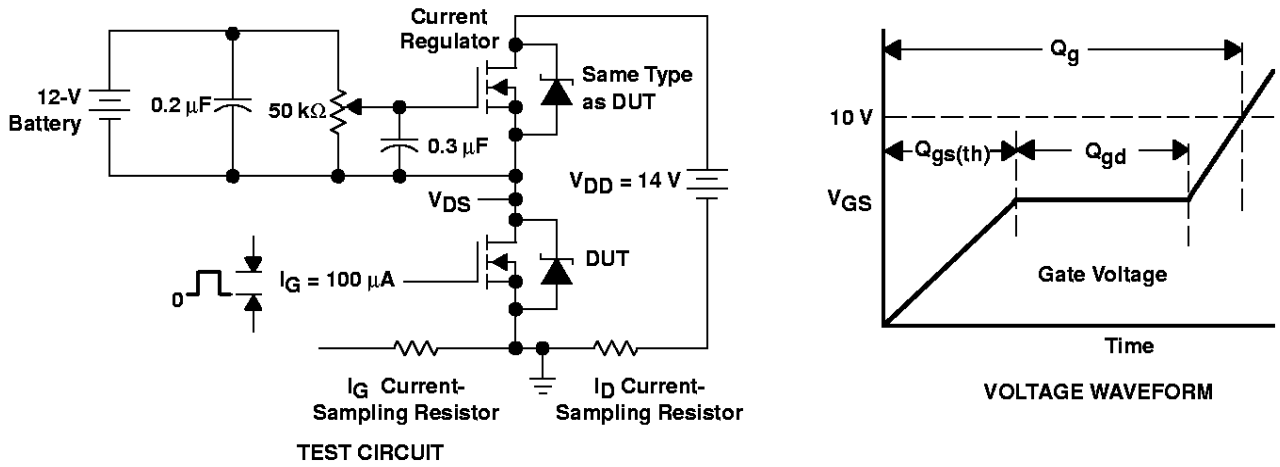


Figure 4. Gate-Charge Test Circuit and Voltage Waveform

## TYPICAL CHARACTERISTICS

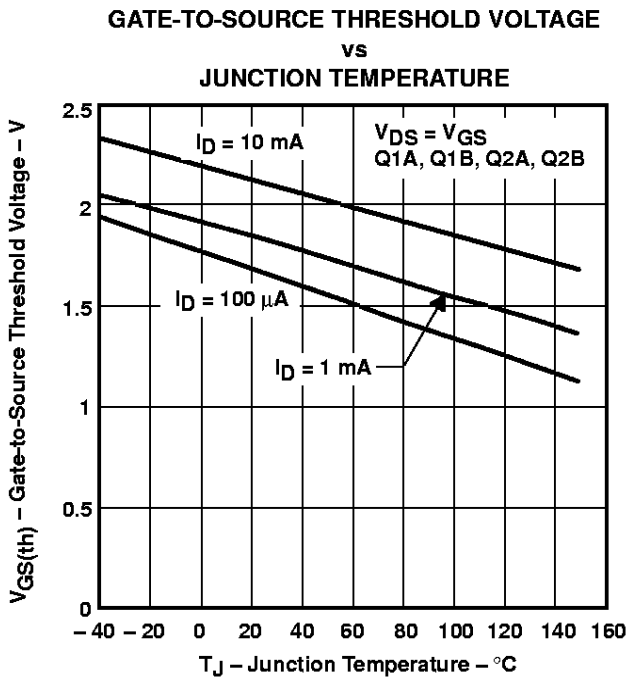


Figure 5

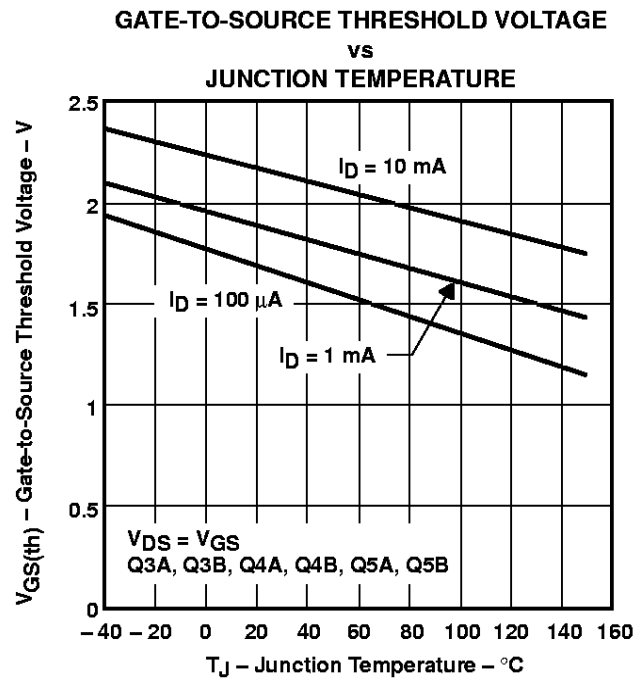


Figure 6



TYPICAL CHARACTERISTICS

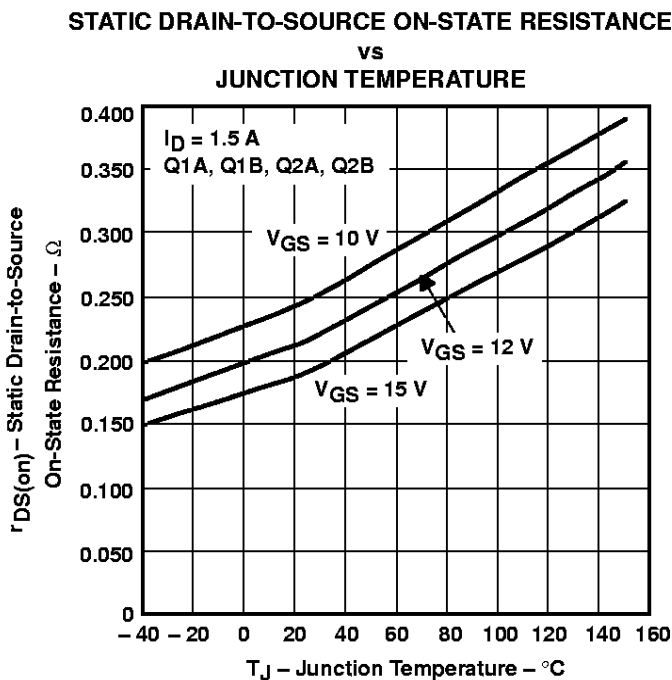


Figure 7

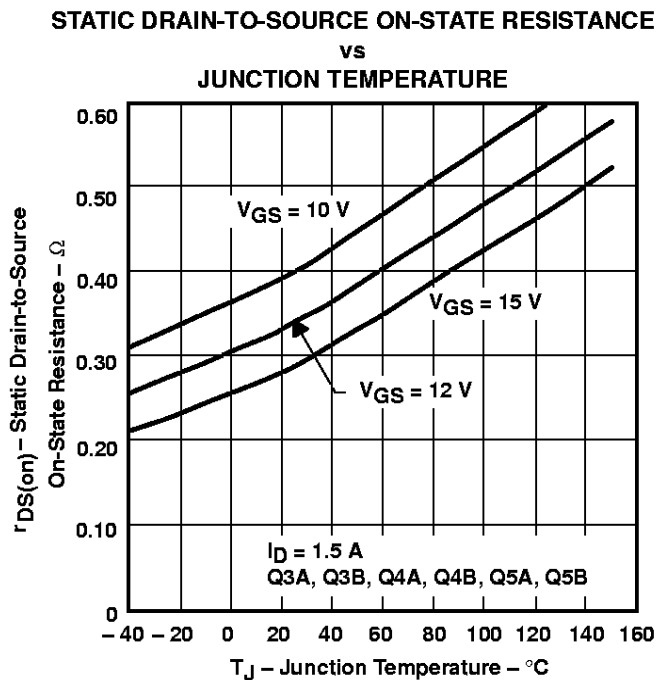


Figure 8

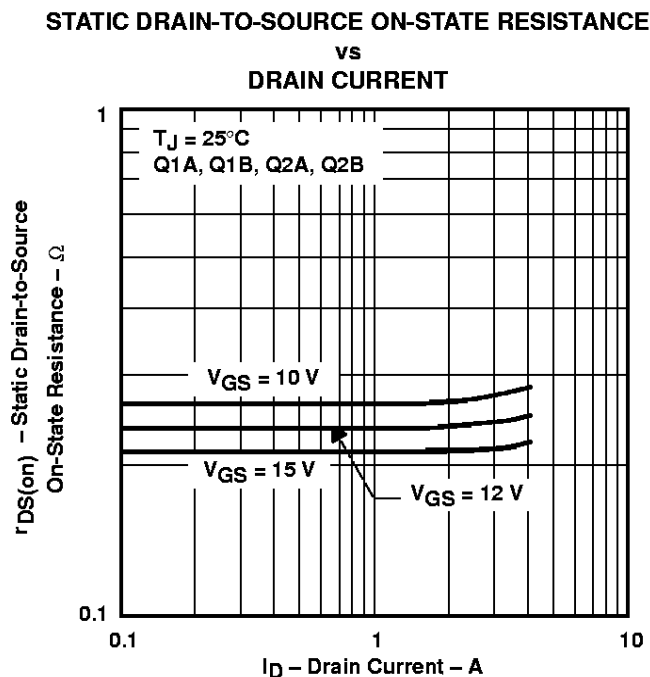


Figure 9



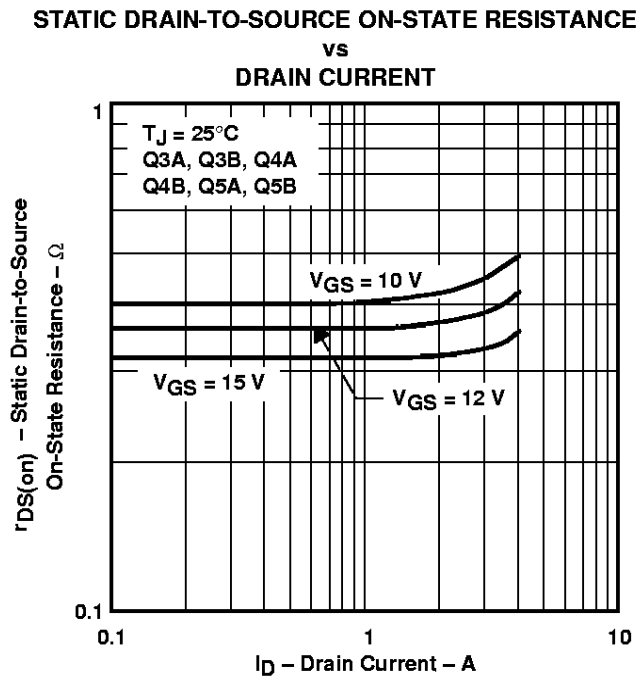


Figure 10


**TYPICAL CHARACTERISTICS**

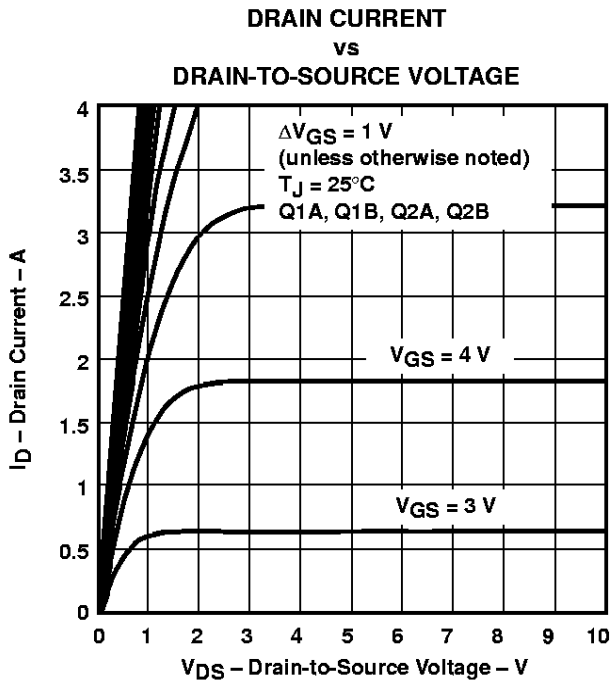


**Figure 11**

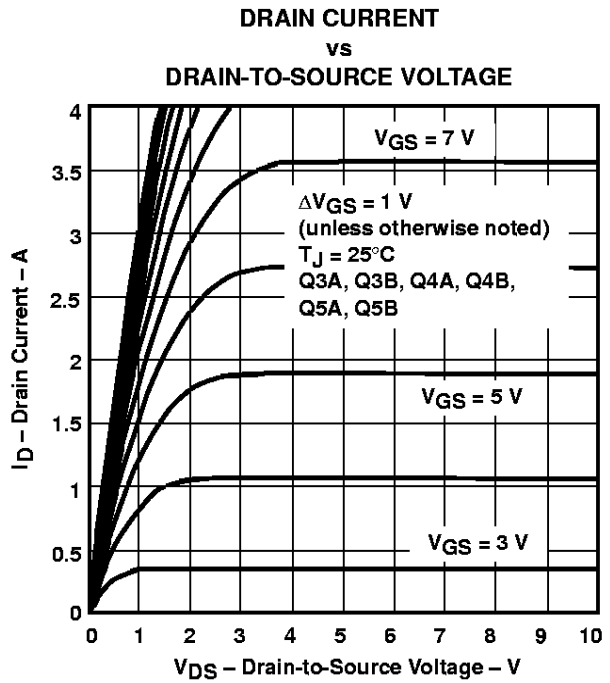

**Figure 12**

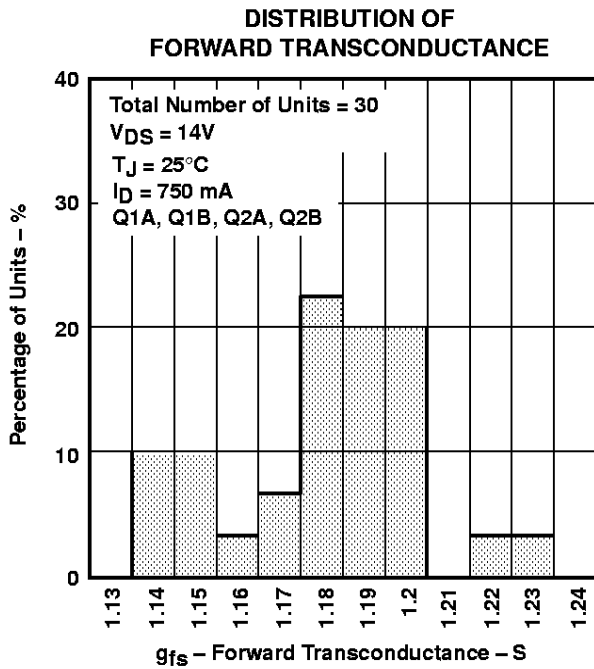

**Figure 13**

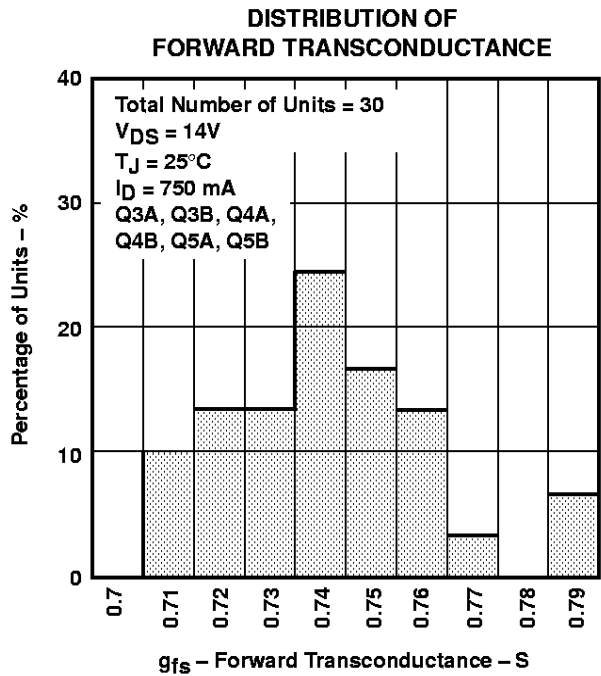

**Figure 14**

TYPICAL CHARACTERISTICS

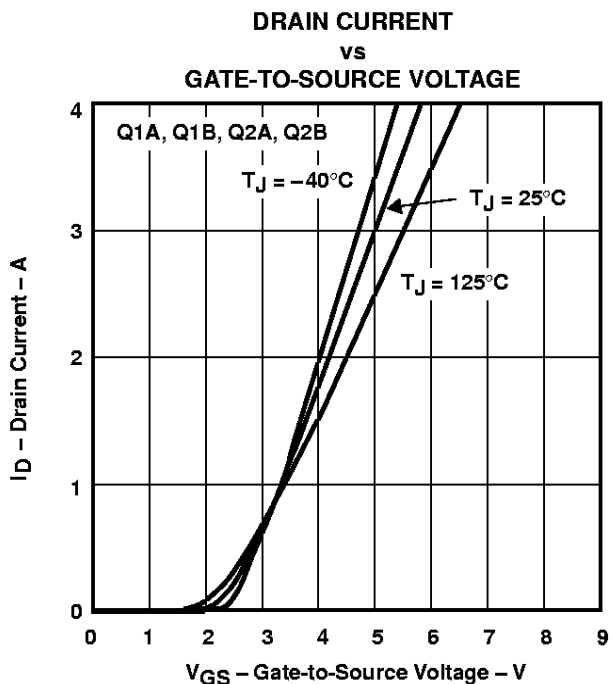


Figure 15

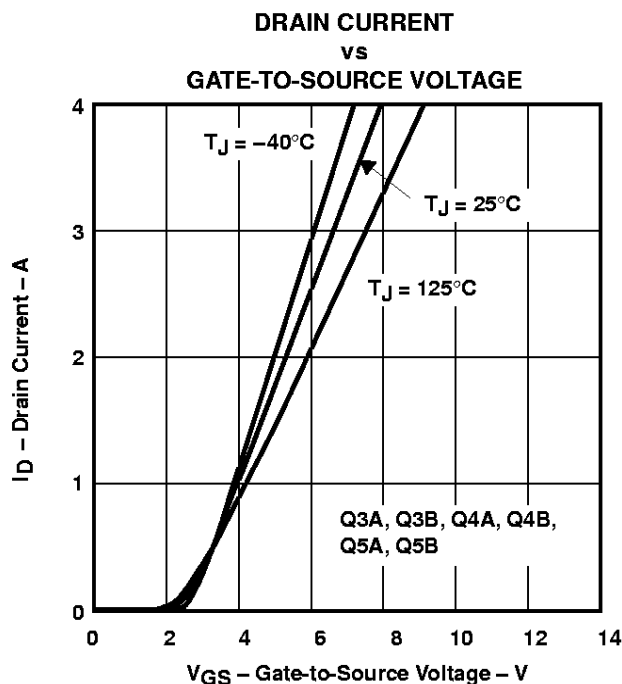


Figure 16

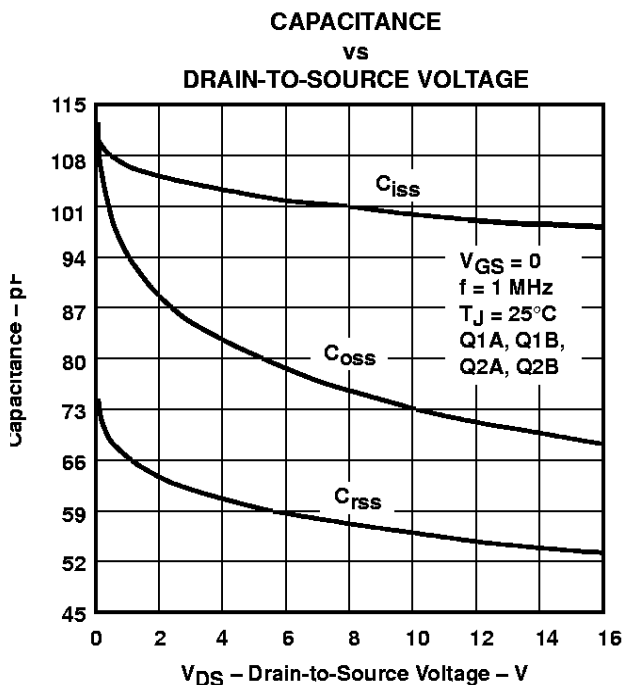


Figure 17

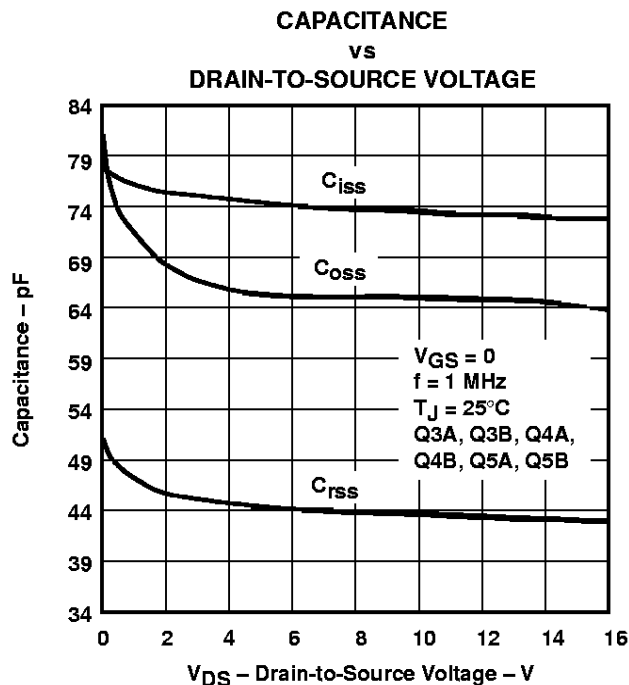


Figure 18

# TPIC1502 QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

## TYPICAL CHARACTERISTICS

SOURCE-TO-DRAIN DIODE CURRENT  
vs  
SOURCE-TO-DRAIN VOLTAGE

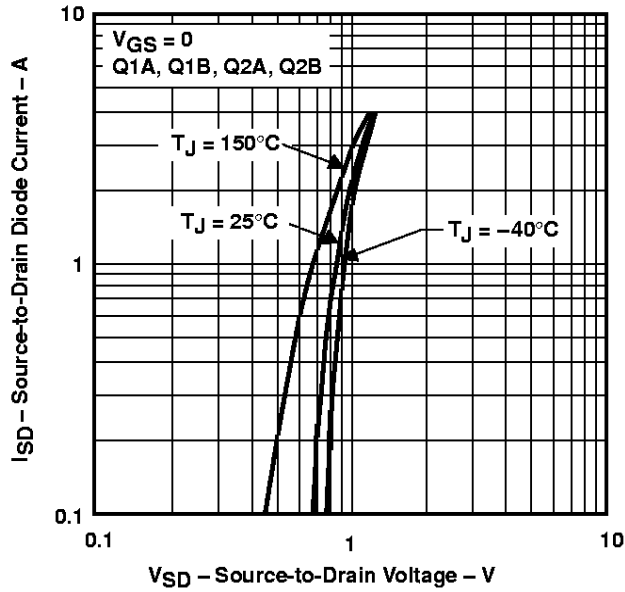


Figure 19

SOURCE-TO-DRAIN DIODE CURRENT  
vs  
SOURCE-TO-DRAIN VOLTAGE

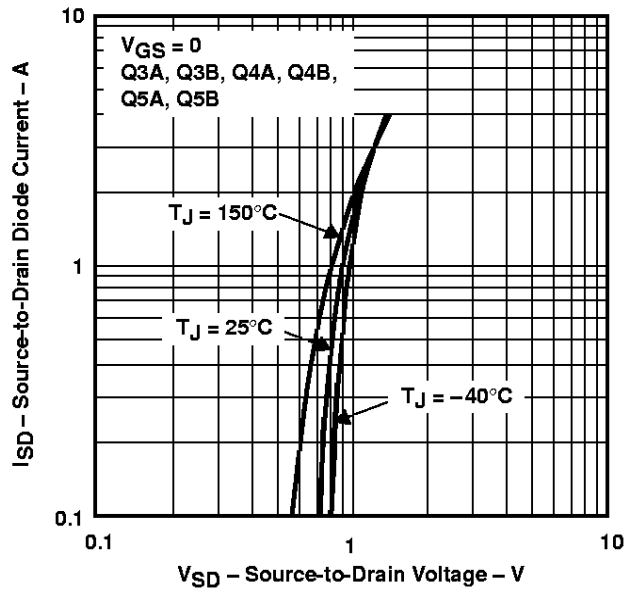


Figure 20

DRAIN-TO-SOURCE VOLTAGE AND  
GATE-TO-SOURCE VOLTAGE  
vs  
GATE CHARGE

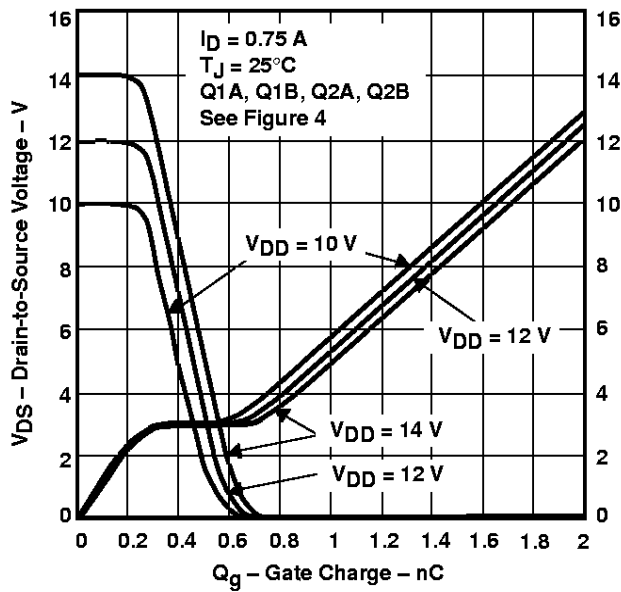


Figure 21

DRAIN-TO-SOURCE VOLTAGE AND  
GATE-TO-SOURCE VOLTAGE  
vs  
GATE CHARGE

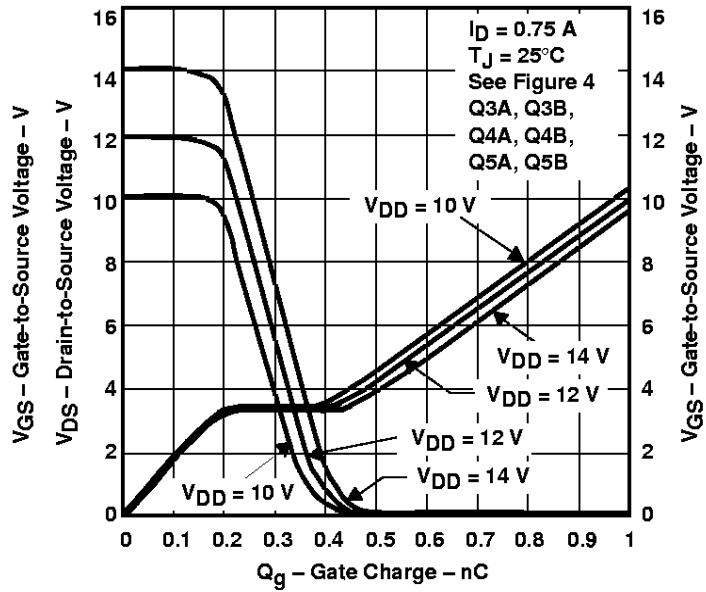


Figure 22



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TYPICAL CHARACTERISTICS

REVERSE RECOVERY TIME  
vs  
REVERSE  $di/dt$

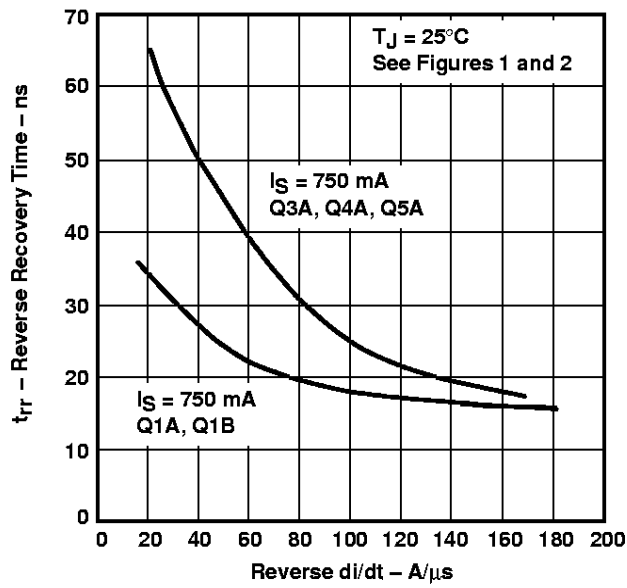



Figure 23

**TPIC1502**  
**QUAD AND HEX POWER DMOS ARRAY**

SLIS054 – OCTOBER 1996


**THERMAL INFORMATION**

**MAXIMUM DRAIN CURRENT**  
**vs**  
**DRAIN-TO-SOURCE VOLTAGE**

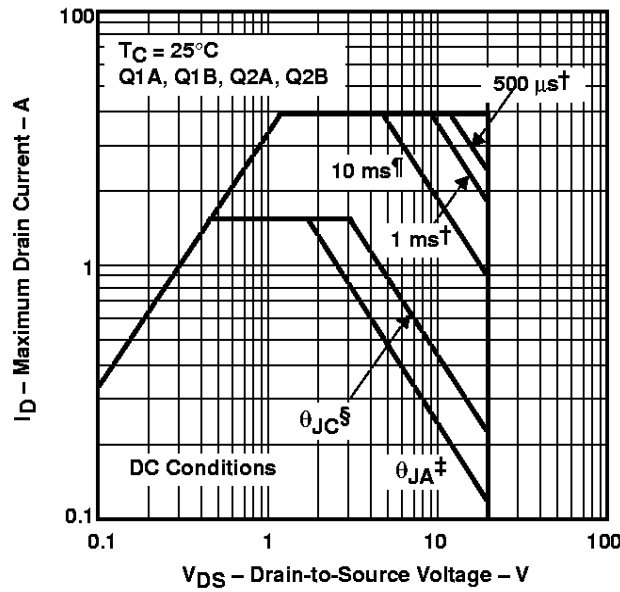

**Figure 24**

**MAXIMUM DRAIN CURRENT**  
**vs**  
**DRAIN-TO-SOURCE VOLTAGE**

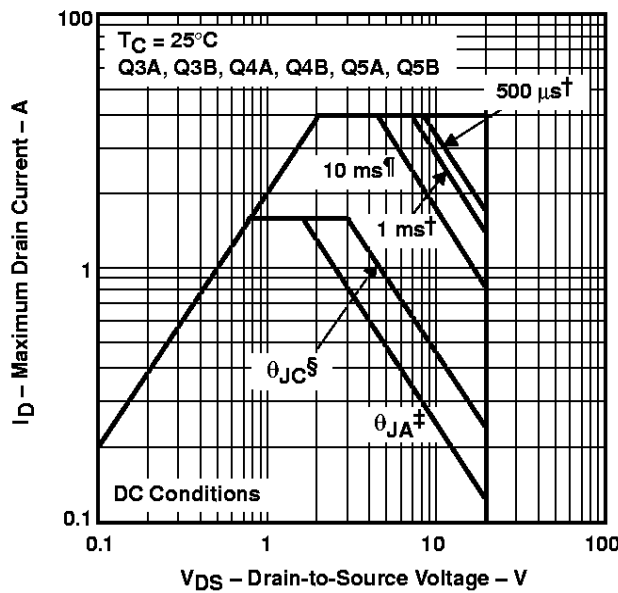

**Figure 25**

† Less than 10% duty cycle

‡ Device is mounted on a 24 in<sup>2</sup>, 4 layer FR4 printed-circuit board.


§ Device is mounted in intimate contact with infinite heatsink.

¶ Less than 2% duty cycle



THERMAL INFORMATION

DW PACKAGE†  
 JUNCTION-TO-BOARD THERMAL RESISTANCE  
 VS  
 PULSE DURATION

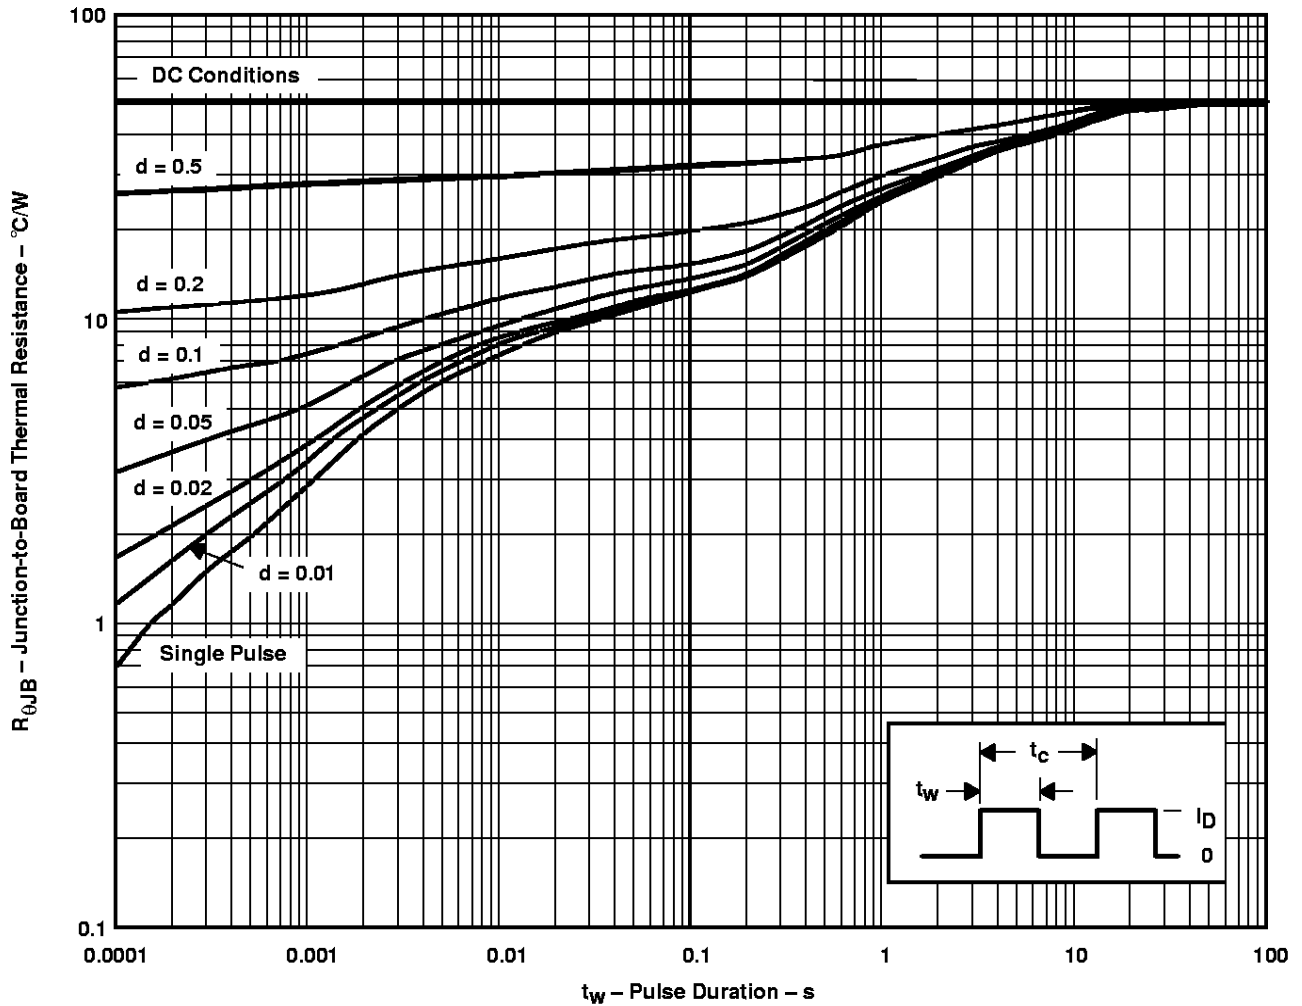

† Device is mounted on 24 in<sup>2</sup>, 4-layer FR4 printed circuit board with no heat sink.

NOTE A:  $Z_{\theta B}(t) = r(t) R_{\theta JB}$   
 $t_w$  = pulse duration  
 $t_c$  = cycle time  
 $d$  = duty cycle =  $t_w/t_c$

Figure 26

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

**CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.**

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.