



Coaxial Cable

086-3SMR+

Mini-Circuits

50Ω 3 inch DC to 18 GHz Right Angle SMA-Male

THE BIG DEAL

- Wideband frequency coverage, DC to 18 GHz
- Low Loss, 0.3 dB at 18 GHz
- Excellent Return Loss, 21 dB at 18 GHz
- Hand formable to almost any custom shape without special bending tools
- 6mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard¹
- Connector interface, meets MIL-STD-348
- Ideal for interconnect of assembled systems



Generic photo used for illustration purposes only

| | |
|-------------------|----------------------|
| Model No. | 086-3SMR+ |
| Case Style | KP1679-3 |
| Connectors | Right Angle SMA-Male |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- Replacement for custom bent 0.086" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers

PRODUCT OVERVIEW

The 086 Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated connector body and gold plated, brass center conductor.

KEY FEATURES

| Feature | Advantages |
|--|---|
| Hand-Formable RF Cables | The 086 Series Hand-Flex™ cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies. |
| Tight Bend Radius | Capable of only 6 mm bend radius, the 086 Hand-Flex™ series is able to make connections in tight spaces making these cables ideal for dense system integration |
| Excellent Return loss | Supporting typical return loss of 33 dB to 6 GHz and 21 dB to 18 GHz, the 086 Series Hand-Flex™ Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors. |
| Good Power Handling Capability: <ul style="list-style-type: none"> • 211W at 0.5 GHz • 35W at 18 GHz | Mini-Circuits 086 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: power rating is at sea-level altitudes. |
| Built in Anti-torque nut | Mini-Circuits 086 Series Hand-Flex™ cables include an anti-torque feature to support the connector body during installation alleviating risk of stress to the connector/cable interface. |
| Jacketed and Unjacketed options | Standard 086 Series cables include a blue FEP insulator jacket reducing the risk of accidental shorting of DC power lines or active pins during installation and operation. Un-jacketed versions are available upon request. |
| Right angle SMA connectors | Avoids multiple right angle bends and improves reliability. |

REV. C
ECO-017476
086-3SMR+
MCL NY
230405



**ELECTRICAL SPECIFICATIONS AT 25°C**

| Parameter | Frequency (GHz) | Min. | Typ. | Max. | Units |
|---------------------|-----------------|------|------|------|--------|
| Frequency Range | | DC | | 18 | GHz |
| Length ² | | 3 | | | inches |
| Insertion Loss | DC - 2 | — | 0.14 | 0.32 | dB |
| | 2 - 6 | — | 0.23 | 0.56 | |
| | 6 - 10 | — | 0.24 | 0.73 | |
| | 10 - 18 | — | 0.39 | 1.00 | |
| Return Loss | DC - 2 | 23 | 31 | — | dB |
| | 2 - 6 | 23 | 25 | — | |
| | 6 - 10 | 17 | 23 | — | |
| | 10 - 18 | 16 | 18 | — | |

1. Unjacketed cable also available upon request.
2. Custom sizes available, consult factory.

ABSOLUTE MAXIMUM RATINGS

| Parameter | Ratings |
|-----------------------------------|---|
| Operating Temperature | -55°C to +105°C |
| Storage Temperature | -55°C to +105°C |
| Power Handling at 25°C, Sea Level | 211W at 0.5 GHz 150W at 1 GHz 104W at 2 GHz 59W at 6 GHz 45W at 10 GHz 35W at 18 GHz |

Permanent damage may occur if any of these limits are exceeded.



HAND FLEX™

Coaxial Cable

086-3SMR+

Mini-Circuits

50Ω 3 inch DC to 18 GHz Right Angle SMA-Male


CABLE CONSTRUCTION



- Center Conductor: Silver Plated Copper Clad Steel
- Dielectric: Solid PTFE
- Outer Shield: Copper Braid, Tin Soaked
- Jacket: FEP, Blue (Unjacketed cable also available upon request)

Connectors: Coupling Nut: Stainless Steel Passivated
 Body: Stainless Steel Gold Plated
 Center Pin: Brass, Gold Plated

OUTLINE DRAWING

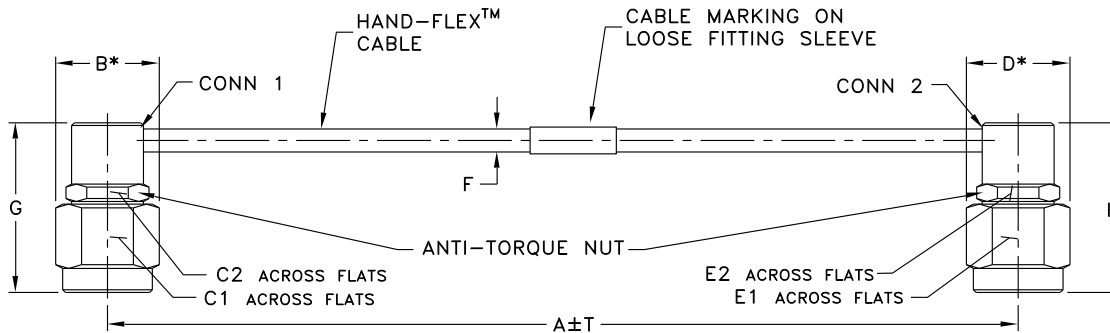

* OVERALL CONNECTOR DIMENSION
 (CONNECTOR SHAPE MAY VARY)

OUTLINE DIMENSIONS (Inch/mm)

| A | B | C1 | C2 | D | E1 | E2 | F | G | H | T | wt |
|-------|------|------|------|------|------|------|------|-------|-------|------|-------|
| 3.0 | .36 | .313 | .250 | .36 | .313 | .250 | .108 | 0.634 | 0.634 | 0.05 | grams |
| 76.20 | 9.14 | 7.95 | 6.35 | 9.14 | 7.95 | 6.35 | 2.74 | 16.10 | 16.10 | 1.27 | 8.17 |





HAND FLEX™

Coaxial Cable

086-3SMR+


Mini-Circuits

50Ω 3 inch DC to 18 GHz Right Angle SMA-Male

TYPICAL PERFORMANCE DATA AND CHARTS

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) | |
|-----------------|---------------------|----------------------|----------------------|
| | | Right Angle SMA-Male | Right Angle SMA-Male |
| 100 | 0.02 | 42.6 | 42.4 |
| 1000 | 0.09 | 42.3 | 42.2 |
| 1800 | 0.12 | 42.9 | 43.4 |
| 2404 | 0.14 | 40.3 | 42.9 |
| 4001 | 0.17 | 33.9 | 33.4 |
| 5000 | 0.19 | 31.1 | 30.0 |
| 6000 | 0.20 | 38.5 | 35.1 |
| 7001 | 0.21 | 32.3 | 36.6 |
| 8001 | 0.22 | 27.0 | 28.9 |
| 9000 | 0.23 | 27.0 | 28.6 |
| 10000 | 0.22 | 29.0 | 28.1 |
| 12001 | 0.20 | 33.5 | 32.5 |
| 14001 | 0.28 | 28.6 | 41.2 |
| 17069 | 0.22 | 24.4 | 31.4 |
| 18000 | 0.29 | 21.3 | 23.2 |

086-3SMR+
INSERTION LOSS

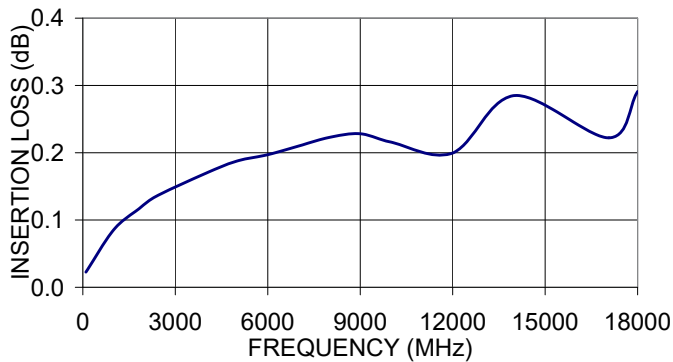

086-3SMR+
RETURN LOSS

