



- Solid base for stable mounting
- Fixed pins for easy PCB insertion
- Operating Temperature Range: -40°C to +85°C




Electrical Specifications @25°C			
Inductance @ 100KHz, 0.1V 0A DC	Inductance @ 100KHz, 0.1V 10.45A DC	DCR (mΩ) Max	HiPot (50/60Hz) 5mA, 3Sec Coil - Core
321.5μH ±15%	250.0μH Min	60.0	1000VAC

All specifications subject to change without notice.

MECHANICAL

Dimensions:  $\frac{\text{inch}}{\text{mm}}$

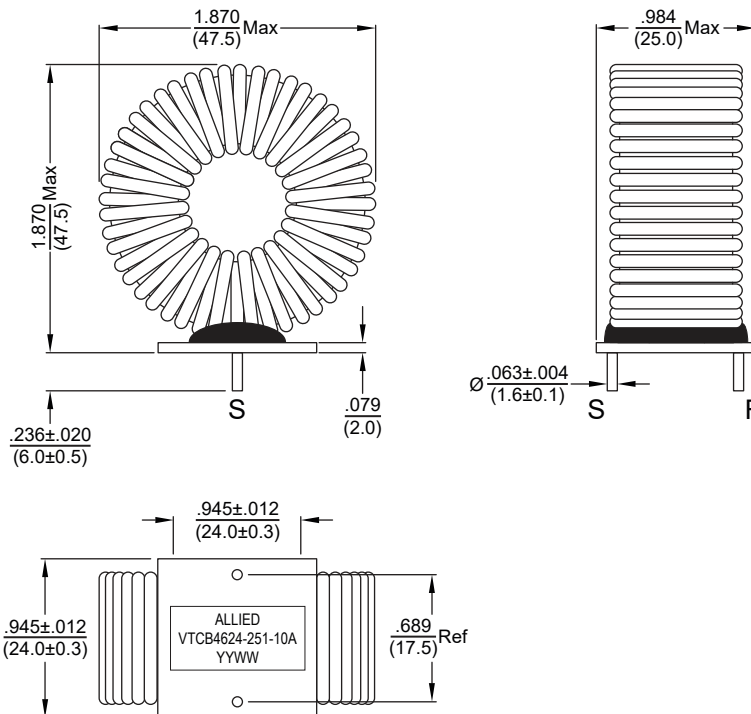

SCHEMATICS

