

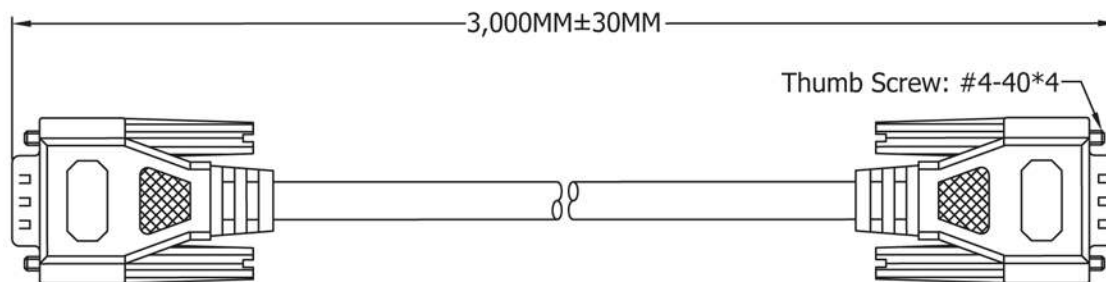


HDB 15 Male
Plastic: Blue

HDB 15 Male
Plastic: Blue



Material:

.CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER
JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*4C+
INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
COLOR:BEIGE OD:Ø8.1± 0.15mm UL-2919

.CONNECTOR:

P1&P2:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
(9TH PIN UNLOAD)

.SHIELD:COPPER-FOIL 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID
.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.

.ELECTRONIC TEST:

<1>.100% OPEN SHORT & MIS WIRE TEST

<2>.CONTACT RESISTANCE 3 OHMS MAX.


<3>.INSULATION RESISTANCE 1M OHMS MIN/ DC 5V

.PACKING:SEE P-0039 REV.C PACKING DRAWING

(HANKING SIZE MUST BE SMALLER THAN PACKING)

PACKING TYPE: DB VP4.

PIN OUT

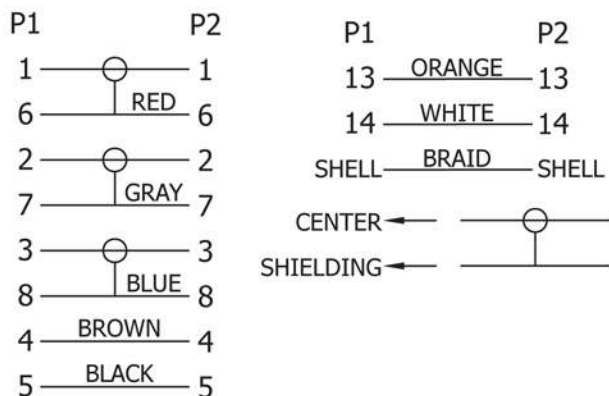

Scale	1:1							Name
TOLERANCE						Drawn	10/26/12	Miller
X.X	±0.40					Approved	10/26/12	Groll
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°					 		
			Modification	Date	Name			



Item No.	Item Description	Unit	Quantity	Unit Price	Total Price
----------	------------------	------	----------	------------	-------------

AK3760-3

Title	Premium VGA Monitor connection cable - HD D-Sub 15 pin Male <=> Male, 3 Meters
--------------	--

Drawing No.

rev00

Replace

Sheet