



**Please note that Cypress is an Infineon Technologies Company.**

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

**Continuity of document content**

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

**Continuity of ordering part numbers**

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.



The following document contains information on Cypress products. The document has the series name, product name, and ordering part numbering with the prefix “MB”. However, Cypress will offer these products to new and existing customers with the series name, product name, and ordering part number with the prefix “CY”.

#### **How to Check the Ordering Part Number**

1. Go to [www.cypress.com/pcn](http://www.cypress.com/pcn).
2. Enter the keyword (for example, ordering part number) in the **SEARCH PCNS** field and click **Apply**.
3. Click the corresponding title from the search results.
4. Download the Affected Parts List file, which has details of all changes

#### **For More Information**

Please contact your local sales office for additional information about Cypress products and solutions.

#### **About Cypress**

Cypress is the leader in advanced embedded system solutions for the world's most innovative automotive, industrial, smart home appliances, consumer electronics and medical products. Cypress' microcontrollers, analog ICs, wireless and USB-based connectivity solutions and reliable, high-performance memories help engineers design differentiated products and get them to market first. Cypress is committed to providing customers with the best support and development resources on the planet enabling them to disrupt markets by creating new product categories in record time. To learn more, go to [www.cypress.com](http://www.cypress.com).



The MB90350E series, loaded 1 channel FULL-CAN\* interface and Flash ROM, is general-purpose Cypress 16-bit microcontroller designing for automotive and industrial applications. Its main feature is the on-board CAN interface, which conforms to CAN standard Version 2.0 Part A and Part B, while supporting a very flexible message buffer scheme and so offering more functions than a normal full CAN approach.

The power supply (3 V) is supplied to the MCU core from an internal regulator circuit. This creates a major advantage in terms of EMI and power consumption.

The PLL clock multiplication circuit provides an internal 42 ns instruction execution time from an external 4 MHz clock. Also, the clock supervisor function can monitor main clock and sub clock independently.

As the peripheral resources, the unit features a 4-channel Output Compare Unit, 6-channel Input Capture Unit, 2 separate 16-bit free-run timers, 2-channel LIN-UART and 15-channel 8/10-bit A/D converter built-in.

: Controller Area Network (CAN) - License of Robert Bosch GmbH

## Features

### Clock

- Built-in PLL clock frequency multiplication circuit
- Selection of machine clocks (PLL clocks) is allowed among frequency division by two on oscillation clock, and multiplication of 1 to 6 times of oscillation clock (for 4 MHz oscillation clock, 4 MHz to 24 MHz).
- Operation by sub clock (up to 50 kHz : 100 kHz oscillation clock divided by two) is allowed (devices without S-suffix only) .
- Minimum execution time of instruction : 42 ns (when operating with 4-MHz oscillation clock, and 6-time multiplied PLL clock).
- Built-in clock modulation circuit

### 16 Mbytes CPU memory space

24-bit internal addressing

### Instruction system best suited to controller

- Wide choice of data types (bit, byte, word, and long word)
- Wide choice of addressing modes (23 types)
- Enhanced multiply-divide instructions with sign and RETI instructions

### Clock supervisor (MB90x356x and MB90x357x only)

Main clock or sub clock is monitored independently.

### Enhanced high-precision computing with 32-bit accumulator

### Instruction system compatible with high-level language (C language) and multitask

- Employing system stack pointer
- Enhanced various pointer indirect instructions
- Barrel shift instructions

### Increased processing speed

4-byte instruction queue

### Powerful interrupt function

- Powerful 8-level, 34-condition interrupt feature
- Up to 8 channels external interrupts are supported.

### Automatic data transfer function independent of CPU

- Extended intelligent I/O service function (EI<sup>2</sup>OS): up to 16 channels
- DMA: up to 16 channels

### Low power consumption (standby) mode

- Sleep mode (a mode that stops CPU operating clock)
- Main timer mode (a timebase timer mode switched from the main clock mode)
- PLL timer mode (a timebase timer mode switched from the PLL clock mode)
- Watch mode (a mode that operates sub clock and watch timer only)
- Stop mode (a mode that stops oscillation clock and sub clock)
- CPU intermittent operation mode

### Process

CMOS technology

### I/O port

- General-purpose input/output port (CMOS output)  
49 ports (devices without S-suffix : devices that correspond to sub clock)  
51 ports (devices with S-suffix : devices that do not correspond to sub clock)

### Sub clock pin (X0A, X1A)

- Yes (using the external oscillation) : devices without S-suffix
- No (using the sub clock mode at internal CR oscillation) : devices with S-suffix

### Timer

- Timebase timer, watch timer, watchdog timer : 1 channel

- 8/16-bit PPG timer : 8-bit ∞ 10 channels or 16-bit × 6 channels
- 16-bit reload timer : 2 channels (only Evaluation products has 4 channels)
- 16-bit input/output timer
  - 16-bit free-run timer : 2 channels (FRT0 : ICU0/1, FRT1 : ICU4/5/6/7, OCU4/5/6/7)
  - 16-bit input capture: (ICU) : 6 channels
  - 16-bit output compare : (OCU) : 4 channels

**FULL-CAN interface: 1 channel**

- Compliant with CAN standard Version2.0 Part A and Part B
- 16 message buffers are built-in
- CAN wake-up function

**LIN-UART: 2 channels**

- Equipped with full-duplex double buffer
- Clock-asynchronous or clock-synchronous serial transmission is available.

**I<sup>2</sup>C interface: 1 channel**

Up to 400 kbps transfer rate

**DTP/External interrupt: 8 channels, CAN wakeup: 1 channel**

Module for activation of extended intelligent I/O service (EI<sup>2</sup>OS), DMA, and generation of external interrupt by external input.

**Delay interrupt generator module**

Generates interrupt request for task switching.

**8/10-bit A/D converter: 15 channels**

- Resolution is selectable between 8-bit and 10-bit.
- Activation by external trigger input is allowed.
- Conversion time : 3 μs (at 24 MHz machine clock, including sampling time)

**Address matching detection (Program patch) function**

- Address matching detection for 6 address pointers.

**Capable of changing input voltage level for port**

- Automotive/CMOS-Schmitt (initial level is Automotive in single chip mode)
- TTL level (corresponds to external bus pins only, initial level of these pins is TTL in external bus mode)

**Low voltage/CPU operation detection reset (devices with T-suffix)**

- Detects low voltage (4.0 V ± 0.3 V) and resets automatically
- Resets automatically when program is runaway and counter is not cleared within interval time (approx. 262 ms : external 4 MHz)

**Dual operation Flash memory (only devices 128 Kbytes Flash memory)**

- Erase/write and read can be executed in the different bank (Upper Bank/Lower Bank) at the same time.

**Supported T<sub>A</sub> = + 125°C**

The maximum operating frequency is 24 MHz\* : (at T<sub>A</sub> = +125°C) .

**Flash security function**

- Protects the content of Flash memory (MB90F352x, MB90F357x only)

**External bus interface**

- 4 Mbytes external memory space MB90F351E(S), MB90F351TE(S), MB90F352E(S), MB90F352TE(S) : External bus Interface can not be used in internal vector mode. It can be used only in external vector mode.

\* : If used exceeding T<sub>A</sub> = + 105 °C, be sure to contact Cypress for reliability limitations.

**Contents**

|  |           |  |           |
|--|-----------|--|-----------|
| <b>Product Lineup1 (Without Clock supervisor function)</b> | <b>4</b>  | Reset Standby Input .....                        | 62        |
| <b>Product Lineup 2 (With Clock supervisor function)</b>   | <b>7</b>  | Power On Reset .....                             | 63        |
| <b>Packages and Product Correspondence</b>                 | <b>12</b> | Clock Output Timing .....                        | 63        |
| <b>Pin Assignments</b>                                     | <b>13</b> | Bus Timing (Read) .....                          | 64        |
| <b>Pin Description</b>                                     | <b>14</b> | Bus Timing (Write) .....                         | 66        |
| <b>I/O Circuit Type</b>                                    | <b>19</b> | Ready Input Timing .....                         | 67        |
| <b>Handling Devices</b>                                    | <b>22</b> | Hold Timing .....                                | 68        |
| <b>Block Diagrams</b>                                      | <b>27</b> | LIN-UART2/3 .....                                | 69        |
| <b>Memory Map</b>  | <b>33</b> | Trigger Input Timing .....                       | 73        |
| <b>I/O Map</b>   | <b>34</b> | Timer Related Resource Input Timing .....        | 74        |
| <b>CAN Controllers</b>                                     | <b>42</b> | Timer Related Resource Output Timing .....       | 74        |
| <b>Interrupt Factors, Interrupt Vectors, Interrupt</b>     |           | I2C Timing .....                                 | 75        |
| <b>Control Register</b>                                    | <b>50</b> | A/D Converter .....                              | 76        |
| <b>Electrical Characteristics</b>                          | <b>51</b> | Definition of A/D Converter Terms .....          | 80        |
| Absolute Maximum Ratings .....                             | 51        | Flash Memory Program/Erase Characteristics ..... | 82        |
| Recommended Operating Conditions .....                     | 53        | <b>Ordering Information</b> .....                | <b>83</b> |
| DC Characteristics .....                                   | 54        | <b>Package Dimensions</b> .....                  | <b>85</b> |
| AC Characteristics .....                                   | 59        | <b>Major Changes</b> .....                       | <b>87</b> |
| Clock Timing .....   | 59        |  |           |

**1. Product Lineup1 (Without Clock supervisor function)**
**■ Flash memory products**

| Part Number                               | MB90F351E<br>MB90F352E   | MB90F351TE<br>MB90F352TE | MB90F351ES<br>MB90F352ES | MB90F351TES<br>MB90F352TES |
|---|--|--------------------------|--------------------------|----------------------------|
| Type                                      | Flash memory products  |                          |                          |                            |
| CPU                                       | F <sup>2</sup> MC-16LX CPU   |                          |                          |                            |
| System clock                              | PLL clock multiplication circuit (× 1, × 2, × 3, × 4, × 6, 1/2 when PLL stops)<br>Minimum instruction execution time : 42 ns (oscillation clock 4 MHz, PLL × 6)  |                          |                          |                            |
| ROM                                       | 64 Kbytes Flash memory : MB90F351E(S), MB90F351TE(S)<br>128 Kbytes Dual operation Flash memory (Erase/write and read can be operated at the same time) :<br>MB90F352E(S), MB90F352TE(S)  |                          |                          |                            |
| RAM                                       | 4 Kbytes   |                          |                          |                            |
| Emulator-specific power supply*           | —  |                          |                          |                            |
| Sub clock pin (X0A, X1A) (Max 100 kHz)    | Yes  |                          | No                       |                            |
| Clock supervisor                          | No   |                          |                          |                            |
| Low voltage/CPU operation detection reset | No   | Yes                      | No                       | Yes                        |
| Operating voltage                         | 3.5 V to 5.5 V : at normal operating (not using A/D converter)<br>4.0 V to 5.5 V : at using A/D converter/Flash programming<br>4.5 V to 5.5 V : at using external bus  |                          |                          |                            |
| Operating temperature                     | −40°C to +125°C  |                          |                          |                            |
| Package                                   | LQFP-64  |                          |                          |                            |
| LIN-UART                                  | 2 channels   |                          |                          |                            |
|   | Wide range of baud rate settings using a dedicated baud rate generator (reload timer)<br>Special synchronous options for adapting to different synchronous serial protocols<br>LIN functionality working either as master or slave LIN device  |                          |                          |                            |
| I <sup>2</sup> C (400 kbps)               | 1 channel  |                          |                          |                            |
| A/D converter                             | 15 channels  |                          |                          |                            |
|   | 10-bit or 8-bit resolution<br>Conversion time : Min 3 μs includes sample time (per one channel)  |                          |                          |                            |
| 16-bit reload timer (2 channels)          | Operation clock frequency : $f_{sys}/2^1$ , $f_{sys}/2^3$ , $f_{sys}/2^5$ ( $f_{sys}$ = Machine clock frequency)<br>Supports External Event Count function.  |                          |                          |                            |
| 16-bit Free-run timer (2 channels)        | Free-run Timer 0 (clock input FRCK0) corresponds to ICU0/1.<br>Free-run Timer 1 (clock input FRCK1) corresponds to ICU4/5/6/7, OCU4/5/6/7.   |                          |                          |                            |
|   | Signals an interrupt when overflowing.<br>Supports Timer Clear when it matches Output Compare (ch.0, ch.4) .<br>Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ , $f_{sys}/2^5$ , $f_{sys}/2^6$ , $f_{sys}/2^7$ ( $f_{sys}$ = Machine clock frequency) |                          |                          |                            |
| 16-bit output compare                     | 4 channels   |                          |                          |                            |
|   | Signals an interrupt when 16-bit free-run Timer matches with output compare registers.<br>A pair of compare registers can be used to generate an output signal.  |                          |                          |                            |

*(Continued)*

(Continued)

| Part Number                           | MB90F351E<br>MB90F352E  | MB90F351TE<br>MB90F352TE | MB90F351ES<br>MB90F352ES | MB90F351TES<br>MB90F352TES |
|---------------------------------------|---|--------------------------|--------------------------|----------------------------|
| 16-bit Input capture                  | 6 channels  |                          |                          |                            |
|                                       | Retains 16-bit free-run timer value by (rising edge, falling edge or rising & falling edge) , signals an interrupt.   |                          |                          |                            |
| 8/16-bit programmable pulse generator | 6 channels (16-bit)/10 channels (8-bit)<br>8-bit reload counters × 12<br>8-bit reload registers for L pulse width × 12<br>8-bit reload registers for H pulse width×12   |                          |                          |                            |
|                                       | Supports 8-bit and 16-bit operation modes.<br>A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as 8-bit prescaler + 8-bit reload counter.<br>Operation clock frequency : fsys, fsys/2 <sup>1</sup> , fsys/2 <sup>2</sup> , fsys/2 <sup>3</sup> , fsys/2 <sup>4</sup> or 128 μs@fosc = 4 MHz<br>(fsys = Machine clock frequency, fosc = Oscillation clock frequency)  |                          |                          |                            |
| CAN interface                         | 1 channel   |                          |                          |                            |
|                                       | Compliant with CAN standard Version2.0 Part A and Part B.<br>Automatic re-transmission in case of error<br>Automatic transmission responding to Remote Frame<br>16 prioritized message buffers for data and ID<br>Supports multiple messages.<br>Flexible configuration of acceptance filtering :<br>Full bit compare/Full bit mask/Two partial bit masks<br>Supports up to 1 Mbps.   |                          |                          |                            |
| External interrupt                    | 8 channels  |                          |                          |                            |
|                                       | Can be used rising edge, falling edge, starting up by "H"/"L" level input, external interrupt, extended intelligent I/O services (EI <sup>2</sup> OS) and DMA.  |                          |                          |                            |
| D/A converter                         | —   |                          |                          |                            |
| I/O ports                             | Virtually all external pins can be used as general purpose I/O port.<br>All push-pull outputs<br>Bit-wise settable as input/output or peripheral signal<br>Settable as CMOS schmitt trigger/ automotive inputs<br>TTL input level settable for external bus (only for external bus pin)   |                          |                          |                            |
| Flash memory                          | Supports automatic programming, Embedded Algorithm<br>Write/Erase/Erase-Suspend/Resume commands<br>A flag indicating completion of the algorithm<br>Number of erase cycles : 10000 times<br>Data retention time : 20 years<br>Boot block configuration<br>Erase can be performed on each block.<br>Block protection with external programming voltage<br>Flash Security Feature for protecting the content of the Flash (MB90F352E(S) and MB90F352TE(S) only) |                          |                          |                            |
| Corresponding evaluation name         | MB90V340E-102   |                          | MB90V340E-101            |                            |

\* : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.  
Please refer to the Emulator hardware manual about details.

**■ MASK ROM products/Evaluation products**

| Part Number                               | MB90351E<br>MB90352E  | MB90351TE<br>MB90352TE | MB90351ES<br>MB90352ES | MB90351TES<br>MB90352TES | MB90V340E-1<br>01  | MB90V340E-1<br>02 |
|---|---|------------------------|------------------------|--------------------------|--|-------------------|
| Type                                      | MASK ROM products   |                        |                        |                          | Evaluation products  |                   |
| CPU                                       | F <sup>2</sup> MC-16LX CPU  |                        |                        |                          |  |                   |
| System clock                              | PLL clock multiplication circuit (×1, ×2, ×3, ×4, ×6, 1/2 when PLL stops)<br>Minimum instruction execution time : 42 ns (oscillation clock 4 MHz, PLL × 6)  |                        |                        |                          |  |                   |
| ROM                                       | MASK ROM<br>64 Kbytes : MB90351E(S), MB90351TE(S)<br>128 Kbytes : MB90352E(S), MB90352TE(S)   |                        |                        |                          | External   |                   |
| RAM                                       | 4 Kbytes  |                        |                        |                          | 30 Kbytes  |                   |
| Emulator-specific power supply*           | —   |                        |                        |                          | Yes  |                   |
| Sub clock pin (X0A, X1A) (Max 100 kHz)    | Yes   |                        | No                     |                          | No   | Yes               |
| Clock supervisor                          | No  |                        |                        |                          |  |                   |
| Low voltage/CPU operation detection reset | No  | Yes                    | No                     | Yes                      | No   |                   |
| Operating voltage range                   | 3.5 V to 5.5 V : at normal operating (not using A/D converter)<br>4.0 V to 5.5 V : at using A/D converter<br>4.5 V to 5.5 V : at using external bus   |                        |                        |                          | 5 V ± 10%  |                   |
| Operating temperature range               | -40°C to +125°C   |                        |                        |                          | —  |                   |
| Package                                   | LQFP-64   |                        |                        |                          | PGA-299  |                   |
| LIN-UART                                  | 2 channels  |                        |                        |                          | 5 channels   |                   |
|   | Wide range of baud rate settings using a dedicated baud rate generator (reload timer)<br>Special synchronous options for adapting to different synchronous serial protocols<br>LIN functionality working either as master or slave LIN device   |                        |                        |                          |  |                   |
| I <sup>2</sup> C (400 kbps)               | 1 channel   |                        |                        |                          | 2 channels   |                   |
| A/D converter                             | 15 channels   |                        |                        |                          | 24 channels  |                   |
|   | 10-bit or 8-bit resolution<br>Conversion time : Min 3 μs includes sample time (per one channel)   |                        |                        |                          |  |                   |
| 16-bit reload timer                       | 2 channels  |                        |                        |                          | 4 channels   |                   |
|   | Operation clock frequency : fsys/2 <sup>1</sup> , fsys/2 <sup>3</sup> , fsys/2 <sup>5</sup> (fsys = Machine clock frequency)<br>Supports External Event Count function.   |                        |                        |                          |  |                   |
| 16-bit free-run timer (2 channels)        | Free-run Timer 0 (clock input FRCK0) corresponds to ICU0/1.<br>Free-run Timer 1 (clock input FRCK1) corresponds to ICU4/5/6/7, OCU4/5/6/7.  |                        |                        |                          | Free-run Timer 0 corresponds to ICU0/1/2/3, OCU0/1/2/3.<br>Free-run Timer 1 corresponds to ICU4/5/6/7, OCU4/5/6/7. |                   |
|   | Signals an interrupt when overflowing.<br>Supports Timer Clear when it matches Output Compare (ch.0, ch.4) .<br>Operation clock frequency : fsys, fsys/2 <sup>1</sup> , fsys/2 <sup>2</sup> , fsys/2 <sup>3</sup> , fsys/2 <sup>4</sup> , fsys/2 <sup>5</sup> , fsys/2 <sup>6</sup> , fsys/2 <sup>7</sup><br>(fsys = Machine clock frequency) |                        |                        |                          |  |                   |

*(Continued)*



(Continued)

| Part Number                           | MB90351E<br>MB90352E   | MB90351TE<br>MB90352TE | MB90351ES<br>MB90352ES | MB90351TES<br>MB90352TES | MB90V340E-1<br>01   | MB90V340E-1<br>02 |
|---------------------------------------|--|------------------------|------------------------|--------------------------|---|-------------------|
| Parameter                             |  |                        |                        |                          |   |                   |
| 16-bit output compare                 | 4 channels   |                        |                        |                          | 8 channels  |                   |
|                                       | Signals an interrupt when 16-bit free-run Timer matches output compare registers.<br>A pair of compare registers can be used to generate an output signal.   |                        |                        |                          |   |                   |
| 16-bit input capture                  | 6 channels   |                        |                        |                          | 8 channels  |                   |
|                                       | Retains 16-bit free-run timer value by (rising edge, falling edge, or the both edges), signals an interrupt.   |                        |                        |                          |   |                   |
| 8/16-bit programmable pulse generator | 6 channels (16-bit)/10 channels (8-bit)<br>8-bit reload counters × 12<br>8-bit reload registers for L pulse width×12<br>8-bit reload registers for H pulse width×12  |                        |                        |                          | 8 channels (16-bit)/<br>16 channels (8-bit)<br>8-bit reload counters × 16<br>8-bit reload registers for<br>L pulse width × 16<br>8-bit reload registers for<br>H pulse width × 16 |                   |
|                                       | Supports 8-bit and 16-bit operation modes.<br>A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as<br>8-bit prescaler + 8-bit reload counter.<br>Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ or $128 \mu s @ f_{osc} = 4 \text{ MHz}$<br>( $f_{sys}$ = Machine clock frequency, $f_{osc}$ = Oscillation clock frequency) |                        |                        |                          |   |                   |
| CAN interface                         | 1 channel  |                        |                        |                          | 3 channels  |                   |
|                                       | Compliant with CAN standard Version 2.0 Part A and Part B.<br>Automatic re-transmission in case of error<br>Automatic transmission responding to Remote Frame<br>16 prioritized message buffers for data and ID<br>Supports multiple messages.<br>Flexible configuration of acceptance filtering :<br>Full bit compare/Full bit mask/Two partial bit masks<br>Supports up to 1 Mbps.                               |                        |                        |                          |   |                   |
| External interrupt                    | 8 channels   |                        |                        |                          | 16 channels   |                   |
|                                       | Can be used rising edge, falling edge, starting up by "H"/"L" level input, external interrupt,<br>extended intelligent I/O services (EI <sup>2</sup> OS) and DMA.  |                        |                        |                          |   |                   |
| D/A converter                         | —  |                        |                        |                          | 2 channels  |                   |
| I/O ports                             | Virtually all external pins can be used as general purpose I/O port.<br>All push-pull outputs<br>Bit-wise settable as input/output or peripheral signal<br>Settable as CMOS schmitt trigger/ automotive inputs<br>TTL input level settable for external bus (only for external bus pin)  |                        |                        |                          |   |                   |
| Flash memory                          | —  |                        |                        |                          |   |                   |
| Corresponding evaluation name         | MB90V340E-102  |                        | MB90V340E-101          |                          | —   |                   |

\* : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.  
Please refer to the Emulator hardware manual about details.

## 2. Product Lineup 2 (With Clock supervisor function)

### ■ Flash memory products

| Part Number                               | MB90F356E<br>MB90F357E   | MB90F356TE<br>MB90F357TE | MB90F356ES<br>MB90F357ES | MB90F356TES<br>MB90F357TES |
|---|--|--------------------------|--------------------------|----------------------------|
| Type                                      | Flash memory products  |                          |                          |                            |
| CPU                                       | F <sup>2</sup> MC-16LX CPU   |                          |                          |                            |
| System clock                              | On-chip PLL clock multiplier (×1, ×2, ×3, ×4, ×6, 1/2 when PLL stops)<br>Minimum instruction execution time : 42 ns (oscillation clock 4 MHz, PLL × 6)   |                          |                          |                            |
| ROM                                       | 64 Kbytes Flash memory : MB90F356E(S), MB90F356TE(S)<br>128 Kbytes Dual operation Flash memory (Erase/write and read can be operated at the same time) : MB90F357E(S), MB90F357TE(S)   |                          |                          |                            |
| RAM                                       | 4 Kbytes   |                          |                          |                            |
| Emulator-specific power supply*           | —  |                          |                          |                            |
| Sub clock pin (X0A, X1A)                  | Yes  |                          | No                       |                            |
| Clock supervisor                          | Yes  |                          |                          |                            |
| Low voltage/CPU operation detection reset | No   | Yes                      | No                       | Yes                        |
| Operating voltage range                   | 3.5 V to 5.5 V : at normal operating (not using A/D converter)<br>3.5 V to 5.5 V : at using A/D converter/Flash programming<br>3.5 V to 5.5 V : at using external bus  |                          |                          |                            |
| Operating temperature range               | −40°C to +125°C  |                          |                          |                            |
| Package                                   | LQFP-64  |                          |                          |                            |
| LIN-UART                                  | 2 channels   |                          |                          |                            |
|   | Wide range of baud rate settings using a dedicated baud rate generator (reload timer)<br>Special synchronous options for adapting to different synchronous serial protocols<br>LIN functionality working either as master or slave LIN device  |                          |                          |                            |
| I <sup>2</sup> C (400 kbps)               | 1 channel  |                          |                          |                            |
| A/D converter                             | 15 channels  |                          |                          |                            |
|   | 10-bit or 8-bit resolution<br>Conversion time : Min 3 μs includes sample time (per one channel)  |                          |                          |                            |
| 16-bit reload timer (4 channels)          | Operation clock frequency : $f_{sys}/2^1$ , $f_{sys}/2^3$ , $f_{sys}/2^5$ ( $f_{sys}$ = Machine clock frequency)<br>Supports External Event Count function.  |                          |                          |                            |
| 16-bit free-run timer (2 channels)        | Free-run Timer 0 (clock input FRCK0) corresponds to ICU 0/1.<br>Free-run Timer 1 (clock input FRCK1) corresponds to ICU 4/5/6/7, OCU 4/5/6/7.  |                          |                          |                            |
|   | Signals an interrupt when overflowing.<br>Supports Timer Clear when a match with Output Compare (Channel 0, 4) .<br>Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ , $f_{sys}/2^5$ , $f_{sys}/2^6$ , $f_{sys}/2^7$ ( $f_{sys}$ = Machine clock frequency) |                          |                          |                            |
| 16-bit output compare                     | 4 channels   |                          |                          |                            |
|   | Signals an interrupt when 16-bit free-run Timer matches with output compare registers.<br>A pair of compare registers can be used to generate an output signal.  |                          |                          |                            |

*(Continued)*

| Part Number<br>Parameter              | MB90F356E<br>MB90F357E   | MB90F356TE<br>MB90F357TE | MB90F356ES<br>MB90F357ES | MB90F356TES<br>MB90F357TES |
|---------------------------------------|--|--------------------------|--------------------------|----------------------------|
| 16-bit input capture                  | 6 channels<br>Retains 16-bit free-run timer value by (rising edge, falling edge or rising & falling edge), signals an interrupt.   |                          |                          |                            |
| 8/16-bit programmable pulse generator | 6 channels (16-bit)/10 channels (8-bit)<br>8-bit reload counters × 12<br>8-bit reload registers for L pulse width×12<br>8-bit reload registers for H pulse width×12<br>Supports 8-bit and 16-bit operation modes.<br>A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as 8-bit prescaler + 8-bit reload counter.<br>Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ or $128 \mu s @ f_{osc} = 4 \text{ MHz}$<br>( $f_{sys}$ = Machine clock frequency, $f_{osc}$ = Oscillation clock frequency) |                          |                          |                            |
| CAN interface                         | 1 channel<br>Conforms to CAN Specification Version 2.0 Part A and B.<br>Automatic re-transmission in case of error<br>Automatic transmission responding to Remote Frame<br>Prioritized 16 message buffers for data and ID<br>Supports multiple messages.<br>Flexible configuration of acceptance filtering :<br>Full bit compare/Full bit mask/Two partial bit masks<br>Supports up to 1 Mbps.   |                          |                          |                            |
| External interrupt                    | 8 channels<br>Can be used rising edge, falling edge, starting up by H/L level input, external interrupt, extended intelligent I/O services (EI <sup>2</sup> OS) and DMA.   |                          |                          |                            |
| D/A converter                         | —  |                          |                          |                            |
| I/O ports                             | Virtually all external pins can be used as general purpose I/O port.<br>All push-pull outputs<br>Bit-wise settable as input/output or peripheral module signal<br>Settable as CMOS schmitt trigger/ automotive inputs<br>TTL input level settable for external bus (only for external bus pin)   |                          |                          |                            |
| Flash memory                          | Supports automatic programming, Embedded Algorithm<br>Write/Erase/Erase-Suspend/Resume commands<br>A flag indicating completion of the algorithm<br>Number of erase cycles : 10000 times<br>Data retention time : 20 years<br>Boot block configuration<br>Erase can be performed on each block.<br>Block protection with external programming voltage<br>Flash Security Feature for protecting the content of the Flash (MB90F357x only)   |                          |                          |                            |
| Corresponding EVA name                | MB90V340E-104  |                          | MB90V340E-103            |                            |

\* : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.  
Please refer to the Emulator hardware manual about details.

**■ MASK ROM products/Evaluation products**

| Part Number                               | MB90356E<br>MB90357E  | MB90356TE<br>MB90357TE | MB90356ES<br>MB90357ES | MB90356TES<br>MB90357TES | MB90V340E-1<br>03  | MB90V340E-1<br>04 |
|---|---|------------------------|------------------------|--------------------------|--|-------------------|
| CPU                                       | F <sup>2</sup> MC-16LX CPU  |                        |                        |                          |  |                   |
| System clock                              | On-chip PLL clock multiplier (×1, ×2, ×3, ×4, ×6, 1/2 when PLL stops)<br>Minimum instruction execution time : 42 ns (oscillation clock 4 MHz, PLL × 6)  |                        |                        |                          |  |                   |
| ROM                                       | MASK ROM<br>64 Kbytes :MB90356E(S), MB90356TE(S)<br>128 Kbytes :MB90357E(S), MB90357TE(S)   |                        |                        |                          | External   |                   |
| RAM                                       | 4 Kbytes  |                        |                        |                          | 30 Kbytes  |                   |
| Emulator-specific power supply*           | —   |                        |                        |                          | Yes  |                   |
| Sub clock pin (X0A, X1A)                  | Yes   |                        | No                     |                          | No   | Yes               |
| Clock supervisor                          | Yes   |                        |                        |                          |  |                   |
| Low voltage/CPU operation detection reset | No  | Yes                    | No                     | Yes                      | No   |                   |
| Operating voltage range                   | 3.5 V to 5.5 V : at normal operating (not using A/D converter)<br>4.0 V to 5.5 V : at using A/D converter<br>4.5 V to 5.5 V : at using external bus   |                        |                        |                          | 5 V ± 10%  |                   |
| Operating temperature range               | -40°C to +125°C   |                        |                        |                          | —  |                   |
| Package                                   | LQFP-64   |                        |                        |                          | PGA-299  |                   |
| LIN-UART                                  | 2 channels  |                        |                        |                          | 5 channels   |                   |
|   | Wide range of baud rate settings using a dedicated baud rate generator (reload timer)<br>Special synchronous options for adapting to different synchronous serial protocols<br>LIN functionality working either as master or slave LIN device   |                        |                        |                          |  |                   |
|   | 1 channel   |                        |                        |                          | 2 channels   |                   |
| A/D converter                             | 15 channels   |                        |                        |                          | 24 channels  |                   |
|   | 10-bit or 8-bit resolution<br>Conversion time : Min 3 μs includes sample time (per one channel)   |                        |                        |                          |  |                   |
| 16-bit reload timer (4 channels)          | Operation clock frequency : $f_{sys}/2^1$ , $f_{sys}/2^3$ , $f_{sys}/2^5$ ( $f_{sys}$ = Machine clock frequency)<br>Supports External Event Count function.   |                        |                        |                          |  |                   |
| 16-bit free-run timer (2 channels)        | Free-run Timer 0 (clock input FRCK0) corresponds to ICU 0/1.<br>Free-run Timer 1 (clock input FRCK1) corresponds to ICU 4/5/6/7, OCU 4/5/6/7.   |                        |                        |                          | Free-run Timer 0 corresponds to ICU 0/1/2/3, OCU 0/1/2/3.<br>Free-run Timer 1 corresponds to ICU 4/5/6/7, OCU 4/5/6/7. |                   |
|   | Signals an interrupt when overflowing.<br>Supports Timer Clear when a match with Output Compare (Channel 0, 4).<br>Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ , $f_{sys}/2^5$ , $f_{sys}/2^6$ , $f_{sys}/2^7$ ( $f_{sys}$ = Machine clock frequency) |                        |                        |                          |  |                   |

(Continued)

(Continued)

| Part Number<br>Parameter              | MB90356E<br>MB90357E  | MB90356TE<br>MB90357TE | MB90356ES<br>MB90357ES | MB90356TES<br>MB90357TES | MB90V340E-1<br>03   | MB90V340E-1<br>04 |
|---------------------------------------|---|------------------------|------------------------|--------------------------|---|-------------------|
| 16-bit output compare                 | 4 channels  |                        |                        |                          | 8 channels  |                   |
|                                       | Signals an interrupt when 16-bit free-run Timer matches with output compare registers.<br>A pair of compare registers can be used to generate an output signal.   |                        |                        |                          |   |                   |
| 16-bit input capture                  | 6 channels  |                        |                        |                          | 8 channels  |                   |
|                                       | Retains 16-bit free-run timer value by (rising edge, falling edge or rising & falling edge), signals an interrupt.  |                        |                        |                          |   |                   |
| 8/16-bit programmable pulse generator | 6 channels (16-bit)/10 channels (8-bit)<br>8-bit reload counters×12<br>8-bit reload registers for L pulse width × 12<br>8-bit reload registers for H pulse width × 12   |                        |                        |                          | 8 channels (16-bit)/<br>16 channels (8-bit)<br>8-bit reload counters×16<br>8-bit reload registers for<br>L pulse width×16<br>8-bit reload registers for<br>H pulse width×16 |                   |
|                                       | Supports 8-bit and 16-bit operation modes.<br>A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as 8-bit prescaler + 8-bit reload counter.<br>Operation clock frequency : $f_{sys}$ , $f_{sys}/2^1$ , $f_{sys}/2^2$ , $f_{sys}/2^3$ , $f_{sys}/2^4$ or $128 \mu s @ f_{osc} = 4 \text{ MHz}$<br>( $f_{sys}$ = Machine clock frequency, $f_{osc}$ = Oscillation clock frequency) |                        |                        |                          |   |                   |
| CAN interface                         | 1 channel   |                        |                        |                          | 3 channels  |                   |
|                                       | Conforms to CAN Specification Version 2.0 Part A and B.<br>Automatic re-transmission in case of error<br>Automatic transmission responding to Remote Frame<br>Prioritized 16 message buffers for data and ID<br>Supports multiple messages.<br>Flexible configuration of acceptance filtering :<br>Full bit compare/Full bit mask/Two partial bit masks<br>Supports up to 1 Mbps.                               |                        |                        |                          |   |                   |
| External interrupt                    | 8 channels  |                        |                        |                          | 16 channels   |                   |
|                                       | Can be used rising edge, falling edge, starting up by H/L level input, external interrupt, extended intelligent I/O services (EI <sup>2</sup> OS) and DMA.  |                        |                        |                          |   |                   |
| D/A converter                         | —   |                        |                        |                          | 2 channels  |                   |
| I/O ports                             | Virtually all external pins can be used as general purpose I/O port.<br>All push-pull outputs<br>Bit-wise settable as input/output or peripheral module signal<br>Settable as CMOS schmitt trigger/ automotive inputs<br>TTL input level settable for external bus (only for external bus pin)  |                        |                        |                          |   |                   |
| Flash memory                          | —   |                        |                        |                          |   |                   |
| Corresponding EVA name                | MB90V340E-104   |                        | MB90V340E-103          |                          | —   |                   |

\* : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.  
Please refer to the Emulator hardware manual about details.

**3. Packages and Product Correspondence**


| Package                                   | <b>MB90V340E-101</b><br><b>MB90V340E-102</b><br><b>MB90V340E-103</b><br><b>MB90V340E-104</b> | <b>MB90351E (S) , MB90351TE (S)</b><br><b>MB90F351E (S) , MB90F351TE (S)</b><br><b>MB90352E (S) , MB90352TE (S)</b><br><b>MB90F352E (S) , MB90F352TE (S)</b><br><b>MB90356E (S) , MB90356TE (S)</b><br><b>MB90F356E (S) , MB90F356TE (S)</b><br><b>MB90357E (S) , MB90357TE (S)</b><br><b>MB90F357E (S) , MB90F357TE (S)</b> |
|---|--|--|
| PGA-299C-A01                              | ○  | ×  |
| FPT-64P-M23<br>(12.0 mm □, 0.65 mm pitch) | ×  | ○  |
| FPT-64P-M24<br>(10.0 mm □, 0.50 mm pitch) | ×  | ○  |

○ : Yes, × : No

Note : Refer to “[Package Dimensions](#)” for detail of each package.

### 4. Pin Assignments

- MB90351E (S) , MB90351TE (S) , MB90F351E (S) , MB90F351TE (S) , MB90352E (S) , MB90352TE (S) , MB90F352E (S) , MB90F352TE (S) , MB90356E (S) , MB90356TE (S) , MB90F356E (S) , MB90F356TE (S) , MB90357E (S) , MB90357TE (S) , MB90F357E (S) , MB90F357TE (S)

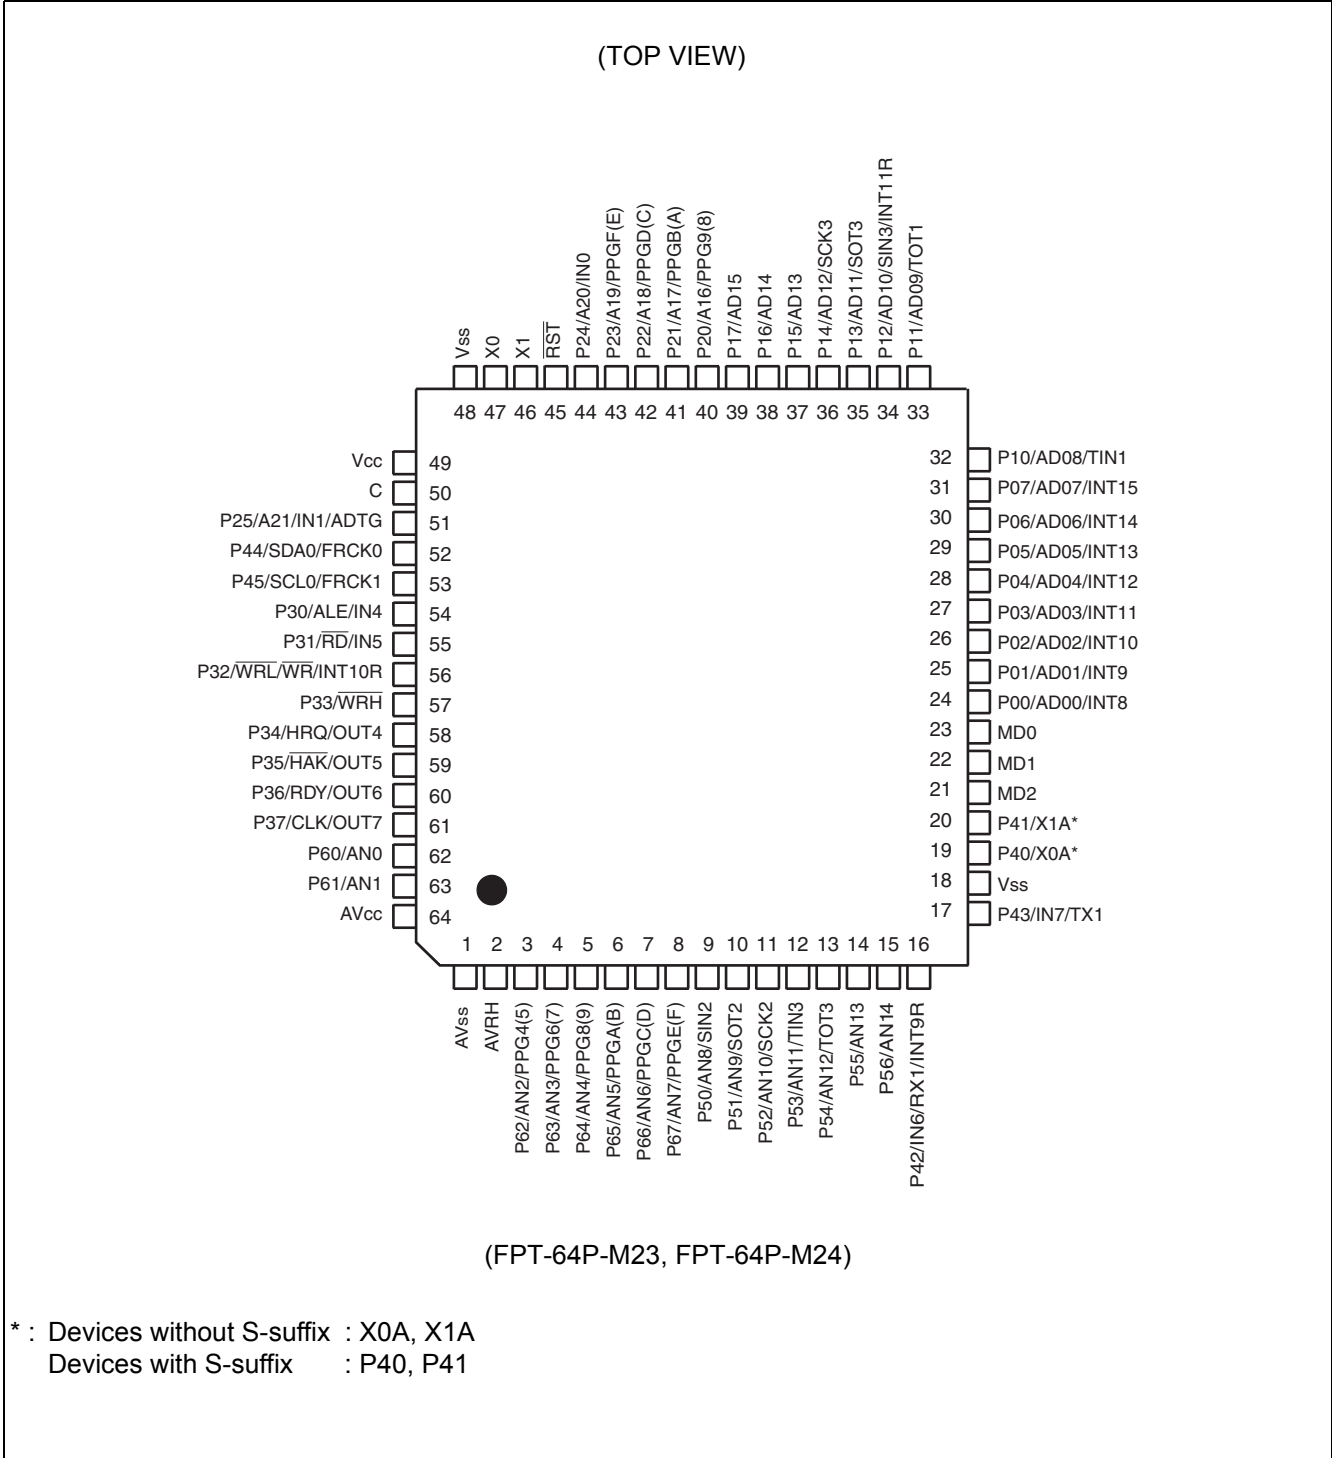

**5. Pin Description**

| Pin No. | Pin name                                    | I/O Circuit type* | Function  |
|---------|---|-------------------|---|
| 46      | X1  | A                 | Oscillation output pin  |
| 47      | X0  |                   | Oscillation input pin   |
| 45      | RST   | E                 | Reset input pin   |
| 3 to 8  | P62 to P67                                  | I                 | General purpose I/O ports   |
|         | AN2 to AN7                                  |                   | Analog input pins for A/D converter   |
|         | PPG4 (5), 6 (7), 8 (9), A (B), C (D), E (F) |                   | Output pins for PPGs  |
| 9       | P50   | O                 | General purpose I/O port  |
|         | AN8   |                   | Analog input pin for A/D converter  |
|         | SIN2  |                   | Serial data input pin for UART2   |
| 10      | P51   | I                 | General purpose I/O port  |
|         | AN9   |                   | Analog input pin for A/D converter  |
|         | SOT2  |                   | Serial data output pin for UART2  |
| 11      | P52   | I                 | General purpose I/O port  |
|         | AN10  |                   | Analog input pin for A/D converter  |
|         | SCK2  |                   | Serial clock I/O pin for UART2  |
| 12      | P53   | I                 | General purpose I/O port  |
|         | AN11  |                   | Analog input pin for A/D converter  |
|         | TIN3  |                   | Event input pin for reload timer3   |
| 13      | P54   | I                 | General purpose I/O port  |
|         | AN12  |                   | Analog input pin for A/D converter  |
|         | TOT3  |                   | Output pin for reload timer3  |
| 14, 15  | P55, P56                                    | I                 | General purpose I/O ports   |
|         | AN13, AN14                                  |                   | Analog input pins for A/D converter   |
| 16      | P42   | F                 | General purpose I/O port  |
|         | IN6   |                   | Data sample input pin for input capture ICU6  |
|         | RX1   |                   | RX input pin for CAN1   |
|         | INT9R                                       |                   | External interrupt request input pin for INT9   |
| 17      | P43   | F                 | General purpose I/O port  |
|         | IN7   |                   | Data sample input pin for input capture ICU7  |
|         | TX1   |                   | TX output pin for CAN1  |
| 19, 20  | P40, P41                                    | F                 | General purpose I/O ports<br>(devices with S-suffix and MB90V340E-101/103)  |
|         | X0A, X1A                                    | B                 | X0A : Oscillation input pin for sub clock<br>X1A : Oscillation output pin for sub clock<br>(devices without S-suffix and MB90V340E-102/104) |

*(Continued)*



| Pin No.  | Pin name      | I/O Circuit type* | Function  |
|----------|---------------|-------------------|---|
| 24 to 31 | P00 to P07    | G                 | General purpose I/O ports. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode. |
|          | AD00 to AD07  |                   | Input/output pins of external address data bus lower 8 bits. This function is enabled when the external bus is enabled.                       |
|          | INT8 to INT15 |                   | External interrupt request input pins for INT8 to INT15   |
| 32       | P10           | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.  |
|          | AD08          |                   | Input/output pin for external bus address data bus bit 8. This function is enabled when external bus is enabled.                              |
|          | TIN1          |                   | Event input pin for reload timer1   |
| 33       | P11           | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.  |
|          | AD09          |                   | Input/output pin for external bus address data bus bit 9. This function is enabled when external bus is enabled.                              |
|          | TOT1          |                   | Output pin for reload timer1  |
| 34       | P12           | N                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.  |
|          | AD10          |                   | Input/output pin for external bus address data bus bit 10. This function is enabled when external bus is enabled.                             |
|          | SIN3          |                   | Serial data input pin for UART3   |
|          | INT11R        |                   | External interrupt request input pin for INT11  |
| 35       | P13           | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.  |
|          | AD11          |                   | Input/output pin for external bus address data bus bit 11. This function is enabled when external bus is enabled.                             |
|          | SOT3          |                   | Serial data output pin for UART3  |
| 36       | P14           | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.  |
|          | AD12          |                   | Input/output pin for external bus address data bus bit 12. This function is enabled when external bus is enabled.                             |
|          | SCK3          |                   | Clock input/output pin for UART3  |
| 37       | P15           | N                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.  |
|          | AD13          |                   | Input/output pin for external bus address data bus bit 13. This function is enabled when external bus is enabled.                             |
| 38       | P16           | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.  |
|          | AD14          |                   | Input/output pin for external bus address data bus bit 14. This function is enabled when external bus is enabled.                             |

(Continued)

| Pin No.  | Pin name                                     | I/O Circuit type* | Function   |
|----------|--|-------------------|--|
| 39       | P17  | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.   |
|          | AD15   |                   | Input/output pin for external bus address data bus bit 15. This function is enabled when external bus is enabled.  |
| 40 to 43 | P20 to P23                                   | G                 | General purpose I/O ports. The register can be set to select whether to use a pull-up resistor. In external bus mode, the pins are enabled as a general-purpose I/O port when the corresponding bit in the external address output control register (HACR) is 1. |
|          | A16 to A19                                   |                   | Output pins for A16 to A19 of the external address data bus. When the corresponding bit in the external address output control register (HACR) is 0, the pins are enabled as high address output pins A16 to A19.  |
|          | PPG9 (8)<br>PPGB (A)<br>PPGD (C)<br>PPGF (E) |                   | Output pins for PPGs   |
| 44       | P24  | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. In external bus mode, the pin is enabled as a general-purpose I/O port when the corresponding bit in the external address output control register (HACR) is 1.    |
|          | A20  |                   | Output pin for A20 of the external address data bus. When the corresponding bit in the external address output control register (HACR) is 0, the pin is enabled as high address output pin A20.  |
|          | IN0  |                   | Data sample input pin for input capture ICU0   |
| 51       | P25  | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. In external bus mode, the pin is enabled as a general-purpose I/O port when the corresponding bit in the external address output control register (HACR) is 1.    |
|          | A21  |                   | Output pin for A21 of the external address data bus. When the corresponding bit in the external address output control register (HACR) is 0, the pin is enabled as high address output pin A21.  |
|          | IN1  |                   | Data sample input pin for input capture ICU1   |
|          | ADTG   |                   | Trigger input pin for A/D converter  |
| 52       | P44  | H                 | General purpose I/O port   |
|          | SDA0   |                   | Serial data I/O pin for I <sup>2</sup> C 0   |
|          | FRCK0  |                   | Input pin for the 16-bit Free-run Timer 0  |
| 53       | P45  | H                 | General purpose I/O port   |
|          | SCL0   |                   | Serial clock I/O pin for I <sup>2</sup> C 0  |
|          | FRCK1  |                   | Input pin for the 16-bit Free-run Timer 1  |

(Continued)

| Pin No. | Pin name                   | I/O Circuit type* | Function   |
|---------|----------------------------|-------------------|--|
| 54      | P30                        | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.   |
|         | ALE                        |                   | Address latch enable output pin. This function is enabled when external bus is enabled.  |
|         | IN4                        |                   | Data sample input pin for input capture ICU4   |
| 55      | P31                        | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.   |
|         | $\overline{\text{RD}}$     |                   | Read strobe output pin for data bus. This function is enabled when external bus is enabled.  |
|         | IN5                        |                   | Data sample input pin for input capture ICU5   |
| 56      | P32                        | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the $\overline{\text{WR/WRL}}$ pin output disabled.   |
|         | $\overline{\text{WR/WRL}}$ |                   | Write strobe output pin for the data bus. This function is enabled when both the external bus and the $\overline{\text{WR/WRL}}$ pin output are enabled. $\overline{\text{WRL}}$ is used to write-strobe 8 lower bits of the data bus in 16-bit access. $\overline{\text{WR}}$ is used to write-strobe 8 bits of the data bus in 8-bit access. |
|         | INT10R                     |                   | External interrupt request input pin for INT10   |
| 57      | P33                        | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode, in external bus 8-bit mode or with the $\overline{\text{WRH}}$ pin output disabled.  |
|         | $\overline{\text{WRH}}$    |                   | Write strobe output pin for the 8 higher bits of the data bus. This function is enabled when the external bus is enabled, when the external bus 16-bit mode is selected, and when the $\overline{\text{WRH}}$ output pin is enabled.   |
| 58      | P34                        | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the hold function disabled.   |
|         | HRQ                        |                   | Hold request input pin. This function is enabled when both the external bus and the hold function are enabled.   |
|         | OUT4                       |                   | Wave form output pin for output compare OCU4   |
| 59      | P35                        | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the hold function disabled.   |
|         | $\overline{\text{HAK}}$    |                   | Hold acknowledge output pin. This function is enabled when both the external bus and the hold function are enabled.  |
|         | OUT5                       |                   | Wave form output pin for output compare OCU5   |
| 60      | P36                        | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the external ready function disabled.   |
|         | RDY                        |                   | Ready input pin. This function is enabled when both the external bus and the external ready function are enabled.  |
|         | OUT6                       |                   | Wave form output pin for output compare OCU6   |






(Continued)

(Continued)




| Pin No. | Pin name         | I/O Circuit type* | Function  |
|---------|------------------|-------------------|---|
| 61      | P37              | G                 | General purpose I/O port. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the CLK output disabled. |
|         | CLK              |                   | CLK output pin. This function is enabled when both the external bus and CLK output are enabled.   |
|         | OUT7             |                   | Wave form output pin for output compare OCU7  |
| 62, 63  | P60, P61         | I                 | General purpose I/O ports   |
|         | AN0, AN1         |                   | Analog input pins for A/D converter   |
| 64      | AV <sub>CC</sub> | K                 | V <sub>CC</sub> power input pin for analog circuits   |
| 2       | AVRH             | L                 | Reference voltage input for the A/D converter. This power supply must be turned on or off while a voltage higher than or equal to AVRH is applied to AV <sub>CC</sub> .             |
| 1       | AV <sub>SS</sub> | K                 | V <sub>SS</sub> power input pin for analog circuits   |
| 22, 23  | MD1, MD0         | C                 | Input pins for specifying the operating mode  |
| 21      | MD2              | D                 | Input pin for specifying the operating mode   |
| 49      | V <sub>CC</sub>  | —                 | Power (3.5 V to 5.5 V) input pin  |
| 18, 48  | V <sub>SS</sub>  | —                 | Power (0 V) input pins  |
| 50      | C                | K                 | This is the power supply stabilization capacitor pin. It should be connected to a higher than or equal to 0.1 μF ceramic capacitor.   |

\* : For the I/O circuit type, refer to "I/O Circuit Type".




**6. I/O Circuit Type**
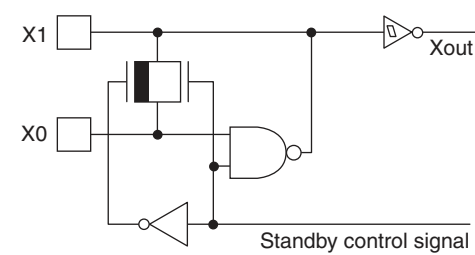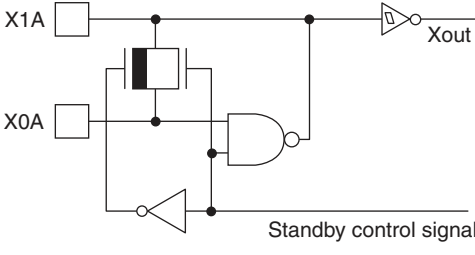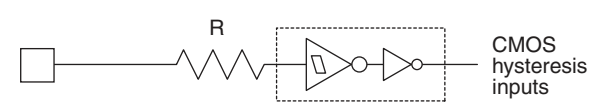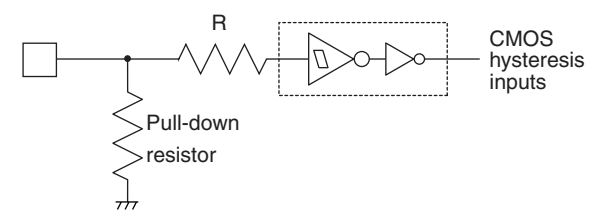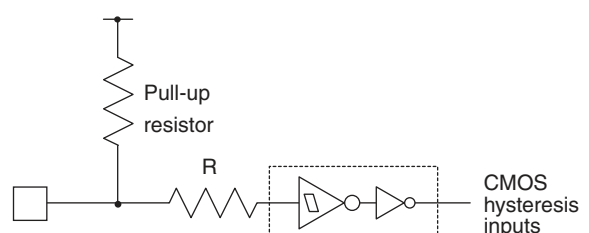
| Type | Circuit   | Remarks  |
|------|---|--|
| A    |    | Oscillation circuit<br>High-speed oscillation feedback resistor = approx. 1 M $\Omega$   |
| B    |   | Oscillation circuit<br>Low-speed oscillation feedback resistor = approx. 10 M $\Omega$   |
| C    |  | <ul style="list-style-type: none"> <li>■ MASK ROM device<br/>CMOS hysteresis input pin</li> <li>■ Flash memory device<br/>CMOS input pin</li> </ul>  |
| D    |  | <ul style="list-style-type: none"> <li>■ MASK ROM device<br/>CMOS hysteresis input pin<br/>Pull-down resistor value: approx. 50 k<math>\Omega</math></li> <li>■ Flash memory device<br/>CMOS input pin<br/>No Pull-down</li> </ul> |
| E    |  | CMOS hysteresis input pin<br>Pull-up resistor value: approx. 50 k $\Omega$   |

*(Continued)*

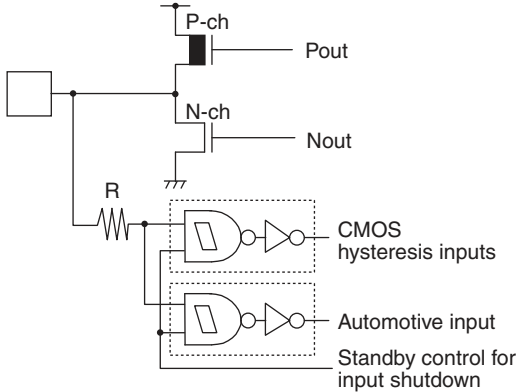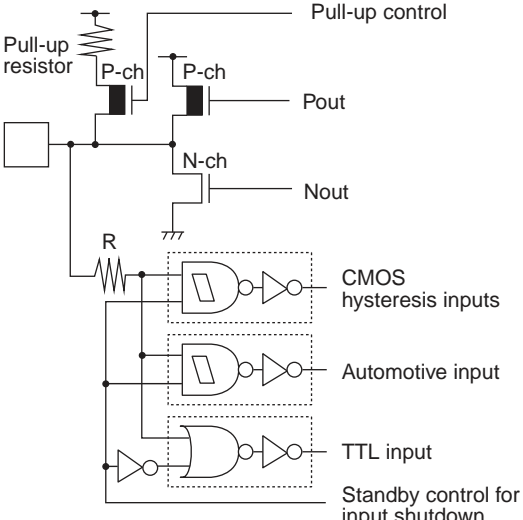
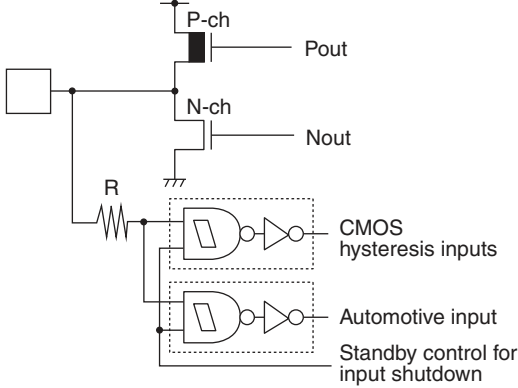
| Type | Circuit   | Remarks  |
|------|---|--|
| F    |    | <ul style="list-style-type: none"> <li>■ CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>■ CMOS hysteresis inputs (With input shutdown function when is standby)</li> <li>■ Automotive input (With the standby-time input shutdown function)</li> </ul>   |
| G    |   | <ul style="list-style-type: none"> <li>■ CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>■ CMOS hysteresis inputs (With the standby-time input shutdown function)</li> <li>■ Automotive input (With the standby-time input shutdown function)</li> <li>■ TTL input (With the standby-time input shutdown function)</li> <li>■ Programmable pull-up resistor: approx. <math>50 \text{ k}\Omega</math></li> </ul> |
| H    |  | <ul style="list-style-type: none"> <li>■ CMOS level output (<math>I_{OL} = 3 \text{ mA}</math>, <math>I_{OH} = -3 \text{ mA}</math>)</li> <li>■ CMOS hysteresis inputs (With the standby-time input shutdown function)</li> <li>■ Automotive input (With the standby-time input shutdown function)</li> </ul>  |

(Continued)
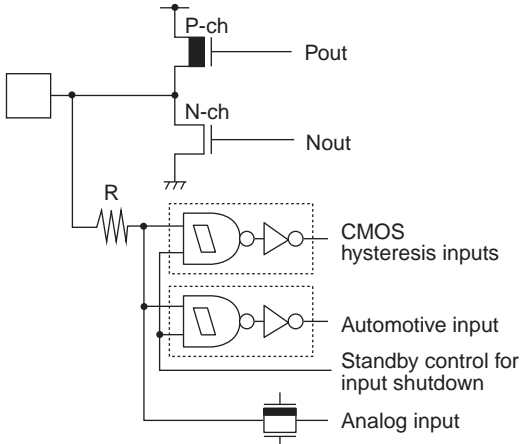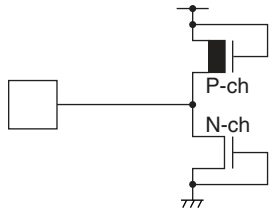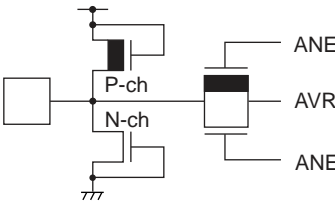
| Type | Circuit   | Remarks   |
|------|---|---|
| I    |    | <ul style="list-style-type: none"> <li>■ CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>■ CMOS hysteresis inputs (With the standby-time input shutdown function)</li> <li>■ Automotive input (With the standby-time input shutdown function)</li> <li>■ Analog input for A/D converter</li> </ul> |
| K    |   | <p>Protection circuit for power supply input</p>  |
| L    |  | <ul style="list-style-type: none"> <li>■ With the protection circuit of A/D converter reference voltage power input pin</li> <li>■ Flash memory devices do not have a protection circuit against <math>V_{CC}</math> for pin AVRH.</li> </ul>   |

(Continued)

(Continued)
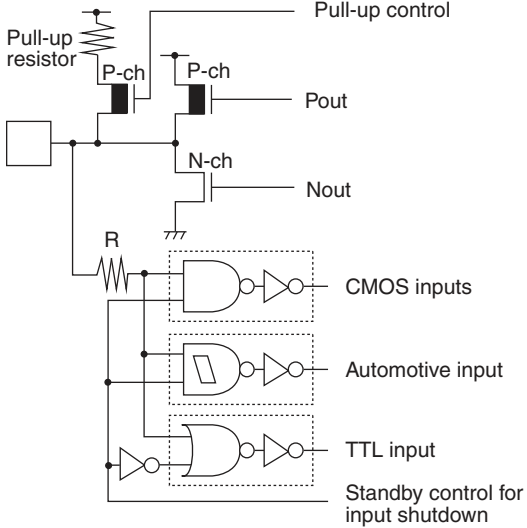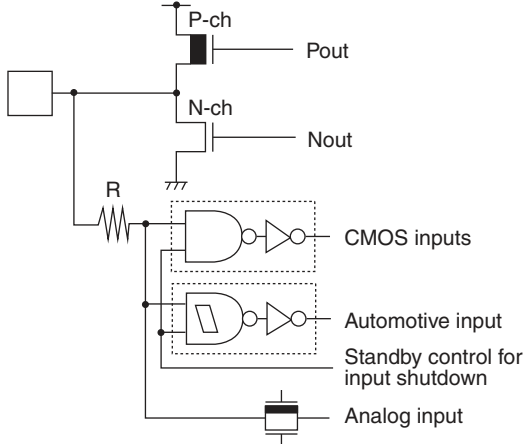
| Type | Circuit  | Remarks   |
|------|--|---|
| N    |  <p>           Pull-up resistor<br/>           P-ch<br/>           P-ch<br/>           Pout<br/>           N-ch<br/>           Nout<br/>           R<br/>           CMOS inputs<br/>           Automotive input<br/>           TTL input<br/>           Standby control for input shutdown         </p> | <ul style="list-style-type: none"> <li>■ CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>■ CMOS inputs (With the standby-time input shutdown function)</li> <li>■ Automotive input (With the standby-time input shutdown function)</li> <li>■ TTL input (With the standby-time input shutdown function)</li> <li>■ Programmable pull-up resistor: approx. <math>50 \text{ k}\Omega</math></li> </ul> |
| O    |  <p>           P-ch<br/>           Pout<br/>           N-ch<br/>           Nout<br/>           R<br/>           CMOS inputs<br/>           Automotive input<br/>           Standby control for input shutdown<br/>           Analog input         </p>   | <ul style="list-style-type: none"> <li>■ CMOS level output (<math>I_{OL} = 4 \text{ mA}</math>, <math>I_{OH} = -4 \text{ mA}</math>)</li> <li>■ CMOS inputs (With the standby-time input shutdown function)</li> <li>■ Automotive input (With the standby-time input shutdown function)</li> <li>■ Analog input for A/D converter</li> </ul>  |

## 7. Handling Devices

### 1. Preventing latch-up

**CMOS IC may suffer latch-up under the following conditions :**

- A voltage higher than  $V_{CC}$  or lower than  $V_{SS}$  is applied to an input or output pin.
- A voltage higher than the rated voltage is applied between  $V_{CC}$  and  $V_{SS}$  pins.
- The  $AV_{CC}$  power supply is applied before the  $V_{CC}$  voltage.

Latch-up may increase the power supply current drastically, causing thermal damage to the device.

For the same reason, also be careful not to let the analog power-supply voltage ( $AV_{CC}$ ,  $AVRH$ ) exceed the digital power-supply voltage ( $V_{CC}$ ).

### 2. Treatment of unused pins


Leaving unused input pins open may result in misbehavior or latch up and possible permanent damage of the device. Therefore they must be pulled up or pulled down through resistors. In this case those resistors should be more than  $2 \text{ k}\Omega$ .

Unused I/O pins should be set to the output state and can be left open, or the input state with the above described connection.



### 3. Using external clock

To use external clock, drive the X0 pin and leave X1 pin open.

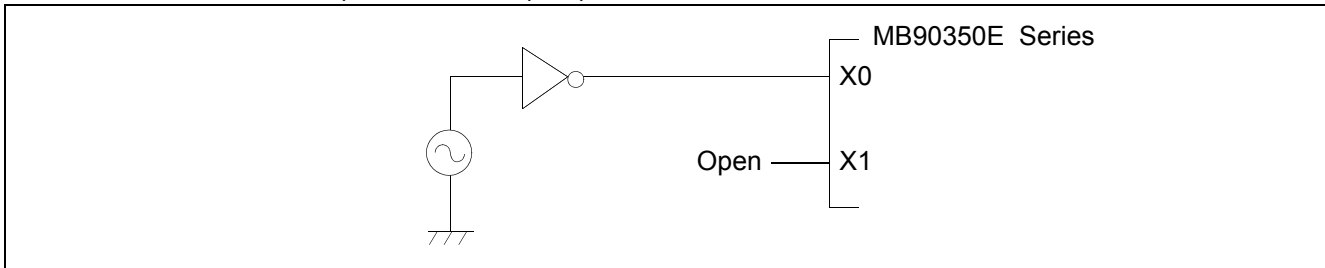

### 4. Precautions for when not using a sub clock signal


X0A and X1A are oscillation pins for sub clock. If you do not connect pins X0A and X1A to an oscillator, use pull-down handling on the X0A pin, and leave the X1A pin open.

### 5. Notes on during operation of PLL clock mode

On this microcontroller, if in case the crystal oscillator breaks off or an external reference clock input stops while the PLL clock mode is selected, a self-oscillator circuit contained in the PLL may continue its operation at its self-running frequency. However, Cypress will not guarantee results of operations if such failure occurs.

### 6. Treatment of Power Supply Pins ( $V_{CC}/V_{SS}$ )

- If there are multiple  $V_{CC}$  and  $V_{SS}$  pins, from the point of view of device design, pins to be of the same potential are connected inside of the device to prevent malfunction such as latch-up.  
To reduce unnecessary radiation, prevent malfunctioning of the strobe signal due to the rise of ground level, and observe the standard for total output current, be sure to connect the  $V_{CC}$  and  $V_{SS}$  pins to the power supply and ground externally.  
Connect  $V_{CC}$  and  $V_{SS}$  pins to the device from the current supply source at a possibly low impedance.
- As a measure against power supply noise, it is recommended to connect a capacitor of about 0.1  $\mu\text{F}$  as a bypass capacitor between  $V_{CC}$  and  $V_{SS}$  pins in the vicinity of  $V_{CC}$  and  $V_{SS}$  pins of the device.

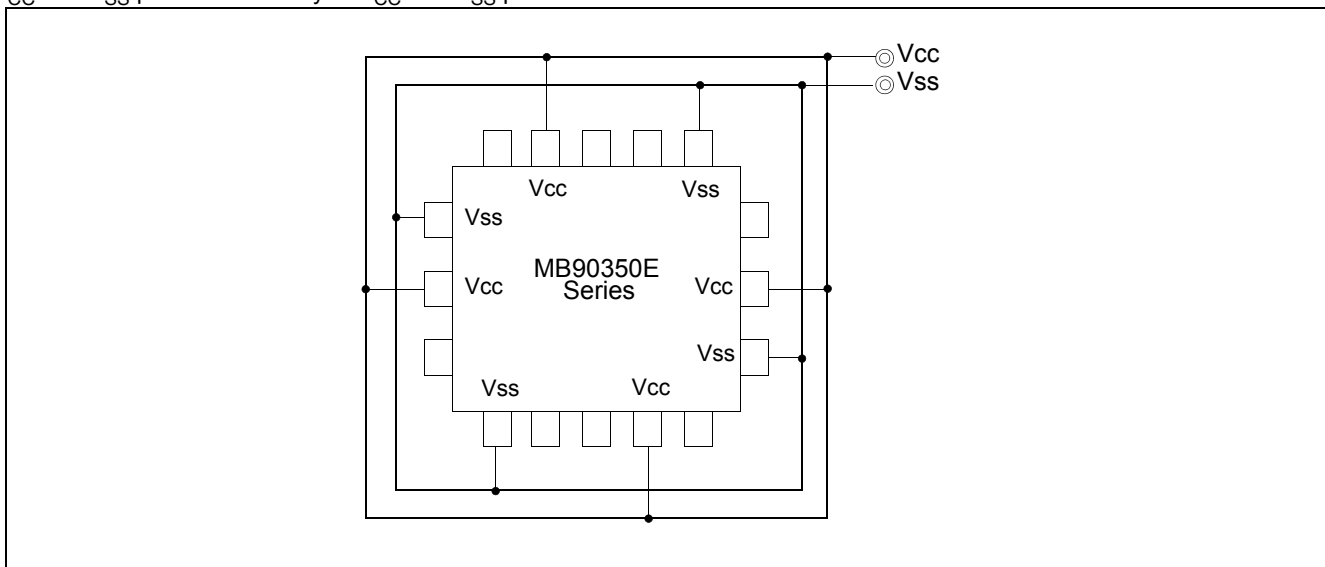

### 7. Pull-up/down resistors

The MB90350E series does not support internal pull-up/down resistors (Port 0 to Port 3: built-in pull-up resistors). Use external components where needed.

### 8. Crystal oscillator circuit

Noise around the X0/X1, or X0A/X1A pins may cause this device to operate abnormally. In the interest of stable operation it is strongly recommended that printed circuit artwork places ground bypass capacitors as close as possible to the X0/X1, X0A/X1A and crystal oscillator (or ceramic oscillator) and that oscillator lines do not cross the lines of other circuits.

Please ask each crystal maker to evaluate the oscillational characteristics of the crystal and this device.

**9. Turning-on sequence of power supply to A/D converter and analog inputs**

Make sure to turn on the A/D converter power supply ( $AV_{CC}$ , AVRH) and analog inputs (AN0 to AN14) after turning-on the digital power supply ( $V_{CC}$ ). Turn-off the digital power after turning off the A/D converter power supply and analog inputs. In this case, make sure that the power supply voltage does not exceed the rated voltage of the A/D converter (turning on/of the analog and digital power supplies simultaneously is acceptable).

**10. Connection of unused pins of A/D converter if A/D converter is not used**

Connect unused pins of A/D converter to  $AV_{CC} = V_{CC}$ ,  $AV_{SS} = AVRH = V_{SS}$ .

**11. Notes on energization**

To prevent the internal regulator circuit from malfunctioning, set the voltage rise time during energization at 50  $\mu$ s or more (0.2 V to 2.7 V).

**12. Stabilization of power supply voltage**

A sudden change in the supply voltage may cause the device to malfunction even within the  $V_{CC}$  supply voltage operating range. Therefore, the  $V_{CC}$  supply voltage should be stabilized. For reference, the supply voltage should be controlled so that  $V_{CC}$  ripple variations (peak- to-peak values) at commercial frequencies (50 MHz/60 MHz) fall below 10% of the standard  $V_{CC}$  supply voltage and the coefficient of fluctuation does not exceed 0.1 V/ms at instantaneous power switching.


**13. Serial Communication**

There is a possibility to receive wrong data due to the noise or other causes on the serial communication. Therefore, design a printed circuit board so as to avoid noise.

Retransmit the data if an error occurs because of applying the checksum to the last data in consideration of receiving wrong data due to the noise.

**14. Port 0 to port 3 output during power-on (External-bus mode)**

As shown below, when power is turned on in external-bus mode, there is a possibility that output signal of Port 0 to Port 3 might be unstable regardless of reset inputs.

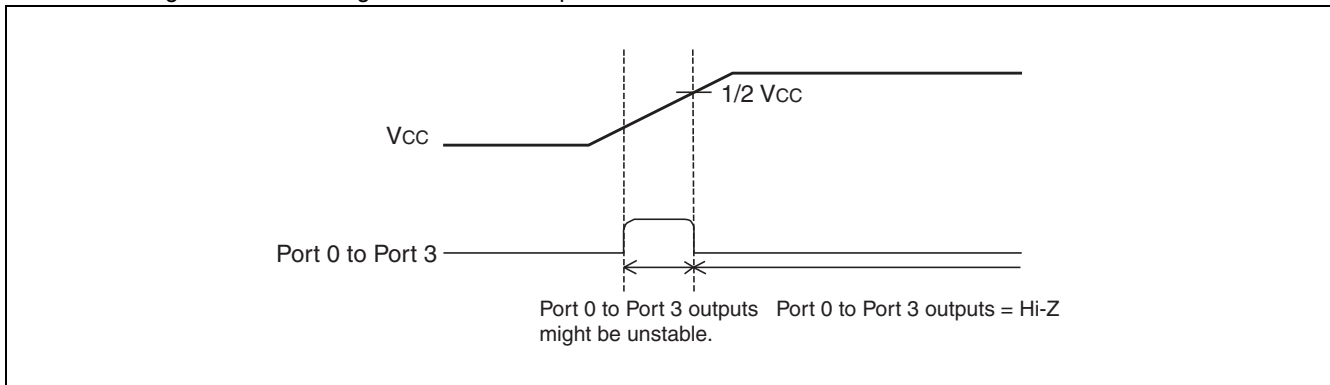

**15. Setting using CAN function**

To use CAN function, please set “1” to DIRECT bit of CAN direct mode register (CDMR).

**16. Flash security function**

The security byte is located in the area of the Flash memory. If protection code 01<sub>H</sub> is written in the security byte, the Flash memory is in the protected state by security.

Therefore please do not write 01<sub>H</sub> in this address if you do not use the security function.

Please refer to following table for the address of the security byte.

| Product name   | Flash memory size            | Address for security bit |
|--|------------------------------|--------------------------|
| MB90F352E(S)<br>MB90F352TE(S)<br>MB90F357E(S)<br>MB90F357TE(S) | Embedded 1 Mbit Flash memory | FE0001 <sub>H</sub>      |

**17. Operation with T<sub>A</sub> = +105°C or more**

If used exceeding T<sub>A</sub> = +105°C, please contact Cypress sales representatives for reliability limitations.

**18. Low voltage/CPU operation reset circuit**

The low voltage detection reset circuit is a function that monitors power supply voltage in order to detect when a voltage drops below a given voltage level. When a low voltage condition is detected, an internal reset signal is generated.

The CPU operation detection reset circuit is a 20-bit counter that uses oscillation as a count clock and generates an internal reset signal if not cleared within a given time after startup.

**(1) Low voltage detection reset circuit**

|                          |
|--------------------------|
| <b>Detection voltage</b> |
| 4.0 V ± 0.3 V            |

When a low voltage condition is detected, the low voltage detection flag (LVRC : LVRF) is set to “1” and an internal reset signal is output.

Because the low voltage detection reset circuit continues to operate even in stop mode, detection of a low voltage condition generates an internal reset and releases stop mode.

During an internal RAM write cycle, low voltage reset is generated after the completion of writing. During the output of this internal reset, the reset output from the low voltage detection reset circuit is suppressed.

**(2) CPU operation detection reset circuit**

The CPU operation detection reset circuit is a counter that prevents program runaway. The counter starts automatically after a power-on reset, and must be continually and regularly cleared within a given time. If the given time interval elapses and the counter has not been cleared, a cause such as infinite program looping is assumed and an internal reset signal is generated. The internal reset generated from the CPU operation detection circuit has a width of 5 machine cycles.

|                                |
|--------------------------------|
| <b>Interval time</b>           |
| $2^{20}/F_C$ (approx. 262 ms*) |

\* : This value assumes the interval time at an oscillation clock frequency of 4 MHz.

During recovery from standby mode, the detection period is the maximum interval plus 20  $\mu$ s.

This circuit does not operate in modes where CPU operation is stopped.

The CPU operation detection reset circuit counter is cleared under any of the following conditions.


- “0” writing to CL bit of LVRC register
- Internal reset
- Main oscillation clock stop
- Transit to sleep mode
- Transit to timebase timer mode and watch mode

**19. Internal CR oscillation circuit**


| Parameter                           | Symbol   | Value |     |     | Unit    |
|-------------------------------------|----------|-------|-----|-----|---------|
|                                     |          | Min   | Typ | Max |         |
| Oscillation frequency               | $f_{RC}$ | 50    | 100 | 200 | kHz     |
| Oscillation stabilization wait time | tstab    | —     | —   | 100 | $\mu$ s |

### 8. Block Diagrams


■ MB90V340E-101/102

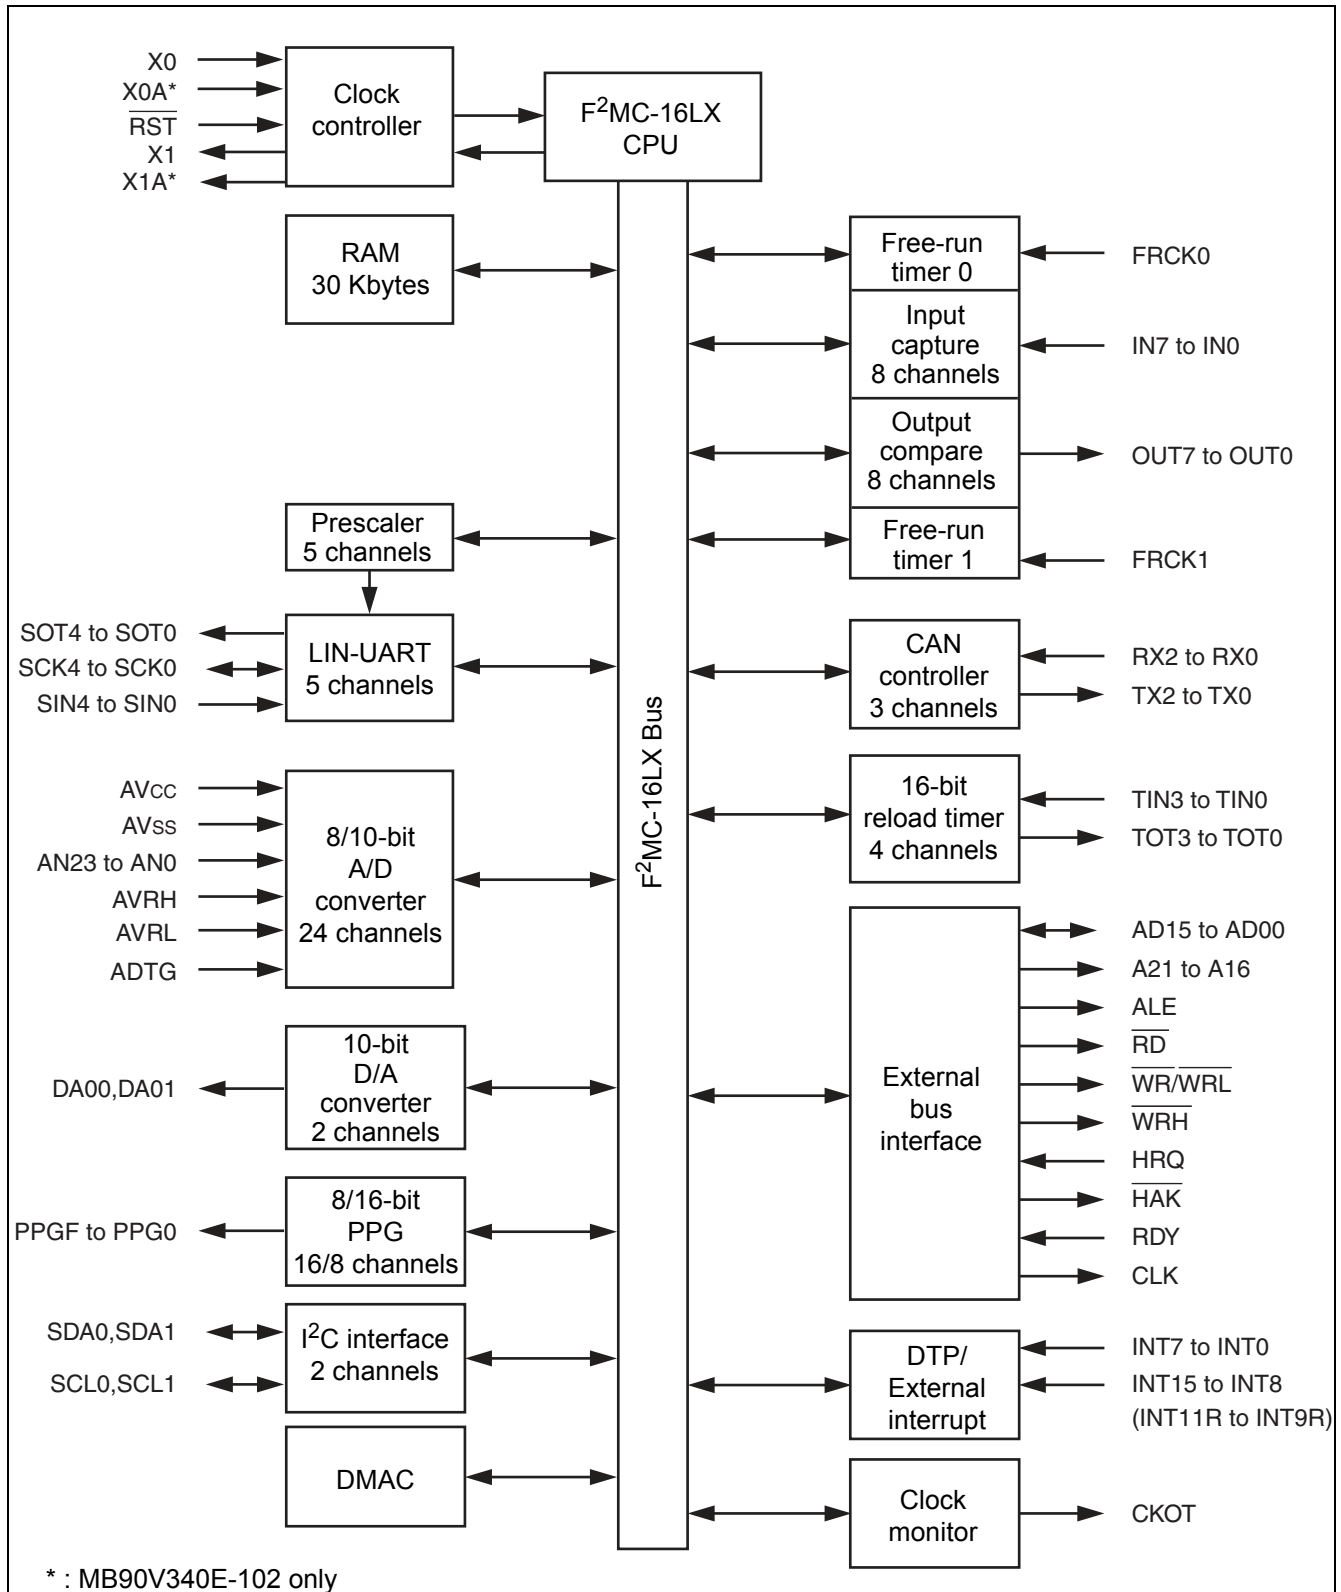


■ MB90V340E-103/104

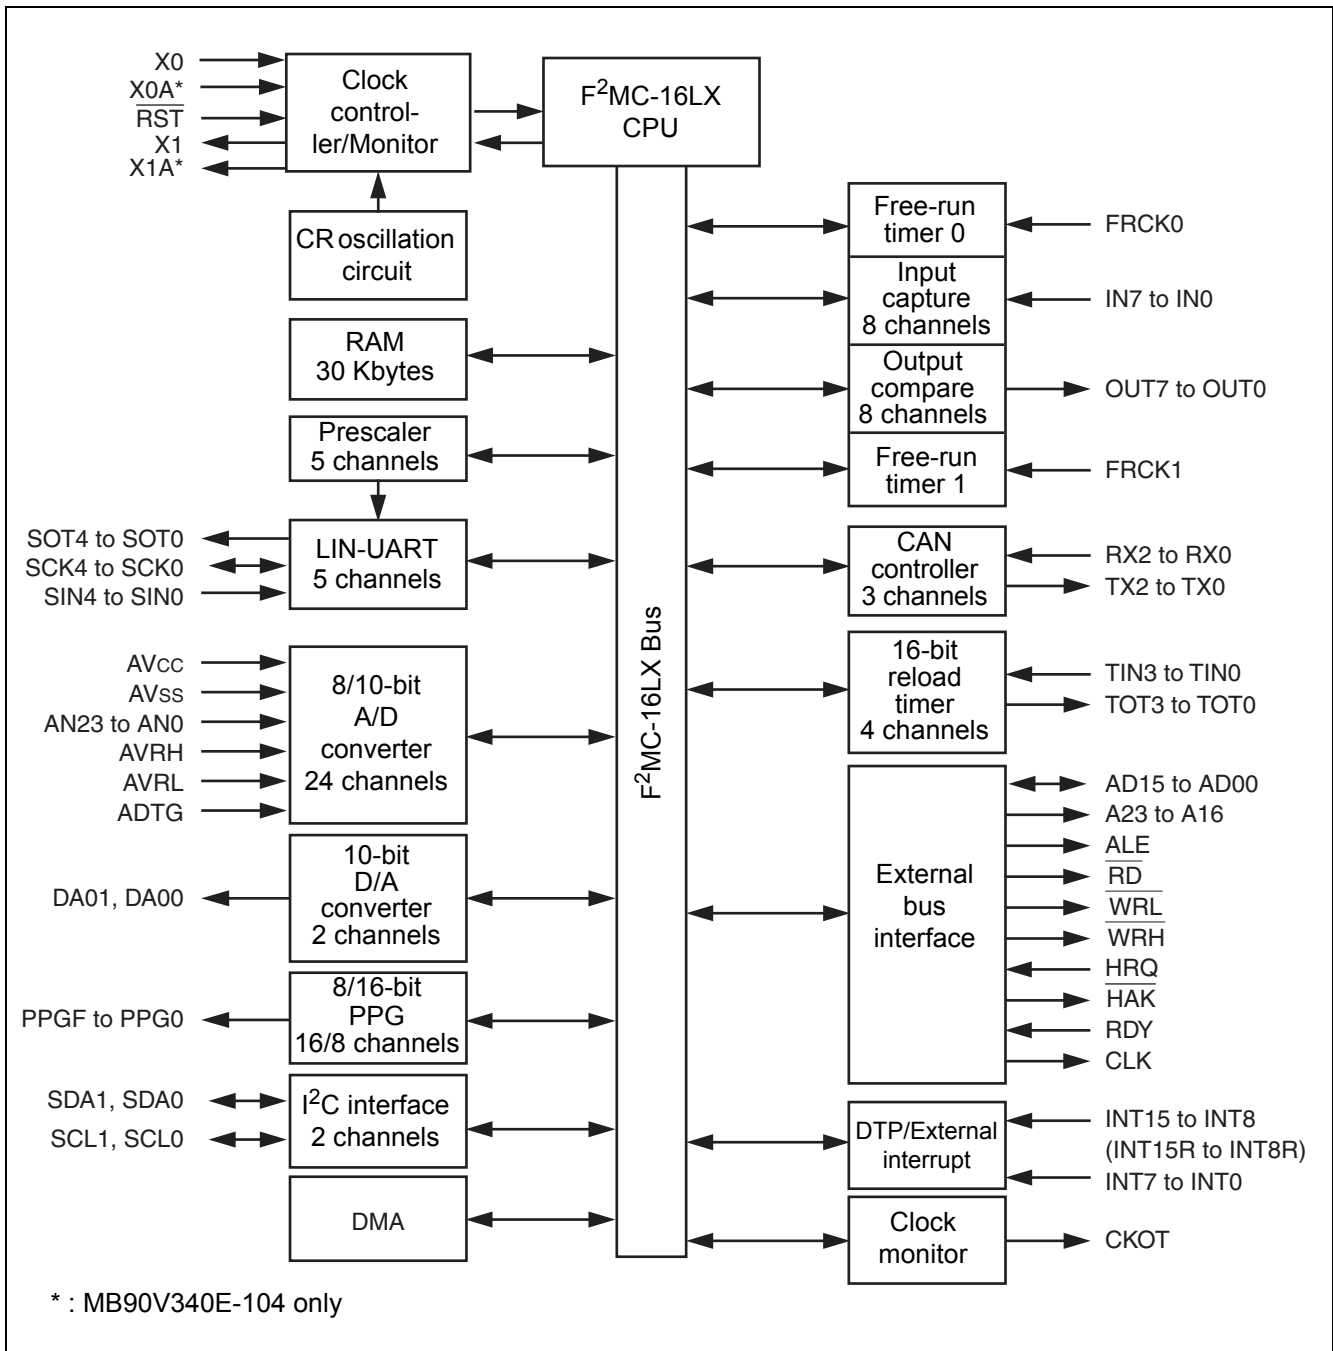

- MB90351E (S) , MB90351TE (S) , MB90F351E (S) , MB90F351TE (S) , MB90352E (S) , MB90352TE (S) , MB90F352E (S) , MB90F352TE (S)

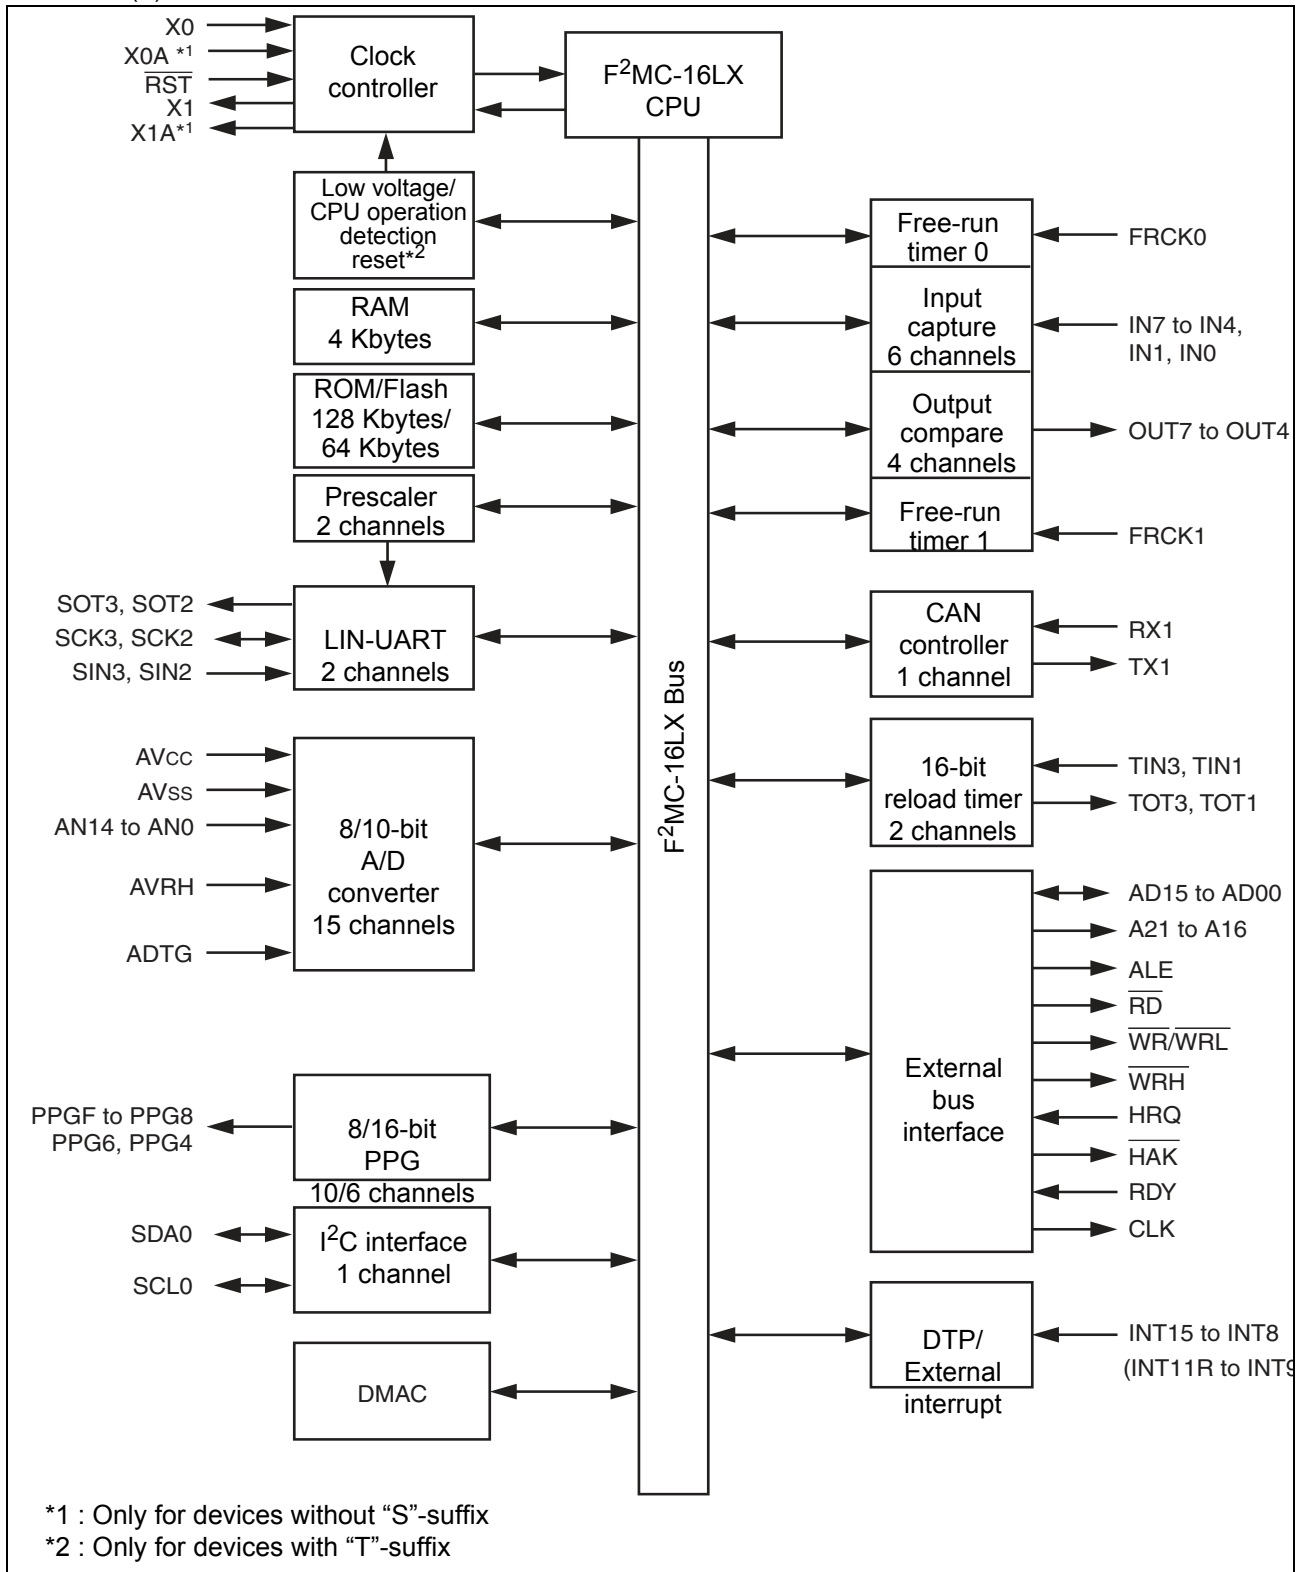


- MB90356E (S) , MB90356TE (S) , MB90F356E (S) , MB90F356TE (S) , MB90357E (S) , MB90357TE (S) , MB90F357E (S) , MB90F357TE (S)

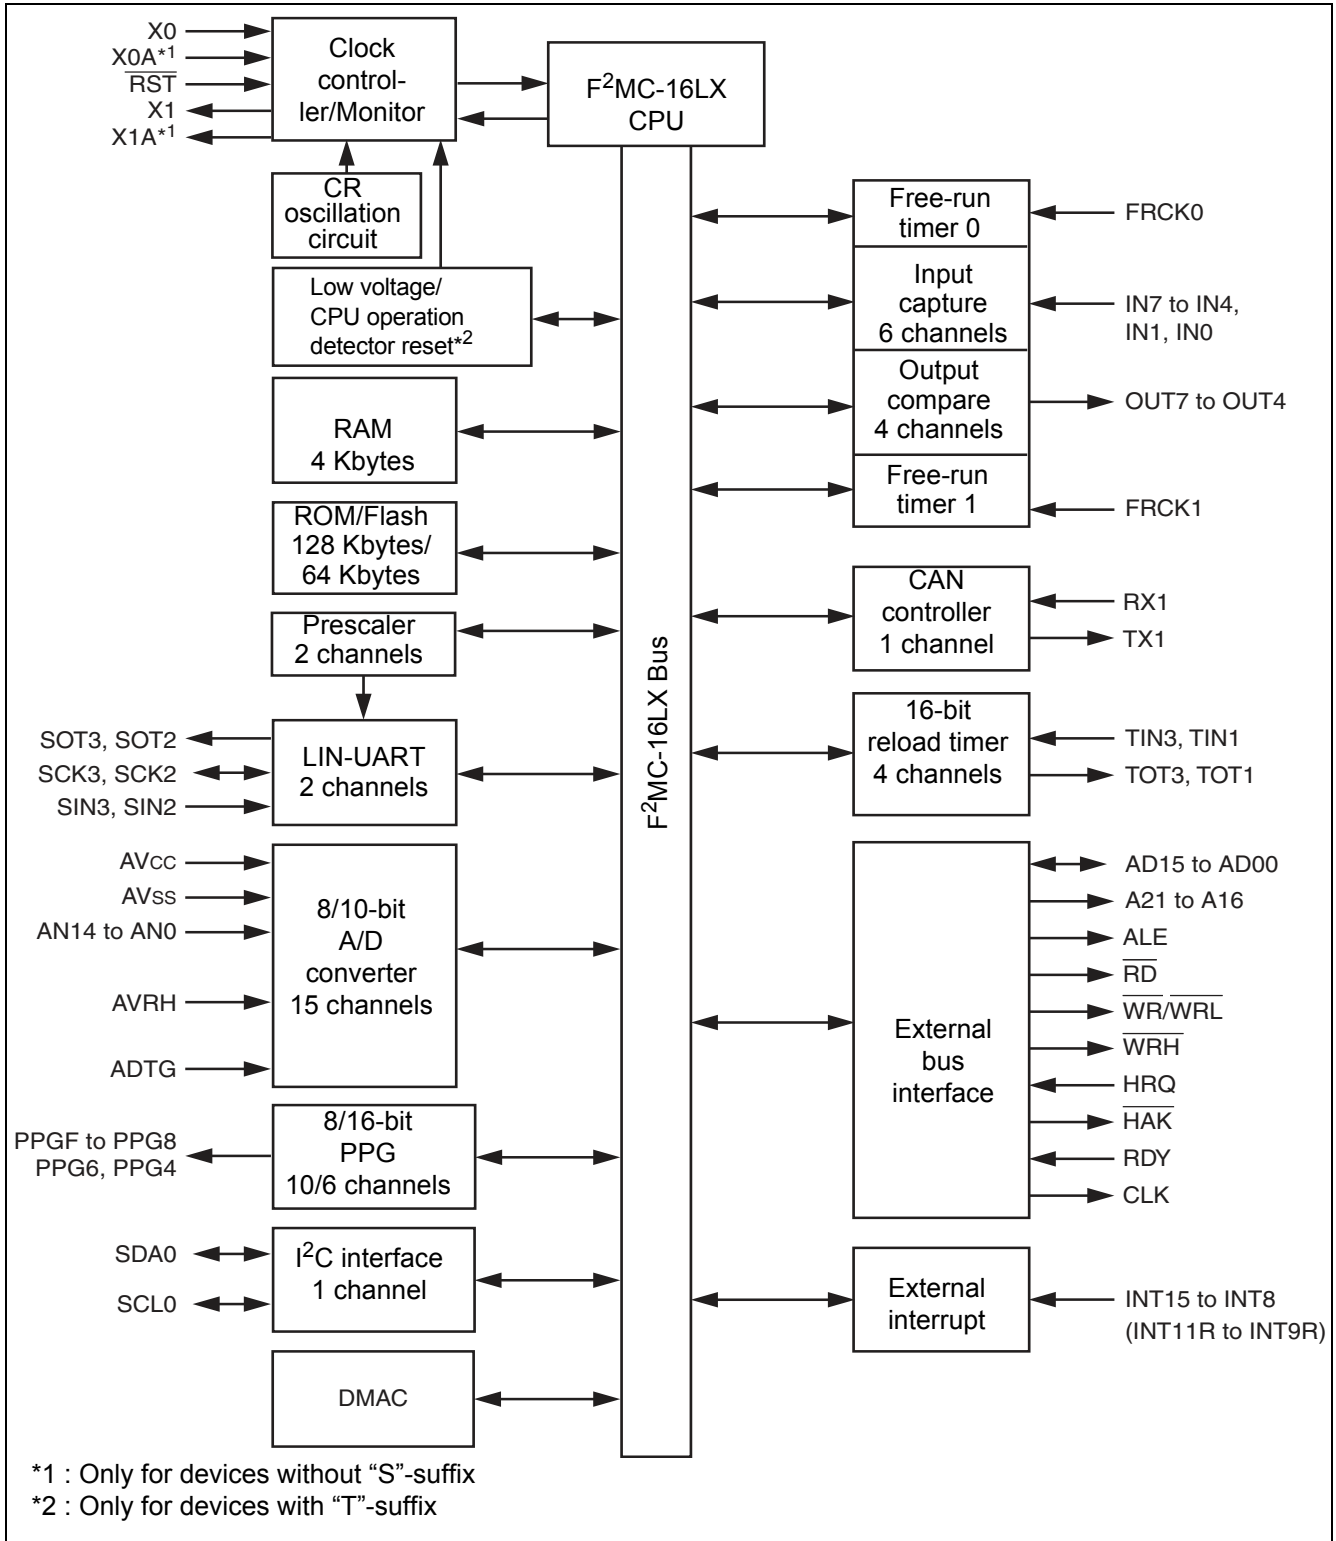



**9. Memory Map**

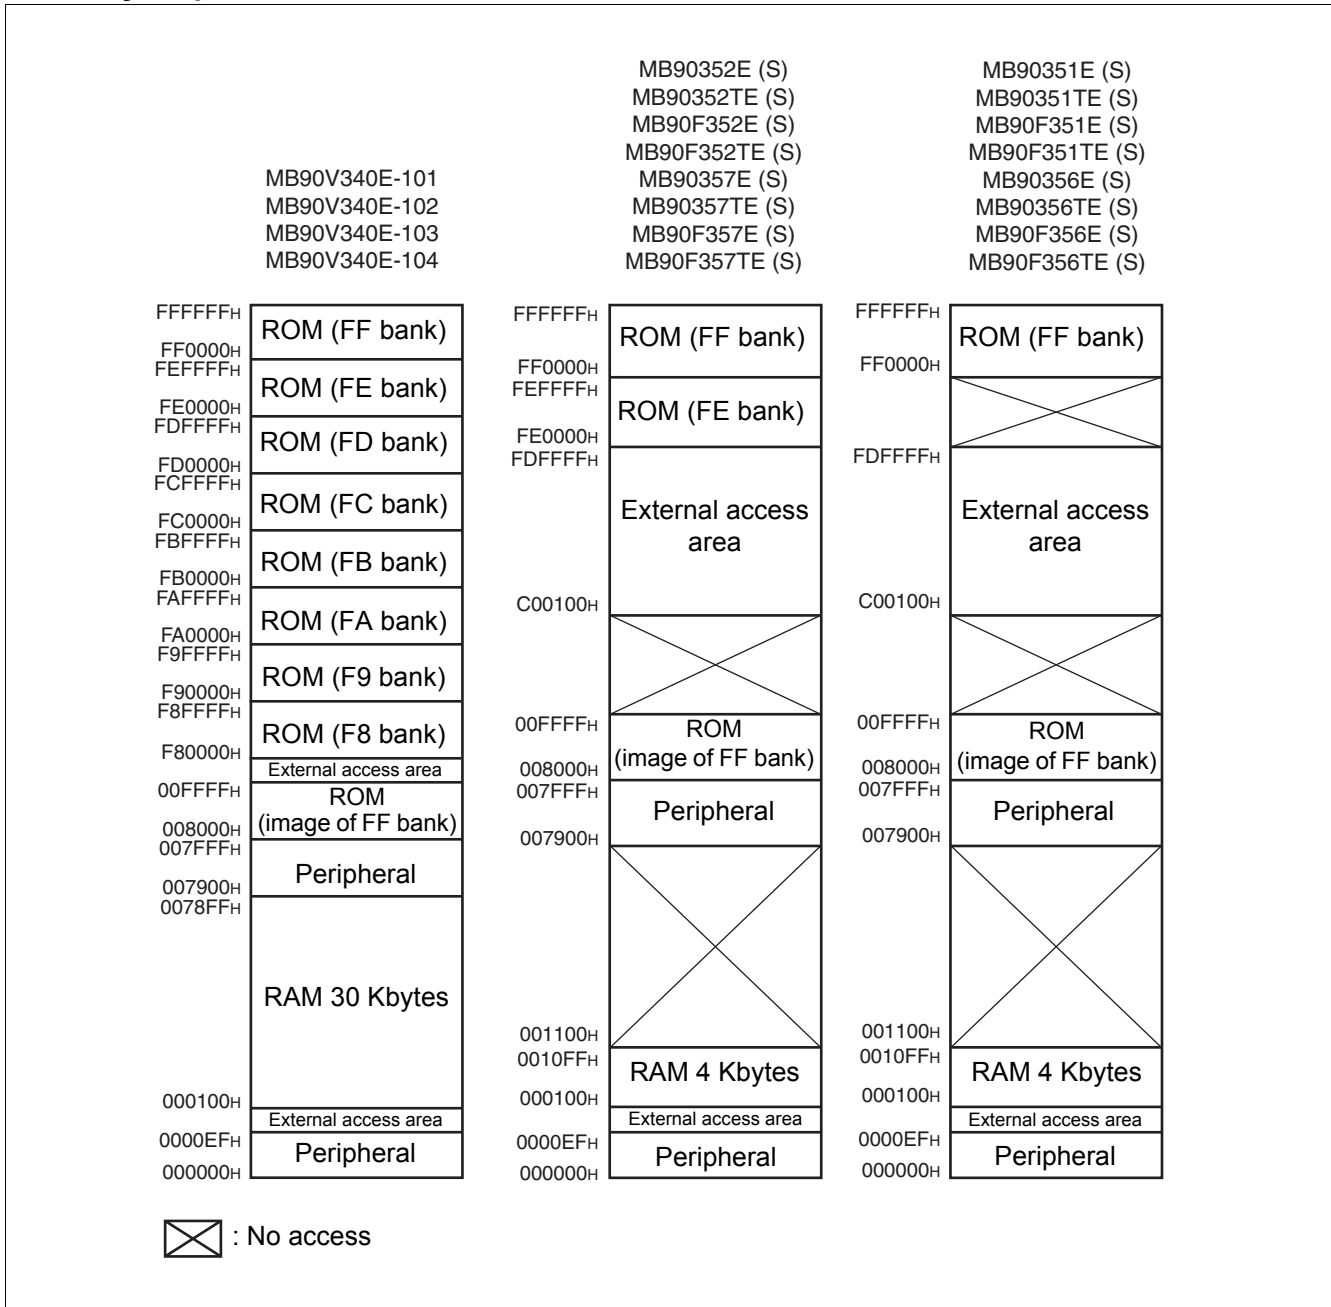

Note : The high-order portion of bank 00 gives the image of the FF bank ROM to make the small model of the C compiler effective. Since the low-order 16 bits are the same, the table in ROM can be referenced without using the far specification in the pointer declaration. For example, an attempt to access 00C000<sub>H</sub> practically accesses the value at FFC000<sub>H</sub> in ROM. The ROM area in bank FF exceeds 32 Kbytes, and its entire image cannot be shown in bank 00. The image between FF8000<sub>H</sub> and FFFFFFF<sub>H</sub> is visible in bank 00, while the image between FF0000<sub>H</sub> and FF7FFF<sub>H</sub> is visible only in bank FF.

**10. I/O Map**

| Address                                       | Register                            | Abbreviation | Access | Resource name | Initial value         |
|---|-------------------------------------|--------------|--------|---------------|-----------------------|
| 000000 <sub>H</sub>                           | Port 0 Data Register                | PDR0         | R/W    | Port 0        | XXXXXXXX <sub>B</sub> |
| 000001 <sub>H</sub>                           | Port 1 Data Register                | PDR1         | R/W    | Port 1        | XXXXXXXX <sub>B</sub> |
| 000002 <sub>H</sub>                           | Port 2 Data Register                | PDR2         | R/W    | Port 2        | XXXXXXXX <sub>B</sub> |
| 000003 <sub>H</sub>                           | Port 3 Data Register                | PDR3         | R/W    | Port 3        | XXXXXXXX <sub>B</sub> |
| 000004 <sub>H</sub>                           | Port 4 Data Register                | PDR4         | R/W    | Port 4        | XXXXXXXX <sub>B</sub> |
| 000005 <sub>H</sub>                           | Port 5 Data Register                | PDR5         | R/W    | Port 5        | XXXXXXXX <sub>B</sub> |
| 000006 <sub>H</sub>                           | Port 6 Data Register                | PDR6         | R/W    | Port 6        | XXXXXXXX <sub>B</sub> |
| 000007 <sub>H</sub> to<br>00000A <sub>H</sub> | Reserved                            |              |        |               |                       |
| 00000B <sub>H</sub>                           | Port 5 Analog Input Enable Register | ADER5        | R/W    | Port 5, A/D   | 11111111 <sub>B</sub> |
| 00000C <sub>H</sub>                           | Port 6 Analog Input Enable Register | ADER6        | R/W    | Port 6, A/D   | 11111111 <sub>B</sub> |
| 00000D <sub>H</sub>                           | Reserved                            |              |        |               |                       |
| 00000E <sub>H</sub>                           | Input Level Select Register 0       | ILSR0        | R/W    | Ports         | 00000000 <sub>B</sub> |
| 00000F <sub>H</sub>                           | Input Level Select Register 1       | ILSR1        | R/W    | Ports         | 00000000 <sub>B</sub> |
| 000010 <sub>H</sub>                           | Port 0 Direction Register           | DDR0         | R/W    | Port 0        | 00000000 <sub>B</sub> |
| 000011 <sub>H</sub>                           | Port 1 Direction Register           | DDR1         | R/W    | Port 1        | 00000000 <sub>B</sub> |
| 000012 <sub>H</sub>                           | Port 2 Direction Register           | DDR2         | R/W    | Port 2        | XX000000 <sub>B</sub> |
| 000013 <sub>H</sub>                           | Port 3 Direction Register           | DDR3         | R/W    | Port 3        | 00000000 <sub>B</sub> |
| 000014 <sub>H</sub>                           | Port 4 Direction Register           | DDR4         | R/W    | Port 4        | XX000000 <sub>B</sub> |
| 000015 <sub>H</sub>                           | Port 5 Direction Register           | DDR5         | R/W    | Port 5        | X0000000 <sub>B</sub> |
| 000016 <sub>H</sub>                           | Port 6 Direction Register           | DDR6         | R/W    | Port 6        | 00000000 <sub>B</sub> |
| 000017 <sub>H</sub> to<br>000019 <sub>H</sub> | Reserved                            |              |        |               |                       |
| 00001A <sub>H</sub>                           | SIN input Level Setting Register    | DDRA         | W      | UART2, UART3  | X00XXXXX <sub>B</sub> |
| 00001B <sub>H</sub>                           | Reserved                            |              |        |               |                       |
| 00001C <sub>H</sub>                           | Port 0 Pull-up Control Register     | PUCR0        | R/W    | Port 0        | 00000000 <sub>B</sub> |
| 00001D <sub>H</sub>                           | Port 1 Pull-up Control Register     | PUCR1        | R/W    | Port 1        | 00000000 <sub>B</sub> |
| 00001E <sub>H</sub>                           | Port 2 Pull-up Control Register     | PUCR2        | R/W    | Port 2        | 00000000 <sub>B</sub> |
| 00001F <sub>H</sub>                           | Port 3 Pull-up Control Register     | PUCR3        | R/W    | Port 3        | 00000000 <sub>B</sub> |
| 000020 <sub>H</sub> to<br>000037 <sub>H</sub> | Reserved                            |              |        |               |                       |

*(Continued)*

| Address                                      | Register                                  | Abbreviation | Access | Resource name                           | Initial value         |
|--|---|--------------|--------|---|-----------------------|
| 000038 <sub>H</sub>                          | PPG 4 Operation Mode Control Register     | PPGC4        | W, R/W | 16-bit Programmable Pulse Generator 4/5 | 0X000XX1 <sub>B</sub> |
| 000039 <sub>H</sub>                          | PPG 5 Operation Mode Control Register     | PPGC5        | W, R/W |   | 0X000001 <sub>B</sub> |
| 00003A <sub>H</sub>                          | PPG 4/5 Count Clock Select Register       | PPG45        | R/W    |   | 000000X0 <sub>B</sub> |
| 00003B <sub>H</sub>                          | Address Detect Control Register 1         | PACSR1       | R/W    | Address Match Detection 1               | 00000000 <sub>B</sub> |
| 00003C <sub>H</sub>                          | PPG 6 Operation Mode Control Register     | PPGC6        | W, R/W | 16-bit Programmable Pulse Generator 6/7 | 0X000XX1 <sub>B</sub> |
| 00003D <sub>H</sub>                          | PPG 7 Operation Mode Control Register     | PPGC7        | W, R/W |   | 0X000001 <sub>B</sub> |
| 00003E <sub>H</sub>                          | PPG 6/7 Count Clock Select Register       | PPG67        | R/W    |   | 000000X0 <sub>B</sub> |
| 00003F <sub>H</sub>                          | Reserved                                  |              |        |   |                       |
| 000040 <sub>H</sub>                          | PPG 8 Operation Mode Control Register     | PPGC8        | W, R/W | 16-bit Programmable Pulse Generator 8/9 | 0X000XX1 <sub>B</sub> |
| 000041 <sub>H</sub>                          | PPG 9 Operation Mode Control Register     | PPGC9        | W, R/W |   | 0X000001 <sub>B</sub> |
| 000042 <sub>H</sub>                          | PPG 8/9 Count Clock Select Register       | PPG89        | R/W    |   | 000000X0 <sub>B</sub> |
| 000043 <sub>H</sub>                          | Reserved                                  |              |        |   |                       |
| 000044 <sub>H</sub>                          | PPG A Operation Mode Control Register     | PPGCA        | W, R/W | 16-bit Programmable Pulse Generator A/B | 0X000XX1 <sub>B</sub> |
| 000045 <sub>H</sub>                          | PPG B Operation Mode Control Register     | PPGCB        | W, R/W |   | 0X000001 <sub>B</sub> |
| 000046 <sub>H</sub>                          | PPG A/B Count Clock Select Register       | PPGAB        | R/W    |   | 000000X0 <sub>B</sub> |
| 000047 <sub>H</sub>                          | Reserved                                  |              |        |   |                       |
| 000048 <sub>H</sub>                          | PPG C Operation Mode Control Register     | PPGCC        | W,R/W  | 16-bit Programmable Pulse Generator C/D | 0X000XX1 <sub>B</sub> |
| 000049 <sub>H</sub>                          | PPG D Operation Mode Control Register     | PPGCD        | W,R/W  |   | 0X000001 <sub>B</sub> |
| 00004A <sub>H</sub>                          | PPG C/D Count Clock Select Register       | PPGCD        | R/W    |   | 000000X0 <sub>B</sub> |
| 00004B <sub>H</sub>                          | Reserved                                  |              |        |   |                       |
| 00004C <sub>H</sub>                          | PPG E Operation Mode Control Register     | PPGCE        | W,R/W  | 16-bit Programmable Pulse Generator E/F | 0X000XX1 <sub>B</sub> |
| 00004D <sub>H</sub>                          | PPG F Operation Mode Control Register     | PPGCF        | W,R/W  |   | 0X000001 <sub>B</sub> |
| 00004E <sub>H</sub>                          | PPG E/F Count Clock Select Register       | PPGEF        | R/W    |   | 000000X0 <sub>B</sub> |
| 00004F <sub>H</sub>                          | Reserved                                  |              |        |   |                       |
| 000050 <sub>H</sub>                          | Input Capture Control Status Register 0/1 | ICS01        | R/W    | Input Capture 0/1                       | 00000000 <sub>B</sub> |
| 000051 <sub>H</sub>                          | Input Capture Edge Register 0/1           | ICE01        | R/W, R |   | XXX0X0XX <sub>B</sub> |
| 000052 <sub>H</sub> ,<br>000053 <sub>H</sub> | Reserved                                  |              |        |   |                       |
| 000054 <sub>H</sub>                          | Input Capture Control Status Register 4/5 | ICS45        | R/W    | Input Capture 4/5                       | 00000000 <sub>B</sub> |
| 000055 <sub>H</sub>                          | Input Capture Edge Register 4/5           | ICE45        | R      |   | XXXXXXXX <sub>B</sub> |
| 000056 <sub>H</sub>                          | Input Capture Control Status Register 6/7 | ICS67        | R/W    | Input Capture 6/7                       | 00000000 <sub>B</sub> |
| 000057 <sub>H</sub>                          | Input Capture Edge Register 6/7           | ICE67        | R/W, R |   | XXX000XX <sub>B</sub> |

*(Continued)*

| Address  | Register   | Abbreviation | Access | Resource name                             | Initial value          |
|--|--|--------------|--------|---|------------------------|
| 000058 <sub>H</sub><br>to<br>00005B <sub>H</sub> | Reserved   |              |        |   |                        |
| 00005C <sub>H</sub>                              | Output Compare Control Status Register 4                   | OCS4         | R/W    | Output Compare 4/5                        | 0000XX00 <sub>B</sub>  |
| 00005D <sub>H</sub>                              | Output Compare Control Status Register 5                   | OCS5         | R/W    |   | 0XX00000 <sub>B</sub>  |
| 00005E <sub>H</sub>                              | Output Compare Control Status Register 6                   | OCS6         | R/W    | Output Compare 6/7                        | 0000XX00 <sub>B</sub>  |
| 00005F <sub>H</sub>                              | Output Compare Control Status Register 7                   | OCS7         | R/W    |   | 0XX00000 <sub>B</sub>  |
| 000060 <sub>H</sub>                              | Timer Control Status Register 0                            | TMCSR0       | R/W    | 16-bit Reload Timer 0                     | 00000000 <sub>B</sub>  |
| 000061 <sub>H</sub>                              | Timer Control Status Register 0                            | TMCSR0       | R/W    |   | XXXX0000 <sub>B</sub>  |
| 000062 <sub>H</sub>                              | Timer Control Status Register 1                            | TMCSR1       | R/W    | 16-bit Reload Timer 1                     | 00000000 <sub>B</sub>  |
| 000063 <sub>H</sub>                              | Timer Control Status Register 1                            | TMCSR1       | R/W    |   | XXXX0000 <sub>B</sub>  |
| 000064 <sub>H</sub>                              | Timer Control Status Register 2                            | TMCSR2       | R/W    | 16-bit Reload Timer 2                     | 00000000 <sub>B</sub>  |
| 000065 <sub>H</sub>                              | Timer Control Status Register 2                            | TMCSR2       | R/W    |   | XXXX0000 <sub>B</sub>  |
| 000066 <sub>H</sub>                              | Timer Control Status Register 3                            | TMCSR3       | R/W    | 16-bit Reload Timer 3                     | 00000000 <sub>B</sub>  |
| 000067 <sub>H</sub>                              | Timer Control Status Register 3                            | TMCSR3       | R/W    |   | XXXX0000 <sub>B</sub>  |
| 000068 <sub>H</sub>                              | A/D Control Status Register 0                              | ADCS0        | R/W    | A/D Converter                             | 000XXXX0 <sub>B</sub>  |
| 000069 <sub>H</sub>                              | A/D Control Status Register 1                              | ADCS1        | R/W    |   | 0000000X <sub>B</sub>  |
| 00006A <sub>H</sub>                              | A/D Data Register 0  | ADCR0        | R      |   | 00000000 <sub>B</sub>  |
| 00006B <sub>H</sub>                              | A/D Data Register 1  | ADCR1        | R      |   | XXXXXX00 <sub>B</sub>  |
| 00006C <sub>H</sub>                              | ADC Setting Register 0                                     | ADSR0        | R/W    |   | 00000000 <sub>B</sub>  |
| 00006D <sub>H</sub>                              | ADC Setting Register 1                                     | ADSR1        | R/W    |   | 00000000 <sub>B</sub>  |
| 00006E <sub>H</sub>                              | Low Voltage/CPU Operation Detection Reset Control Register | LVRC         | R/W, W | Low Voltage/CPU Operation Detection Reset | 00111000 <sub>B</sub>  |
| 00006F <sub>H</sub>                              | ROM Mirror Function Select Register                        | ROMM         | W      | ROM Mirror                                | XXXXXXXX1 <sub>B</sub> |
| 000070 <sub>H</sub><br>to<br>00007F <sub>H</sub> | Reserved   |              |        |   |                        |
| 000080 <sub>H</sub><br>to<br>00008F <sub>H</sub> | Reserved for CAN controller 1. Refer to "CAN Controllers"  |              |        |   |                        |
| 000090 <sub>H</sub><br>to<br>00009A <sub>H</sub> | Reserved   |              |        |   |                        |

*(Continued)*

| Address                                      | Register   | Abbreviation | Access | Resource name                         | Initial value          |
|--|--|--------------|--------|---------------------------------------|------------------------|
| 00009B <sub>H</sub>                          | DMA Descriptor Channel Specification Register                          | DCSR         | R/W    | DMA                                   | 00000000 <sub>B</sub>  |
| 00009C <sub>H</sub>                          | DMA Status Register L Register   | DSRL         | R/W    |                                       | 00000000 <sub>B</sub>  |
| 00009D <sub>H</sub>                          | DMA Status Register H Register   | DSRH         | R/W    |                                       | 00000000 <sub>B</sub>  |
| 00009E <sub>H</sub>                          | Address Detect Control Register 0                                      | PACSR0       | R/W    | Address Match Detection 0             | 00000000 <sub>B</sub>  |
| 00009F <sub>H</sub>                          | Delayed Interrupt/Release Register                                     | DIRR         | R/W    | Delayed Interrupt                     | XXXXXXXX0 <sub>B</sub> |
| 0000A0 <sub>H</sub>                          | Low-power Consumption Mode Control Register                            | LPMCR        | W,R/W  | Low Power Consumption Control Circuit | 00011000 <sub>B</sub>  |
| 0000A1 <sub>H</sub>                          | Clock Selection Register   | CKSCR        | R,R/W  | Low Power Consumption Control Circuit | 11111100 <sub>B</sub>  |
| 0000A2 <sub>H</sub> ,<br>0000A3 <sub>H</sub> | Reserved   |              |        |                                       |                        |
| 0000A4 <sub>H</sub>                          | DMA Stop Status Register   | DSSR         | R/W    | DMA                                   | 00000000 <sub>B</sub>  |
| 0000A5 <sub>H</sub>                          | Automatic Ready Function Selection Register                            | ARSR         | W      | External Memory Access                | 0011XX00 <sub>B</sub>  |
| 0000A6 <sub>H</sub>                          | External Address Output Control Register                               | HACR         | W      |                                       | 00000000 <sub>B</sub>  |
| 0000A7 <sub>H</sub>                          | Bus Control Signal Selection Register                                  | ECSR         | W      |                                       | 0000000X <sub>B</sub>  |
| 0000A8 <sub>H</sub>                          | Watchdog Control Register  | WDTC         | R,W    | Watchdog Timer                        | XXXXX111 <sub>B</sub>  |
| 0000A9 <sub>H</sub>                          | Timebase Timer Control Register  | TBTC         | W,R/W  | Timebase timer                        | 1XX00100 <sub>B</sub>  |
| 0000AA <sub>H</sub>                          | Watch Timer Control Register   | WTC          | R,R/W  | Watch Timer                           | 1X001000 <sub>B</sub>  |
| 0000AB <sub>H</sub>                          | Reserved   |              |        |                                       |                        |
| 0000AC <sub>H</sub>                          | DMA Enable Register L Register   | DERL         | R/W    | DMA                                   | 00000000 <sub>B</sub>  |
| 0000AD <sub>H</sub>                          | DMA Enable Register H Register   | DERH         | R/W    |                                       | 00000000 <sub>B</sub>  |
| 0000AE <sub>H</sub>                          | Flash Control Status Register (Flash Devices only. Otherwise reserved) | FMCS         | R,R/W  | Flash memory                          | 000X0000 <sub>B</sub>  |
| 0000AF <sub>H</sub>                          | Reserved   |              |        |                                       |                        |
| 0000B0 <sub>H</sub>                          | Interrupt Control Register 00  | ICR00        | W,R/W  | Interrupt Control                     | 00000111 <sub>B</sub>  |
| 0000B1 <sub>H</sub>                          | Interrupt Control Register 01  | ICR01        | W,R/W  |                                       | 00000111 <sub>B</sub>  |
| 0000B2 <sub>H</sub>                          | Interrupt Control Register 02  | ICR02        | W,R/W  |                                       | 00000111 <sub>B</sub>  |
| 0000B3 <sub>H</sub>                          | Interrupt Control Register 03  | ICR03        | W,R/W  |                                       | 00000111 <sub>B</sub>  |
| 0000B4 <sub>H</sub>                          | Interrupt Control Register 04  | ICR04        | W,R/W  |                                       | 00000111 <sub>B</sub>  |
| 0000B5 <sub>H</sub>                          | Interrupt Control Register 05  | ICR05        | W,R/W  |                                       | 00000111 <sub>B</sub>  |
| 0000B6 <sub>H</sub>                          | Interrupt Control Register 06  | ICR06        | W,R/W  |                                       | 00000111 <sub>B</sub>  |
| 0000B7 <sub>H</sub>                          | Interrupt Control Register 07  | ICR07        | W,R/W  |                                       | 00000111 <sub>B</sub>  |
| 0000B8 <sub>H</sub>                          | Interrupt Control Register 08  | ICR08        | W,R/W  |                                       | 00000111 <sub>B</sub>  |

*(Continued)*

| Address                                       | Register                                  | Abbreviation | Access      | Resource name        | Initial value         |
|---|---|--------------|-------------|----------------------|-----------------------|
| 0000B9 <sub>H</sub>                           | Interrupt Control Register 09             | ICR09        | W,R/W       | Interrupt Control    | 00000111 <sub>B</sub> |
| 0000BA <sub>H</sub>                           | Interrupt Control Register 10             | ICR10        | W,R/W       |                      | 00000111 <sub>B</sub> |
| 0000BB <sub>H</sub>                           | Interrupt Control Register 11             | ICR11        | W,R/W       |                      | 00000111 <sub>B</sub> |
| 0000BC <sub>H</sub>                           | Interrupt Control Register 12             | ICR12        | W,R/W       |                      | 00000111 <sub>B</sub> |
| 0000BD <sub>H</sub>                           | Interrupt Control Register 13             | ICR13        | W,R/W       |                      | 00000111 <sub>B</sub> |
| 0000BE <sub>H</sub>                           | Interrupt Control Register 14             | ICR14        | W,R/W       |                      | 00000111 <sub>B</sub> |
| 0000BF <sub>H</sub>                           | Interrupt Control Register 15             | ICR15        | W,R/W       |                      | 00000111 <sub>B</sub> |
| 0000C0 <sub>H</sub><br>to 0000C9 <sub>H</sub> | Reserved                                  |              |             |                      |                       |
| 0000CA <sub>H</sub>                           | External Interrupt Enable Register 1      | ENIR1        | R/W         | External Interrupt 1 | 00000000 <sub>B</sub> |
| 0000CB <sub>H</sub>                           | External Interrupt Source Register 1      | EIRR1        | R/W         |                      | XXXXXXXX <sub>B</sub> |
| 0000CC <sub>H</sub>                           | External Interrupt Level Register 1       | ELVR1        | R/W         |                      | 00000000 <sub>B</sub> |
| 0000CD <sub>H</sub>                           | External Interrupt Level Register 1       | ELVR1        | R/W         |                      | 00000000 <sub>B</sub> |
| 0000CE <sub>H</sub>                           | External Interrupt Source Select Register | EISSR        | R/W         |                      | 00000000 <sub>B</sub> |
| 0000CF <sub>H</sub>                           | PLL/Sub clock Control register            | PSCCR        | W           | PLL                  | XXXX0000 <sub>B</sub> |
| 0000D0 <sub>H</sub>                           | DMA Buffer Address Pointer L Register     | BAPL         | R/W         | DMA                  | XXXXXXXX <sub>B</sub> |
| 0000D1 <sub>H</sub>                           | DMA Buffer Address Pointer M Register     | BAPM         | R/W         |                      | XXXXXXXX <sub>B</sub> |
| 0000D2 <sub>H</sub>                           | DMA Buffer Address Pointer H Register     | BAPH         | R/W         |                      | XXXXXXXX <sub>B</sub> |
| 0000D3 <sub>H</sub>                           | DMA Control Register                      | DMACS        | R/W         |                      | XXXXXXXX <sub>B</sub> |
| 0000D4 <sub>H</sub>                           | I/O Register Address Pointer L Register   | IOAL         | R/W         |                      | XXXXXXXX <sub>B</sub> |
| 0000D5 <sub>H</sub>                           | I/O Register Address Pointer H Register   | IOAH         | R/W         |                      | XXXXXXXX <sub>B</sub> |
| 0000D6 <sub>H</sub>                           | Data Counter L Register                   | DCTL         | R/W         |                      | XXXXXXXX <sub>B</sub> |
| 0000D7 <sub>H</sub>                           | Data Counter H Register                   | DCTH         | R/W         |                      | XXXXXXXX <sub>B</sub> |
| 0000D8 <sub>H</sub>                           | Serial Mode Register 2                    | SMR2         | W,R/W       | UART2                | 00000000 <sub>B</sub> |
| 0000D9 <sub>H</sub>                           | Serial Control Register 2                 | SCR2         | W,R/W       |                      | 00000000 <sub>B</sub> |
| 0000DA <sub>H</sub>                           | Reception/Transmission Data Register 2    | RDR2/TDR2    | R/W         |                      | 00000000 <sub>B</sub> |
| 0000DB <sub>H</sub>                           | Serial Status Register 2                  | SSR2         | R,R/W       |                      | 00001000 <sub>B</sub> |
| 0000DC <sub>H</sub>                           | Extended Communication Control Register 2 | ECCR2        | R,W,<br>R/W |                      | 000000XX <sub>B</sub> |
| 0000DD <sub>H</sub>                           | Extended Status/Control Register 2        | ESCR2        | R/W         |                      | 00000100 <sub>B</sub> |
| 0000DE <sub>H</sub>                           | Baud Rate Generator Register 20           | BGR20        | R/W         |                      | 00000000 <sub>B</sub> |

*(Continued)*

| Address                                       | Register                        | Abbreviation | Access | Resource name                           | Initial value         |
|---|---------------------------------|--------------|--------|---|-----------------------|
| 0000DF <sub>H</sub>                           | Baud Rate Generator Register 21 | BGR21        | R/W    | UART2                                   | 00000000 <sub>B</sub> |
| 0000E0 <sub>H</sub><br>to 0000EF <sub>H</sub> | Reserved                        |              |        |   |                       |
| 0000F0 <sub>H</sub><br>to 0000FF <sub>H</sub> | External area                   |              |        |   |                       |
| 007900 <sub>H</sub><br>to 007907 <sub>H</sub> | Reserved                        |              |        |   |                       |
| 007908 <sub>H</sub>                           | Reload Register L4              | PRL4         | R/W    | 16-bit Programmable Pulse Generator 4/5 | XXXXXXXX <sub>B</sub> |
| 007909 <sub>H</sub>                           | Reload Register H4              | PRLH4        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00790A <sub>H</sub>                           | Reload Register L5              | PRL5         | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00790B <sub>H</sub>                           | Reload Register H5              | PRLH5        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00790C <sub>H</sub>                           | Reload Register L6              | PRL6         | R/W    | 16-bit Programmable Pulse Generator 6/7 | XXXXXXXX <sub>B</sub> |
| 00790D <sub>H</sub>                           | Reload Register H6              | PRLH6        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00790E <sub>H</sub>                           | Reload Register L7              | PRL7         | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00790F <sub>H</sub>                           | Reload Register H7              | PRLH7        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 007910 <sub>H</sub>                           | Reload Register L8              | PRL8         | R/W    | 16-bit Programmable Pulse Generator 8/9 | XXXXXXXX <sub>B</sub> |
| 007911 <sub>H</sub>                           | Reload Register H8              | PRLH8        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 007912 <sub>H</sub>                           | Reload Register L9              | PRL9         | R/W    |   | XXXXXXXX <sub>B</sub> |
| 007913 <sub>H</sub>                           | Reload Register H9              | PRLH9        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 007914 <sub>H</sub>                           | Reload Register LA              | PRLA         | R/W    | 16-bit Programmable Pulse Generator A/B | XXXXXXXX <sub>B</sub> |
| 007915 <sub>H</sub>                           | Reload Register HA              | PRLHA        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 007916 <sub>H</sub>                           | Reload Register LB              | PRLB         | R/W    |   | XXXXXXXX <sub>B</sub> |
| 007917 <sub>H</sub>                           | Reload Register HB              | PRLHB        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 007918 <sub>H</sub>                           | Reload Register LC              | PRLC         | R/W    | 16-bit Programmable Pulse Generator C/D | XXXXXXXX <sub>B</sub> |
| 007919 <sub>H</sub>                           | Reload Register HC              | PRLHC        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00791A <sub>H</sub>                           | Reload Register LD              | PRLD         | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00791B <sub>H</sub>                           | Reload Register HD              | PRLHD        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00791C <sub>H</sub>                           | Reload Register LE              | PRLLE        | R/W    | 16-bit Programmable Pulse Generator E/F | XXXXXXXX <sub>B</sub> |
| 00791D <sub>H</sub>                           | Reload Register HE              | PRLHE        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00791E <sub>H</sub>                           | Reload Register LF              | PRLLF        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 00791F <sub>H</sub>                           | Reload Register HF              | PRLHF        | R/W    |   | XXXXXXXX <sub>B</sub> |
| 007920 <sub>H</sub>                           | Input Capture Register 0        | IPCP0        | R      | Input Capture 0/1                       | XXXXXXXX <sub>B</sub> |
| 007921 <sub>H</sub>                           | Input Capture Register 0        | IPCP0        | R      |   | XXXXXXXX <sub>B</sub> |
| 007922 <sub>H</sub>                           | Input Capture Register 1        | IPCP1        | R      |   | XXXXXXXX <sub>B</sub> |
| 007923 <sub>H</sub>                           | Input Capture Register 1        | IPCP1        | R      |   | XXXXXXXX <sub>B</sub> |

*(Continued)*

| Address  | Register                           | Abbreviation    | Access | Resource name            | Initial value          |
|--|------------------------------------|-----------------|--------|--------------------------|------------------------|
| 007924 <sub>H</sub><br>to<br>007927 <sub>H</sub> | Reserved                           |                 |        |                          |                        |
| 007928 <sub>H</sub>                              | Input Capture Register 4           | IPCP4           | R      | Input Capture 4/5        | XXXXXXXX <sub>B</sub>  |
| 007929 <sub>H</sub>                              | Input Capture Register 4           | IPCP4           | R      |                          | XXXXXXXX <sub>B</sub>  |
| 00792A <sub>H</sub>                              | Input Capture Register 5           | IPCP5           | R      |                          | XXXXXXXX <sub>B</sub>  |
| 00792B <sub>H</sub>                              | Input Capture Register 5           | IPCP5           | R      |                          | XXXXXXXX <sub>B</sub>  |
| 00792C <sub>H</sub>                              | Input Capture Register 6           | IPCP6           | R      | Input Capture 6/7        | XXXXXXXX <sub>B</sub>  |
| 00792D <sub>H</sub>                              | Input Capture Register 6           | IPCP6           | R      |                          | XXXXXXXX <sub>B</sub>  |
| 00792E <sub>H</sub>                              | Input Capture Register 7           | IPCP7           | R      |                          | XXXXXXXX <sub>B</sub>  |
| 00792F <sub>H</sub>                              | Input Capture Register 7           | IPCP7           | R      |                          | XXXXXXXX <sub>B</sub>  |
| 007930 <sub>H</sub><br>to<br>007937 <sub>H</sub> | Reserved                           |                 |        |                          |                        |
| 007938 <sub>H</sub>                              | Output Compare Register 4          | OCCP4           | R/W    | Output Compare 4/5       | XXXXXXXX <sub>B</sub>  |
| 007939 <sub>H</sub>                              | Output Compare Register 4          | OCCP4           | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 00793A <sub>H</sub>                              | Output Compare Register 5          | OCCP5           | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 00793B <sub>H</sub>                              | Output Compare Register 5          | OCCP5           | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 00793C <sub>H</sub>                              | Output Compare Register 6          | OCCP6           | R/W    | Output Compare 6/7       | XXXXXXXX <sub>B</sub>  |
| 00793D <sub>H</sub>                              | Output Compare Register 6          | OCCP6           | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 00793E <sub>H</sub>                              | Output Compare Register 7          | OCCP7           | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 00793F <sub>H</sub>                              | Output Compare Register 7          | OCCP7           | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 007940 <sub>H</sub>                              | Timer Data Register 0              | TCDT0           | R/W    | Free-run Timer 0         | 00000000 <sub>B</sub>  |
| 007941 <sub>H</sub>                              | Timer Data Register 0              | TCDT0           | R/W    |                          | 00000000 <sub>B</sub>  |
| 007942 <sub>H</sub>                              | Timer Control Status Register 0    | TCCSL0          | R/W    |                          | 00000000 <sub>B</sub>  |
| 007943 <sub>H</sub>                              | Timer Control Status Register 0    | TCCSH0          | R/W    |                          | 0XXXXXXXX <sub>B</sub> |
| 007944 <sub>H</sub>                              | Timer Data Register 1              | TCDT1           | R/W    | Free-run Timer 1         | 00000000 <sub>B</sub>  |
| 007945 <sub>H</sub>                              | Timer Data Register 1              | TCDT1           | R/W    |                          | 00000000 <sub>B</sub>  |
| 007946 <sub>H</sub>                              | Timer Control Status Register 1    | TCCSL1          | R/W    |                          | 00000000 <sub>B</sub>  |
| 007947 <sub>H</sub>                              | Timer Control Status Register 1    | TCCSH1          | R/W    |                          | 0XXXXXXXX <sub>B</sub> |
| 007948 <sub>H</sub>                              | Timer Register 0/Reload Register 0 | TMR0/TMRL<br>R0 | R/W    | 16-bit Reload<br>Timer 0 | XXXXXXXX <sub>B</sub>  |
| 007949 <sub>H</sub>                              |                                    |                 | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 00794A <sub>H</sub>                              | Timer Register 1/Reload Register 1 | TMR1/TMRL<br>R1 | R/W    | 16-bit Reload<br>Timer 1 | XXXXXXXX <sub>B</sub>  |
| 00794B <sub>H</sub>                              |                                    |                 | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 00794C <sub>H</sub>                              | Timer Register 2/Reload Register 2 | TMR2/TMRL<br>R2 | R/W    | 16-bit Reload<br>Timer 2 | XXXXXXXX <sub>B</sub>  |
| 00794D <sub>H</sub>                              |                                    |                 | R/W    |                          | XXXXXXXX <sub>B</sub>  |
| 00794E <sub>H</sub>                              | Timer Register 3/Reload Register 3 | TMR3/TMRL<br>R3 | R/W    | 16-bit Reload<br>Timer 3 | XXXXXXXX <sub>B</sub>  |
| 00794F <sub>H</sub>                              |                                    |                 | R/W    |                          | XXXXXXXX <sub>B</sub>  |

*(Continued)*



| Address  | Register  | Abbreviation | Access      | Resource name                | Initial value          |
|--|---|--------------|-------------|------------------------------|------------------------|
| 007950 <sub>H</sub>                              | Serial Mode Register 3                                | SMR3         | W, R/W      | UART3                        | 00000000 <sub>B</sub>  |
| 007951 <sub>H</sub>                              | Serial Control Register 3                             | SCR3         | W, R/W      |                              | 00000000 <sub>B</sub>  |
| 007952 <sub>H</sub>                              | Reception/Transmission Data Register 3                | RDR3/TDR3    | R/W         |                              | 00000000 <sub>B</sub>  |
| 007953 <sub>H</sub>                              | Serial Status Register 3                              | SSR3         | R,R/W       |                              | 00001000 <sub>B</sub>  |
| 007954 <sub>H</sub>                              | Extended Communication Control Register 3             | ECCR3        | R,W,<br>R/W |                              | 000000XX <sub>B</sub>  |
| 007955 <sub>H</sub>                              | Extended Status Control Register 3                    | ESCR3        | R/W         |                              | 00000100 <sub>B</sub>  |
| 007956 <sub>H</sub>                              | Baud Rate Generator Register 30                       | BGR30        | R/W         |                              | 00000000 <sub>B</sub>  |
| 007957 <sub>H</sub>                              | Baud Rate Generator Register 31                       | BGR31        | R/W         |                              | 00000000 <sub>B</sub>  |
| 007958 <sub>H</sub> ,<br>007959 <sub>H</sub>     | Reserved  |              |             |                              |                        |
| 007960 <sub>H</sub>                              | Clock supervisor Control Register                     | CSVCR        | R, R/W      | Clock Supervisor             | 00011100 <sub>B</sub>  |
| 007961 <sub>H</sub><br>to<br>00796D <sub>H</sub> | Reserved  |              |             |                              |                        |
| 00796E <sub>H</sub>                              | CAN Direct Mode Register                              | CDMR         | R/W         | CAN Clock Sync               | XXXXXXXX0 <sub>B</sub> |
| 00796F <sub>H</sub>                              | Reserved  |              |             |                              |                        |
| 007970 <sub>H</sub>                              | I <sup>2</sup> C Bus Status Register 0                | IBSR0        | R           | I <sup>2</sup> C Interface 0 | 00000000 <sub>B</sub>  |
| 007971 <sub>H</sub>                              | I <sup>2</sup> C Bus Control Register 0               | IBCR0        | W,R/W       |                              | 00000000 <sub>B</sub>  |
| 007972 <sub>H</sub>                              | I <sup>2</sup> C 10-bit Slave Address Register 0      | ITBAL0       | R/W         |                              | 00000000 <sub>B</sub>  |
| 007973 <sub>H</sub>                              |   | ITBAH0       | R/W         |                              | 00000000 <sub>B</sub>  |
| 007974 <sub>H</sub>                              | I <sup>2</sup> C 10-bit Slave Address Mask Register 0 | ITMKL0       | R/W         |                              | 11111111 <sub>B</sub>  |
| 007975 <sub>H</sub>                              |   | ITMKH0       | R/W         |                              | 00111111 <sub>B</sub>  |
| 007976 <sub>H</sub>                              | I <sup>2</sup> C 7-bit Slave Address Register 0       | ISBA0        | R/W         |                              | 00000000 <sub>B</sub>  |
| 007977 <sub>H</sub>                              | I <sup>2</sup> C 7-bit Slave Address Mask Register 0  | ISMK0        | R/W         |                              | 01111111 <sub>B</sub>  |
| 007978 <sub>H</sub>                              | I <sup>2</sup> C data register 0                      | IDAR0        | R/W         |                              | 00000000 <sub>B</sub>  |
| 007979 <sub>H</sub> ,<br>00797A <sub>H</sub>     | Reserved  |              |             |                              |                        |
| 00797B <sub>H</sub>                              | I <sup>2</sup> C Clock Control Register 0             | ICCR0        | R/W         | I <sup>2</sup> C Interface 0 | 00011111 <sub>B</sub>  |
| 00797C <sub>H</sub><br>to 0079A1 <sub>H</sub>    | Reserved  |              |             |                              |                        |
| 0079A2 <sub>H</sub>                              | Flash Write Control Register 0                        | FWR0         | R/W         | Dual Operation<br>Flash      | 00000000 <sub>B</sub>  |
| 0079A3 <sub>H</sub>                              | Flash Write Control Register 1                        | FWR1         | R/W         |                              | 00000000 <sub>B</sub>  |
| 0079A4 <sub>H</sub>                              | Sector Change Setting Register 0                      | SSR0         | R/W         |                              | 00XXXXX0 <sub>B</sub>  |
| 0079A5 <sub>H</sub><br>to<br>0079C1 <sub>H</sub> | Reserved  |              |             |                              |                        |
| 0079C2 <sub>H</sub>                              | Clock modulator Control Register                      | CMCR         | R, R/W      | Clock Modulator              | 0001X000 <sub>B</sub>  |

*(Continued)*

(Continued)

| Address                                    | Register  | Abbreviation | Access | Resource name             | Initial value         |
|--|---|--------------|--------|---------------------------|-----------------------|
| 0079C3 <sub>H</sub> to 0079DF <sub>H</sub> | Reserved  |              |        |                           |                       |
| 0079E0 <sub>H</sub>                        | Detect Address Setting Register 0                         | PADR0        | R/W    | Address Match Detection 0 | XXXXXXXX <sub>B</sub> |
| 0079E1 <sub>H</sub>                        | Detect Address Setting Register 0                         | PADR0        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079E2 <sub>H</sub>                        | Detect Address Setting Register 0                         | PADR0        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079E3 <sub>H</sub>                        | Detect Address Setting Register 1                         | PADR1        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079E4 <sub>H</sub>                        | Detect Address Setting Register 1                         | PADR1        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079E5 <sub>H</sub>                        | Detect Address Setting Register 1                         | PADR1        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079E6 <sub>H</sub>                        | Detect Address Setting Register 2                         | PADR2        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079E7 <sub>H</sub>                        | Detect Address Setting Register 2                         | PADR2        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079E8 <sub>H</sub>                        | Detect Address Setting Register 2                         | PADR2        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079E9 <sub>H</sub> to 0079EF <sub>H</sub> | Reserved  |              |        |                           |                       |
| 0079F0 <sub>H</sub>                        | Detect Address Setting Register 3                         | PADR3        | R/W    | Address Match Detection 1 | XXXXXXXX <sub>B</sub> |
| 0079F1 <sub>H</sub>                        | Detect Address Setting Register 3                         | PADR3        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079F2 <sub>H</sub>                        | Detect Address Setting Register 3                         | PADR3        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079F3 <sub>H</sub>                        | Detect Address Setting Register 4                         | PADR4        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079F4 <sub>H</sub>                        | Detect Address Setting Register 4                         | PADR4        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079F5 <sub>H</sub>                        | Detect Address Setting Register 4                         | PADR4        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079F6 <sub>H</sub>                        | Detect Address Setting Register 5                         | PADR5        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079F7 <sub>H</sub>                        | Detect Address Setting Register 5                         | PADR5        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079F8 <sub>H</sub>                        | Detect Address Setting Register 5                         | PADR5        | R/W    |                           | XXXXXXXX <sub>B</sub> |
| 0079F9 <sub>H</sub> to 007BFF <sub>H</sub> | Reserved  |              |        |                           |                       |
| 007C00 <sub>H</sub> to 007DFF <sub>H</sub> | Reserved for CAN controller 1. Refer to "CAN Controllers" |              |        |                           |                       |
| 007E00 <sub>H</sub> to 007FFF <sub>H</sub> | Reserved  |              |        |                           |                       |

Notes : " Initial value of "X" represents unknown value.

" Any write access to reserved addresses in I/O map should not be performed. A read access to reserved addresses results reading unknown value.

## 11. CAN Controllers

- Compliant with CAN standard Version2.0 Part A and Part B
  - Supports tr12ansmission/reception in standard frame and extended frame formats
- Supports transmitting of data frames by receiving remote frames
- 16 transmitting/receiving message buffers
  - 29-bit ID and 8-byte data
  - Multi-level message buffer configuration
- Provides full-bit comparison, full-bit mask, acceptance register 0/acceptance register 1 for each message buffer as ID acceptance mask
  - Two acceptance mask registers in either standard frame format or extended frame formats
- Bit rate programmable from 10 kbps to 2 Mbps (when input clock is at 16 MHz)

**List of Control Registers**

| Address             | Register                            | Abbreviation | Access | Initial Value                                  |
|---------------------|-------------------------------------|--------------|--------|--|
| <b>CAN1</b>         |                                     |              |        |  |
| 000080 <sub>H</sub> | Message buffer enable register      | BVALR        | R/W    | 00000000 <sub>B</sub><br>00000000 <sub>B</sub> |
| 000081 <sub>H</sub> |                                     |              |        |  |
| 000082 <sub>H</sub> | Transmit request register           | TREQR        | R/W    | 00000000 <sub>B</sub><br>00000000 <sub>B</sub> |
| 000083 <sub>H</sub> |                                     |              |        |  |
| 000084 <sub>H</sub> | Transmit cancel register            | TCANR        | W      | 00000000 <sub>B</sub><br>00000000 <sub>B</sub> |
| 000085 <sub>H</sub> |                                     |              |        |  |
| 000086 <sub>H</sub> | Transmission complete register      | TCR          | R/W    | 00000000 <sub>B</sub><br>00000000 <sub>B</sub> |
| 000087 <sub>H</sub> |                                     |              |        |  |
| 000088 <sub>H</sub> | Receive complete register           | RCR          | R/W    | 00000000 <sub>B</sub><br>00000000 <sub>B</sub> |
| 000089 <sub>H</sub> |                                     |              |        |  |
| 00008A <sub>H</sub> | Remote request receiving register   | RRTRR        | R/W    | 00000000 <sub>B</sub><br>00000000 <sub>B</sub> |
| 00008B <sub>H</sub> |                                     |              |        |  |
| 00008C <sub>H</sub> | Receive overrun register            | ROVRR        | R/W    | 00000000 <sub>B</sub><br>00000000 <sub>B</sub> |
| 00008D <sub>H</sub> |                                     |              |        |  |
| 00008E <sub>H</sub> | Reception interrupt enable register | RIER         | R/W    | 00000000 <sub>B</sub><br>00000000 <sub>B</sub> |
| 00008F <sub>H</sub> |                                     |              |        |  |

*(Continued)*

*(Continued)*

| Address             | Register                              | Abbreviation | Access           | Initial Value                                  |
|---------------------|---------------------------------------|--------------|------------------|--|
| <b>CAN1</b>         |                                       |              |                  |  |
| 007D00 <sub>H</sub> | Control status register               | CSR          | R/W, W<br>R/W, R | 0XXXX0X1 <sub>B</sub><br>00XXX000 <sub>B</sub> |
| 007D01 <sub>H</sub> |                                       |              |                  |  |
| 007D02 <sub>H</sub> | Last event indicator register         | LEIR         | R/W              | 00X0000 <sub>B</sub><br>XXXXXXXX <sub>B</sub>  |
| 007D03 <sub>H</sub> |                                       |              |                  |  |
| 007D04 <sub>H</sub> | Receive/transmit error counter        | RTEC         | R                | 0000000 <sub>B</sub><br>0000000 <sub>B</sub>   |
| 007D05 <sub>H</sub> |                                       |              |                  |  |
| 007D06 <sub>H</sub> | Bit timing register                   | BTR          | R/W              | 1111111 <sub>B</sub><br>X111111 <sub>B</sub>   |
| 007D07 <sub>H</sub> |                                       |              |                  |  |
| 007D08 <sub>H</sub> | IDE register                          | IDER         | R/W              | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub> |
| 007D09 <sub>H</sub> |                                       |              |                  |  |
| 007D0A <sub>H</sub> | Transmit RTR register                 | TRTRR        | R/W              | 0000000 <sub>B</sub><br>0000000 <sub>B</sub>   |
| 007D0B <sub>H</sub> |                                       |              |                  |  |
| 007D0C <sub>H</sub> | Remote frame receive waiting register | RFWTR        | R/W              | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub> |
| 007D0D <sub>H</sub> |                                       |              |                  |  |
| 007D0E <sub>H</sub> | Transmit interrupt enable register    | TIER         | R/W              | 0000000 <sub>B</sub><br>0000000 <sub>B</sub>   |
| 007D0F <sub>H</sub> |                                       |              |                  |  |
| 007D10 <sub>H</sub> | Acceptance mask select register       | AMSR         | R/W              | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub> |
| 007D11 <sub>H</sub> |                                       |              |                  |  |
| 007D12 <sub>H</sub> |                                       |              |                  | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub> |
| 007D13 <sub>H</sub> |                                       |              |                  |  |
| 007D14 <sub>H</sub> | Acceptance mask register 0            | AMR0         | R/W              | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub> |
| 007D15 <sub>H</sub> |                                       |              |                  |  |
| 007D16 <sub>H</sub> |                                       |              |                  | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub> |
| 007D17 <sub>H</sub> |                                       |              |                  |  |
| 007D18 <sub>H</sub> | Acceptance mask register 1            | AMR1         | R/W              | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub> |
| 007D19 <sub>H</sub> |                                       |              |                  |  |
| 007D1A <sub>H</sub> |                                       |              |                  | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub> |
| 007D1B <sub>H</sub> |                                       |              |                  |  |

**List of Message Buffers (ID Registers)**

| Address  | Register            | Abbreviation | Access | Initial Value  |
|--|---------------------|--------------|--------|--|
| <b>CAN1</b>                                      |                     |              |        |  |
| 007C00 <sub>H</sub><br>to<br>007C1F <sub>H</sub> | General-purpose RAM | —            | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007C20 <sub>H</sub>                              | ID register 0       | IDR0         | R/W    | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C21 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C22 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C23 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C24 <sub>H</sub>                              | ID register 1       | IDR1         | R/W    | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C25 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C26 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C27 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C28 <sub>H</sub>                              | ID register 2       | IDR2         | R/W    | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C29 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C2A <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C2B <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C2C <sub>H</sub>                              | ID register 3       | IDR3         | R/W    | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C2D <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C2E <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C2F <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C30 <sub>H</sub>                              | ID register 4       | IDR4         | R/W    | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C31 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C32 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C33 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C34 <sub>H</sub>                              | ID register 5       | IDR5         | R/W    | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C35 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C36 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C37 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C38 <sub>H</sub>                              | ID register 6       | IDR6         | R/W    | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C39 <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C3A <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C3B <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C3C <sub>H</sub>                              | ID register 7       | IDR7         | R/W    | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C3D <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C3E <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |
| 007C3F <sub>H</sub>                              |                     |              |        | XXXXXXXX <sub>B</sub><br>XXXXXXXX <sub>B</sub>       |

*(Continued)*

*(Continued)*

| Address             | Register       | Abbreviation | Access | Initial Value         |
|---------------------|----------------|--------------|--------|-----------------------|
| <b>CAN1</b>         |                |              |        |                       |
| 007C40 <sub>H</sub> | ID register 8  | IDR8         | R/W    | XXXXXXXX <sub>B</sub> |
| 007C41 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C42 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C43 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C44 <sub>H</sub> | ID register 9  | IDR9         | R/W    | XXXXXXXX <sub>B</sub> |
| 007C45 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C46 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C47 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C48 <sub>H</sub> | ID register 10 | IDR10        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C49 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C4A <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C4B <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C4C <sub>H</sub> | ID register 11 | IDR11        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C4D <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C4E <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C4F <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C50 <sub>H</sub> | ID register 12 | IDR12        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C51 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C52 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C53 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C54 <sub>H</sub> | ID register 13 | IDR13        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C55 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C56 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C57 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C58 <sub>H</sub> | ID register 14 | IDR14        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C59 <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C5A <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C5B <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C5C <sub>H</sub> | ID register 15 | IDR15        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C5D <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C5E <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |
| 007C5F <sub>H</sub> |                |              |        | XXXXXXXX <sub>B</sub> |

**List of Message Buffers (DLC Registers and Data Registers)**

| Address             | Register        | Abbreviation | Access | Initial Value         |
|---------------------|-----------------|--------------|--------|-----------------------|
| <b>CAN1</b>         |                 |              |        |                       |
| 007C60 <sub>H</sub> | DLC register 0  | DLCR0        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C61 <sub>H</sub> |                 |              |        |                       |
| 007C62 <sub>H</sub> | DLC register 1  | DLCR1        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C63 <sub>H</sub> |                 |              |        |                       |
| 007C64 <sub>H</sub> | DLC register 2  | DLCR2        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C65 <sub>H</sub> |                 |              |        |                       |
| 007C66 <sub>H</sub> | DLC register 3  | DLCR3        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C67 <sub>H</sub> |                 |              |        |                       |
| 007C68 <sub>H</sub> | DLC register 4  | DLCR4        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C69 <sub>H</sub> |                 |              |        |                       |
| 007C6A <sub>H</sub> | DLC register 5  | DLCR5        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C6B <sub>H</sub> |                 |              |        |                       |
| 007C6C <sub>H</sub> | DLC register 6  | DLCR6        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C6D <sub>H</sub> |                 |              |        |                       |
| 007C6E <sub>H</sub> | DLC register 7  | DLCR7        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C6F <sub>H</sub> |                 |              |        |                       |
| 007C70 <sub>H</sub> | DLC register 8  | DLCR8        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C71 <sub>H</sub> |                 |              |        |                       |
| 007C72 <sub>H</sub> | DLC register 9  | DLCR9        | R/W    | XXXXXXXX <sub>B</sub> |
| 007C73 <sub>H</sub> |                 |              |        |                       |
| 007C74 <sub>H</sub> | DLC register 10 | DLCR10       | R/W    | XXXXXXXX <sub>B</sub> |
| 007C75 <sub>H</sub> |                 |              |        |                       |
| 007C76 <sub>H</sub> | DLC register 11 | DLCR11       | R/W    | XXXXXXXX <sub>B</sub> |
| 007C77 <sub>H</sub> |                 |              |        |                       |
| 007C78 <sub>H</sub> | DLC register 12 | DLCR12       | R/W    | XXXXXXXX <sub>B</sub> |
| 007C79 <sub>H</sub> |                 |              |        |                       |
| 007C7A <sub>H</sub> | DLC register 13 | DLCR13       | R/W    | XXXXXXXX <sub>B</sub> |
| 007C7B <sub>H</sub> |                 |              |        |                       |
| 007C7C <sub>H</sub> | DLC register 14 | DLCR14       | R/W    | XXXXXXXX <sub>B</sub> |
| 007C7D <sub>H</sub> |                 |              |        |                       |
| 007C7E <sub>H</sub> | DLC register 15 | DLCR15       | R/W    | XXXXXXXX <sub>B</sub> |
| 007C7F <sub>H</sub> |                 |              |        |                       |

*(Continued)*

| Address  | Register                      | Abbreviation | Access | Initial Value  |
|--|-------------------------------|--------------|--------|--|
| <b>CAN1</b>                                      |                               |              |        |  |
| 007C80 <sub>H</sub><br>to<br>007C87 <sub>H</sub> | Data register 0<br>(8 bytes)  | DTR0         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007C88 <sub>H</sub><br>to<br>007C8F <sub>H</sub> | Data register 1<br>(8 bytes)  | DTR1         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007C90 <sub>H</sub><br>to<br>007C97 <sub>H</sub> | Data register 2<br>(8 bytes)  | DTR2         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007C98 <sub>H</sub><br>to<br>007C9F <sub>H</sub> | Data register 3<br>(8 bytes)  | DTR3         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CA0 <sub>H</sub><br>to<br>007CA7 <sub>H</sub> | Data register 4<br>(8 bytes)  | DTR4         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CA8 <sub>H</sub><br>to<br>007CAF <sub>H</sub> | Data register 5<br>(8 bytes)  | DTR5         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CB0 <sub>H</sub><br>to<br>007CB7 <sub>H</sub> | Data register 6<br>(8 bytes)  | DTR6         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CB8 <sub>H</sub><br>to<br>007CBF <sub>H</sub> | Data register 7<br>(8 bytes)  | DTR7         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CC0 <sub>H</sub><br>to<br>007CC7 <sub>H</sub> | Data register 8<br>(8 bytes)  | DTR8         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CC8 <sub>H</sub><br>to<br>007CCF <sub>H</sub> | Data register 9<br>(8 bytes)  | DTR9         | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CD0 <sub>H</sub><br>to<br>007CD7 <sub>H</sub> | Data register 10<br>(8 bytes) | DTR10        | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CD8 <sub>H</sub><br>to<br>007CDF <sub>H</sub> | Data register 11<br>(8 bytes) | DTR11        | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CE0 <sub>H</sub><br>to<br>007CE7 <sub>H</sub> | Data register 12<br>(8 bytes) | DTR12        | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CE8 <sub>H</sub><br>to<br>007CEF <sub>H</sub> | Data register 13<br>(8 bytes) | DTR13        | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |

*(Continued)*



(Continued)

| Address  | Register                      | Abbreviation | Access | Initial Value  |
|--|-------------------------------|--------------|--------|--|
| CAN1   |                               |              |        |  |
| 007CF0 <sub>H</sub><br>to<br>007CF7 <sub>H</sub> | Data register 14<br>(8 bytes) | DTR14        | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |
| 007CF8 <sub>H</sub><br>to<br>007CFF <sub>H</sub> | Data register 15<br>(8 bytes) | DTR15        | R/W    | XXXXXXXX <sub>B</sub><br>to<br>XXXXXXXX <sub>B</sub> |

**12. Interrupt Factors, Interrupt Vectors, Interrupt Control Register**

| Interrupt cause                     | EI <sup>2</sup> OS corresponding | DMA ch number | Interrupt vector |                     | Interrupt control register |                     |
|-------------------------------------|----------------------------------|---------------|------------------|---------------------|----------------------------|---------------------|
|                                     |                                  |               | Number           | Address             | Number                     | Address             |
| Reset                               | N                                | —             | #08              | FFFFDC <sub>H</sub> | —                          | —                   |
| INT9 instruction                    | N                                | —             | #09              | FFFFD8 <sub>H</sub> | —                          | —                   |
| Exception                           | N                                | —             | #10              | FFFFD4 <sub>H</sub> | —                          | —                   |
| Reserved                            | N                                | —             | #11              | FFFFD0 <sub>H</sub> | ICR00                      | 0000B0 <sub>H</sub> |
| Reserved                            | N                                | —             | #12              | FFFFCC <sub>H</sub> |                            |                     |
| CAN 1 RX / Input Capture 6          | Y1                               | —             | #13              | FFFFC8 <sub>H</sub> | ICR01                      | 0000B1 <sub>H</sub> |
| CAN 1 TX/NS / Input Capture 7       | Y1                               | —             | #14              | FFFFC4 <sub>H</sub> |                            |                     |
| I <sup>2</sup> C                    | N                                | —             | #15              | FFFFC0 <sub>H</sub> | ICR02                      | 0000B2 <sub>H</sub> |
| Reserved                            | N                                | —             | #16              | FFFFBC <sub>H</sub> |                            |                     |
| 16-bit Reload Timer 0               | Y1                               | 0             | #17              | FFFFB8 <sub>H</sub> | ICR03                      | 0000B3 <sub>H</sub> |
| 16-bit Reload Timer 1               | Y1                               | 1             | #18              | FFFFB4 <sub>H</sub> |                            |                     |
| 16-bit Reload Timer 2               | Y1                               | 2             | #19              | FFFFB0 <sub>H</sub> | ICR04                      | 0000B4 <sub>H</sub> |
| 16-bit Reload Timer 3               | Y1                               | —             | #20              | FFFFAC <sub>H</sub> |                            |                     |
| PPG 4/5                             | N                                | —             | #21              | FFFFA8 <sub>H</sub> | ICR05                      | 0000B5 <sub>H</sub> |
| PPG 6/7                             | N                                | —             | #22              | FFFFA4 <sub>H</sub> |                            |                     |
| PPG 8/9/C/D                         | N                                | —             | #23              | FFFFA0 <sub>H</sub> | ICR06                      | 0000B6 <sub>H</sub> |
| PPG A/B/E/F                         | N                                | —             | #24              | FFFF9C <sub>H</sub> |                            |                     |
| Timebase Timer                      | N                                | —             | #25              | FFFF98 <sub>H</sub> | ICR07                      | 0000B7 <sub>H</sub> |
| External Interrupt 8 to 11          | Y1                               | 3             | #26              | FFFF94 <sub>H</sub> |                            |                     |
| Watch Timer                         | N                                | —             | #27              | FFFF90 <sub>H</sub> | ICR08                      | 0000B8 <sub>H</sub> |
| External Interrupt 12 to 15         | Y1                               | 4             | #28              | FFFF8C <sub>H</sub> |                            |                     |
| A/D Converter                       | Y1                               | 5             | #29              | FFFF88 <sub>H</sub> | ICR09                      | 0000B9 <sub>H</sub> |
| Free-run Timer 0 / free-run Timer 1 | N                                | —             | #30              | FFFF84 <sub>H</sub> |                            |                     |
| Input Capture 4/5                   | Y1                               | 6             | #31              | FFFF80 <sub>H</sub> | ICR10                      | 0000BA <sub>H</sub> |
| Output Compare 4/5                  | Y1                               | 7             | #32              | FFFF7C <sub>H</sub> |                            |                     |
| Input Capture 0/1                   | Y1                               | 8             | #33              | FFFF78 <sub>H</sub> | ICR11                      | 0000BB <sub>H</sub> |
| Output Compare 6/7                  | Y1                               | 9             | #34              | FFFF74 <sub>H</sub> |                            |                     |
| Reserved                            | N                                | 10            | #35              | FFFF70 <sub>H</sub> | ICR12                      | 0000BC <sub>H</sub> |
| Reserved                            | N                                | 11            | #36              | FFFF6C <sub>H</sub> |                            |                     |
| UART 3 RX                           | Y2                               | 12            | #37              | FFFF68 <sub>H</sub> | ICR13                      | 0000BD <sub>H</sub> |
| UART 3 TX                           | Y1                               | 13            | #38              | FFFF64 <sub>H</sub> |                            |                     |

*(Continued)*

(Continued)

| Interrupt cause   | EI <sup>2</sup> OS corresponding | DMA ch number | Interrupt vector |                     | Interrupt control register |                     |
|-------------------|----------------------------------|---------------|------------------|---------------------|----------------------------|---------------------|
|                   |                                  |               | Number           | Address             | Number                     | Address             |
| UART 2 RX         | Y2                               | 14            | #39              | FFFF60 <sub>H</sub> | ICR14                      | 0000BE <sub>H</sub> |
| UART 2 TX         | Y1                               | 15            | #40              | FFFF5C <sub>H</sub> |                            |                     |
| Flash Memory      | N                                | —             | #41              | FFFF58 <sub>H</sub> | ICR15                      | 0000BF <sub>H</sub> |
| Delayed Interrupt | N                                | —             | #42              | FFFF54 <sub>H</sub> |                            |                     |

Y1 : Usable

 Y2 : Usable, with EI<sup>2</sup>OS stop function

N : Unusable

- Notes :
- The peripheral resources sharing the ICR register have the same interrupt level.
  - When the peripheral resources sharing the ICR register use extended intelligent I/O service, only one can use EI<sup>2</sup>OS at a time.
  - When either of the two peripheral resources sharing the ICR register specifies EI<sup>2</sup>OS, the other one cannot use interrupts.

## 13. Electrical Characteristics


### 13.1 Absolute Maximum Ratings

| Parameter                                | Symbol               | Rating                |                       | Unit | Remarks                               |
|--|----------------------|-----------------------|-----------------------|------|---------------------------------------|
|  |                      | Min                   | Max                   |      |                                       |
| Power supply voltage*1                   | V <sub>CC</sub>      | V <sub>SS</sub> - 0.3 | V <sub>SS</sub> + 6.0 | V    |                                       |
|  | AV <sub>CC</sub>     | V <sub>SS</sub> - 0.3 | V <sub>SS</sub> + 6.0 | V    | V <sub>CC</sub> = AV <sub>CC</sub> *2 |
|  | AVRH                 | V <sub>SS</sub> - 0.3 | V <sub>SS</sub> + 6.0 | V    | AV <sub>CC</sub> ≥ AVRH*2             |
| Input voltage*1                          | V <sub>I</sub>       | V <sub>SS</sub> - 0.3 | V <sub>SS</sub> + 6.0 | V    | *3                                    |
| Output voltage*1                         | V <sub>O</sub>       | V <sub>SS</sub> - 0.3 | V <sub>SS</sub> + 6.0 | V    | *3                                    |
| Maximum Clamp Current                    | I <sub>CLAMP</sub>   | -4.0                  | +4.0                  | mA   | *5                                    |
| Total Maximum Clamp Current              | Σ I <sub>CLAMP</sub> | —                     | 40                    | mA   | *5                                    |
| "L" level maximum output current         | I <sub>OL</sub>      | —                     | 15                    | mA   | *4                                    |
| "L" level average output current         | I <sub>OLAV</sub>    | —                     | 4                     | mA   | *4                                    |
| "L" level maximum overall output current | ΣI <sub>OL</sub>     | —                     | 100                   | mA   | *4                                    |
| "L" level average overall output current | ΣI <sub>OLAV</sub>   | —                     | 50                    | mA   | *4                                    |
| "H" level maximum output current         | I <sub>OH</sub>      | —                     | -15                   | mA   | *4                                    |
| "H" level average output current         | I <sub>OHAV</sub>    | —                     | -4                    | mA   | *4                                    |
| "H" level maximum overall output current | ΣI <sub>OH</sub>     | —                     | -100                  | mA   | *4                                    |
| "H" level average overall output current | ΣI <sub>OHAV</sub>   | —                     | -50                   | mA   | *4                                    |
| Power consumption                        | P <sub>D</sub>       | —                     | 454                   | mW   |                                       |
| Operating temperature                    | T <sub>A</sub>       | -40                   | +105                  | °C   |                                       |
|  |                      | -40                   | +125                  | °C   | *6                                    |
| Storage temperature                      | T <sub>STG</sub>     | -55                   | +150                  | °C   |                                       |

(Continued)

(Continued)

- \*1: This parameter is based on  $V_{SS} = AV_{SS} = 0\text{ V}$
- \*2: Set  $AV_{CC}$  and  $V_{CC}$  to the same voltage. Make sure that  $AV_{CC}$  does not exceed  $V_{CC}$  and that the voltage at the analog inputs does not exceed  $AV_{CC}$  when the power is switched on.
- \*3:  $V_I$  and  $V_O$  should not exceed  $V_{CC} + 0.3\text{ V}$ .  $V_I$  should not exceed the specified ratings. However if the maximum current to/from an input is limited by some means with external components, the  $I_{CLAMP}$  rating supersedes the  $V_I$  rating.
- \*4: Applicable to pins: P00 to P07, P10 to P17, P20 to P25, P30 to P37, P40 to P45, P50 to P56, P60 to P67
- \*5: Applicable to pins: P00 to P07, P10 to P17, P20 to P25, P30 to P37, P40 to P45, P50 to P56 (for evaluation device : P50 to P55) , P60 to P67
  - " Use within recommended operating conditions.
  - " Use at DC voltage (current)
  - " The +B signal should always be applied a connecting limit resistance between the +B signal and the microcontroller.
  - " The value of the limiting resistance should be set so that when the +B signal is applied the input current to the microcontroller pin does not exceed rated values, either instantaneously or for prolonged periods.
  - " Note that when the microcontroller drive current is low, such as in the power saving modes, the +B input potential may pass through the protective diode and increase the potential at the  $V_{CC}$  pin, and this may affect other devices.
  - " Note that if a +B signal is input when the microcontroller power supply is off (not fixed at 0 V) , the power supply is provided from the pins, so that incomplete operation may result.
  - " Note that if the +B input is applied during power-on, the power supply is provided from the pins and the resulting power supply voltage may not be sufficient to operate the power-on reset.
  - " Care must be taken not to leave the +B input pin open.
  - " Recommended circuit sample:

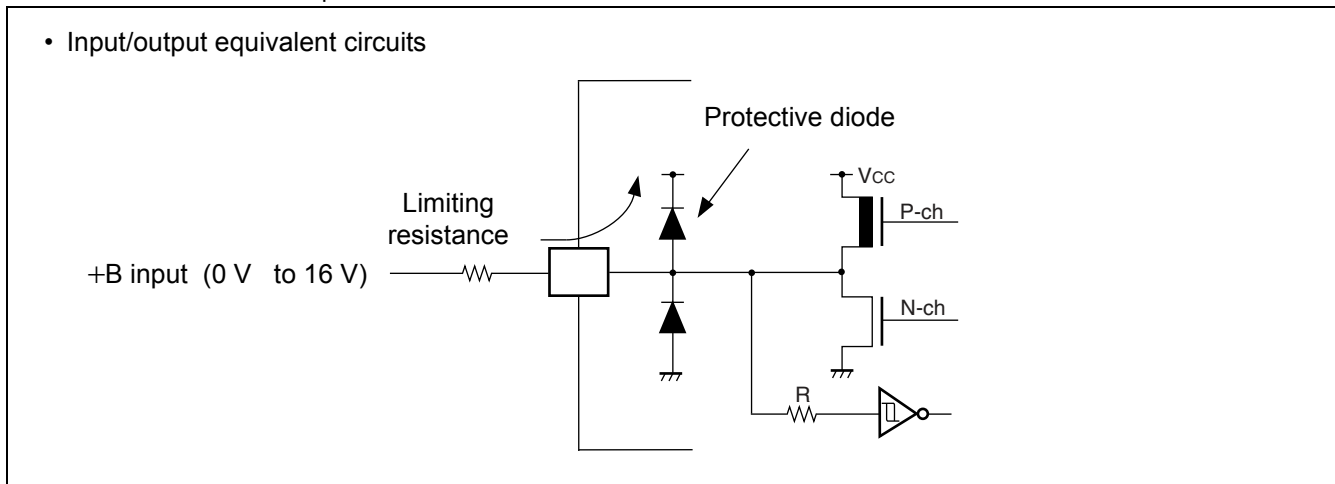

\*6 : If used exceeding  $T_A = +105^\circ\text{C}$ , be sure to contact Cypress for reliability limitations.


**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

**13.2 Recommended Operating Conditions**

( $V_{SS} = AV_{SS} = 0\text{ V}$ )

| Parameter             | Symbol            | Value |     |      | Unit               | Remarks  |
|-----------------------|-------------------|-------|-----|------|--------------------|--|
|                       |                   | Min   | Typ | Max  |                    |  |
| Power supply voltage  | $V_{CC}, AV_{CC}$ | 4.0   | 5.0 | 5.5  | V                  | Under normal operation   |
|                       |                   | 3.5   | 5.0 | 5.5  | V                  | Under normal operation, when not using the A/D converter and not Flash programming.  |
|                       |                   | 4.5   | 5.0 | 5.5  | V                  | When External bus is used.   |
|                       |                   | 3.0   | —   | 5.5  | V                  | Maintains RAM data in stop mode  |
| Smoothing capacitor   | $C_S$             | 0.1   | —   | 1.0  | $\mu\text{F}$      | Use a ceramic capacitor or comparable capacitor of the AC characteristics. Bypass capacitor at the $V_{CC}$ pin should be greater than this capacitor. |
| Operating temperature | $T_A$             | -40   | —   | +125 | $^{\circ}\text{C}$ | *  |

\* : If used exceeding  $T_A = +105^{\circ}\text{C}$ , be sure to contact Cypress for reliability limitations.

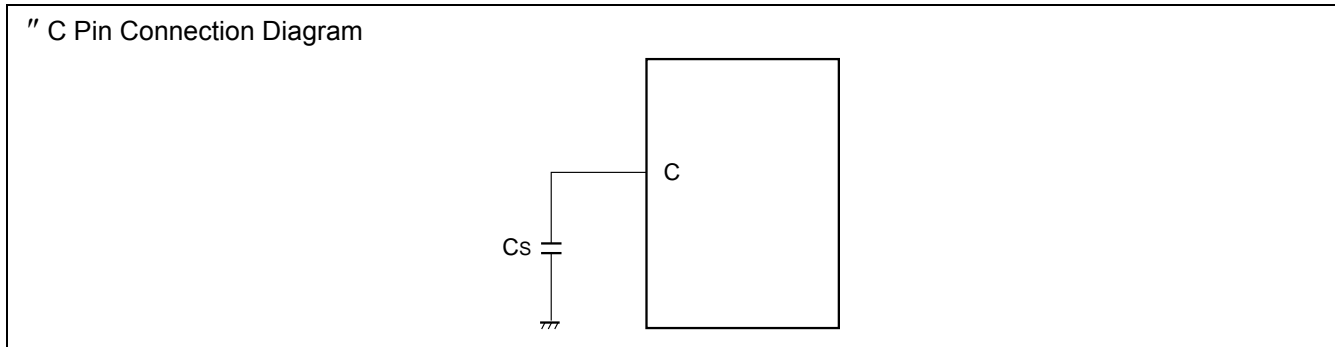

**WARNING:** The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure. No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their representatives beforehand.

**13.3 DC Characteristics**
 $(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 

| Parameter   | Symbol    | Pin                              | Condition  | Value          |     |                | Unit | Remarks  |
|---|-----------|----------------------------------|--|----------------|-----|----------------|------|--|
|   |           |                                  |  | Min            | Typ | Max            |      |  |
| "H" level input voltage<br>(At $V_{CC} = 5\text{ V} \pm 10\%$ ) | $V_{IHS}$ | —                                | —  | $0.8 V_{CC}$   | —   | $V_{CC} + 0.3$ | V    | Pin inputs if CMOS hysteresis input levels are selected (except P12, P15, P44, P45, P50) |
|   | $V_{IHA}$ | —                                | —  | $0.8 V_{CC}$   | —   | $V_{CC} + 0.3$ | V    | Pin inputs if Automotive input levels are selected                                       |
|   | $V_{IHT}$ | —                                | —  | 2.0            | —   | $V_{CC} + 0.3$ | V    | Pin inputs if TTL input levels are selected  |
|   | $V_{IHS}$ | —                                | —  | $0.7 V_{CC}$   | —   | $V_{CC} + 0.3$ | V    | P12, P15, P50 inputs if CMOS input levels are selected                                   |
|   | $V_{IHI}$ | —                                | —  | $0.7 V_{CC}$   | —   | $V_{CC} + 0.3$ | V    | P44, P45 inputs if CMOS hysteresis input levels are selected                             |
|   | $V_{IHR}$ | —                                | —  | $0.8 V_{CC}$   | —   | $V_{CC} + 0.3$ | V    | $\overline{\text{RST}}$ input pin (CMOS hysteresis)                                      |
|   | $V_{IHM}$ | —                                | —  | $V_{CC} - 0.3$ | —   | $V_{CC} + 0.3$ | V    | MD input pin   |
| "L" level input voltage<br>(At $V_{CC} = 5\text{ V} \pm 10\%$ ) | $V_{ILS}$ | —                                | —  | $V_{SS} - 0.3$ | —   | $0.2 V_{CC}$   | V    | Pin inputs if CMOS hysteresis input levels are selected (except P12, P15, P44, P45, P50) |
|   | $V_{ILA}$ | —                                | —  | $V_{SS} - 0.3$ | —   | $0.5 V_{CC}$   | V    | Pin inputs if Automotive input levels are selected                                       |
|   | $V_{ILT}$ | —                                | —  | $V_{SS} - 0.3$ | —   | 0.8            | V    | Pin inputs if TTL input levels are selected  |
|   | $V_{ILS}$ | —                                | —  | $V_{SS} - 0.3$ | —   | $0.3 V_{CC}$   | V    | P12, P15, P50 inputs if CMOS input levels are selected                                   |
|   | $V_{ILI}$ | —                                | —  | $V_{SS} - 0.3$ | —   | $0.3 V_{CC}$   | V    | P44, P45 inputs if CMOS hysteresis input levels are selected                             |
|   | $V_{ILR}$ | —                                | —  | $V_{SS} - 0.3$ | —   | $0.2 V_{CC}$   | V    | $\overline{\text{RST}}$ input pin (CMOS hysteresis)                                      |
|   | $V_{ILM}$ | —                                | —  | $V_{SS} - 0.3$ | —   | $V_{SS} + 0.3$ | V    | MD input pin   |
| Output "H" voltage  | $V_{OH}$  | Normal outputs                   | $V_{CC} = 4.5\text{ V}, I_{OH} = -4.0\text{ mA}$ | $V_{CC} - 0.5$ | —   | —              | V    |  |
| Output "H" voltage  | $V_{OHI}$ | I <sup>2</sup> C current outputs | $V_{CC} = 4.5\text{ V}, I_{OH} = -3.0\text{ mA}$ | $V_{CC} - 0.5$ | —   | —              | V    |  |

*(Continued)*

$(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 

| Parameter            | Symbol  | Pin   | Condition   | Value |     |     | Unit             | Remarks                     |
|----------------------|---|---|---|-------|-----|-----|------------------|-----------------------------|
|                      |   |   |   | Min   | Typ | Max |                  |                             |
| Output "L" voltage   | $V_{OL}$  | Normal outputs  | $V_{CC} = 4.5\text{ V}$ ,<br>$I_{OL} = 4.0\text{ mA}$                                 | –     | –   | 0.4 | V                |                             |
| Output "L" voltage   | $V_{OLI}$   | I <sup>2</sup> C current outputs  | $V_{CC} = 4.5\text{ V}$ ,<br>$I_{OL} = 3.0\text{ mA}$                                 | –     | –   | 0.4 | V                |                             |
| Input leak current   | $I_{IL}$  | –   | $V_{CC} = 5.5\text{ V}$ ,<br>$V_{SS} < V_I < V_{CC}$                                  | – 1   | –   | + 1 | $\mu\text{A}$    |                             |
| Pull-up resistance   | $R_{UP}$  | P00 to P07,<br>P10 to P17,<br>P20 to P25,<br>P30 to P37,<br>$\overline{\text{RST}}$ | –   | 25    | 50  | 100 | $\text{k}\Omega$ |                             |
| Pull-down resistance | $R_{DOWN}$  | MD2   | –   | 25    | 50  | 100 | $\text{k}\Omega$ | Except Flash memory devices |
| Power supply current | $I_{CC}$  | $V_{CC}$  | $V_{CC} = 5.0\text{ V}$ ,<br>Internal frequency : 24 MHz,<br>At normal operation.     | –     | 48  | 60  | mA               |                             |
|                      |   |   | $V_{CC} = 5.0\text{ V}$ ,<br>Internal frequency : 24 MHz,<br>At writing Flash memory. | –     | 53  | 65  | mA               | Flash memory devices        |
|                      |   |   | $V_{CC} = 5.0\text{ V}$ ,<br>Internal frequency : 24 MHz,<br>At erasing Flash memory. | –     | 58  | 70  | mA               | Flash memory devices        |
|                      | $I_{CCS}$   |   | $V_{CC} = 5.0\text{ V}$ ,<br>Internal frequency : 24 MHz,<br>At Sleep mode.           | –     | 25  | 35  | mA               |                             |
|                      | $I_{CTS}$   |   | $V_{CC} = 5.0\text{ V}$ ,<br>Internal frequency : 2 MHz,<br>At Main Timer mode        | –     | 0.3 | 0.8 | mA               | Devices without "T"-suffix  |
|                      |   |   | –   | –     | 0.4 | 1.0 | mA               | Devices with "T"-suffix     |
| $I_{CTSPLL6}$        | $V_{CC} = 5.0\text{ V}$ ,<br>Internal frequency : 24 MHz,<br>At PLL Timer mode,<br>external frequency = 4 MHz | –   | 4   | 7     | mA  |     |                  |                             |

*(Continued)*

$(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 

| Parameter               | Sym-<br>bol      | Pin             | Condition   | Value |     |     | Unit | Remarks  |
|-------------------------|------------------|-----------------|---|-------|-----|-----|------|--|
|                         |                  |                 |   | Min   | Typ | Max |      |  |
| Power supply<br>current | I <sub>CCL</sub> | V <sub>CC</sub> | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During stopping clock<br>supervisor,<br>At sub clock operation<br>T <sub>A</sub> = +25°C  | —     | 70  | 140 | μA   | MB90351E<br>MB90F351E<br>MB90352E<br>MB90F352E<br>MB90356E<br>MB90F356E<br>MB90357E<br>MB90F357E         |
|                         |                  |                 | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During operating clock<br>supervisor,<br>At sub clock operation<br>T <sub>A</sub> = +25°C | —     | 100 | 200 | μA   | MB90356E<br>MB90F356E<br>MB90357E<br>MB90F357E   |
|                         |                  |                 | V <sub>CC</sub> = 5.0 V,<br>Internal CR oscillation/<br>4 division,<br>At sub clock operation<br>T <sub>A</sub> = +25°C                             | —     | 100 | 200 | μA   | MB90356ES<br>MB90F356ES<br>MB90357ES<br>MB90F357ES   |
|                         |                  |                 | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During stopping clock<br>supervisor,<br>At sub clock operation<br>T <sub>A</sub> = +25°C  | —     | 120 | 240 | μA   | MB90351TE<br>MB90F351TE<br>MB90352TE<br>MB90F352TE<br>MB90356TE<br>MB90F356TE<br>MB90357TE<br>MB90F357TE |
|                         |                  |                 | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During operating clock<br>supervisor,<br>At sub clock operation<br>T <sub>A</sub> = +25°C | —     | 150 | 300 | μA   | MB90356TE<br>MB90F356TE<br>MB90357TE<br>MB90F357TE   |
|                         |                  |                 | V <sub>CC</sub> = 5.0 V,<br>Internal CR oscillation/<br>4 division,<br>At sub clock operation<br>T <sub>A</sub> = +25°C                             | —     | 150 | 300 | μA   | MB90356TES<br>MB90F356TES<br>MB90357TES<br>MB90F357TES   |

*(Continued)*



$(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 

| Parameter            | Sym-bol           | Pin             | Condition  | Value |     |     | Unit | Remarks  |
|----------------------|-------------------|-----------------|--|-------|-----|-----|------|--|
|                      |                   |                 |  | Min   | Typ | Max |      |  |
| Power supply current | I <sub>CCLS</sub> | V <sub>CC</sub> | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During stopping clock supervisor,<br>At sub sleep<br>T <sub>A</sub> = +25°C  | —     | 20  | 50  | μA   | MB90351E<br>MB90F351E<br>MB90352E<br>MB90F352E<br>MB90356E<br>MB90F356E<br>MB90357E<br>MB90F357E         |
|                      |                   |                 | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During operating clock supervisor,<br>At sub sleep<br>T <sub>A</sub> = +25°C | —     | 60  | 200 | μA   | MB90356E<br>MB90F356E<br>MB90357E<br>MB90F357E   |
|                      |                   |                 | V <sub>CC</sub> = 5.0 V,<br>Internal CR oscillation/<br>4 division,<br>At sub sleep<br>T <sub>A</sub> = +25°C                          | —     | 60  | 200 | μA   | MB90356ES<br>MB90F356ES<br>MB90357ES<br>MB90F357ES   |
|                      |                   |                 | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>At sub sleep<br>T <sub>A</sub> = +25°C                                       | —     | 70  | 150 | μA   | MB90351TE<br>MB90F351TE<br>MB90352TE<br>MB90F352TE<br>MB90356TE<br>MB90F356TE<br>MB90357TE<br>MB90F357TE |
|                      |                   |                 | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During operating clock supervisor,<br>At sub sleep<br>T <sub>A</sub> = +25°C | —     | 110 | 300 | μA   | MB90356TE<br>MB90F356TE<br>MB90357TE<br>MB90F357TE   |
|                      |                   |                 | V <sub>CC</sub> = 5.0 V,<br>Internal CR oscillation/<br>4 division,<br>At sub sleep<br>T <sub>A</sub> = +25°C                          | —     | 110 | 300 | μA   | MB90356TES<br>MB90F356TES<br>MB90357TES<br>MB90F357TES   |

*(Continued)*

(Continued)

 $(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 

| Parameter            | Symbol  | Pin   | Condition   | Value |     |                               | Unit | Remarks  |
|----------------------|---|---|---|-------|-----|-------------------------------|------|--|
|                      |   |   |   | Min   | Typ | Max                           |      |  |
| Power supply current | I <sub>CCT</sub>  | V <sub>CC</sub>   | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During stopping clock supervisor,<br>At watch mode<br>T <sub>A</sub> = +25°C  | —     | 10  | 35                            | μA   | MB90351E<br>MB90F351E<br>MB90352E<br>MB90F352E<br>MB90356E<br>MB90F356E<br>MB90357E<br>MB90F357E         |
|                      |   |   | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During operating clock supervisor,<br>At watch mode<br>T <sub>A</sub> = +25°C | —     | 25  | 150                           | μA   | MB90356E<br>MB90F356E<br>MB90357E<br>MB90F357E   |
|                      |   |   | V <sub>CC</sub> = 5.0 V,<br>Internal CR oscillation/<br>4 division,<br>At watch mode<br>T <sub>A</sub> = +25°C                          | —     | 25  | 150                           | μA   | MB90356ES<br>MB90F356ES<br>MB90357ES<br>MB90F357ES   |
|                      |   |   | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During stopping clock supervisor,<br>At watch mode<br>T <sub>A</sub> = +25°C  | —     | 60  | 140                           | μA   | MB90351TE<br>MB90F351TE<br>MB90352TE<br>MB90F352TE<br>MB90356TE<br>MB90F356TE<br>MB90357TE<br>MB90F357TE |
|                      |   |   | V <sub>CC</sub> = 5.0 V,<br>Internal frequency: 8 kHz,<br>During operating clock supervisor,<br>At watch mode<br>T <sub>A</sub> = +25°C | —     | 80  | 250                           | μA   | MB90356TE<br>MB90F356TE<br>MB90357TE<br>MB90F357TE   |
|                      |   |   | V <sub>CC</sub> = 5.0 V,<br>Internal CR oscillation/<br>4 division,<br>At watch mode<br>T <sub>A</sub> = +25°C                          | —     | 80  | 250                           | μA   | MB90356TES<br>MB90F356TES<br>MB90357TES<br>MB90F357TES   |
|                      | V <sub>CC</sub> = 5.0 V,<br>At stop mode,<br>T <sub>A</sub> = +25°C | —   | 7   | 25    | μA  | Devices without<br>"T"-suffix |      |  |
|                      | I <sub>CCH</sub>  |   |   | —     | 60  | 130                           | μA   | Devices with<br>"T"-suffix   |
| Input capacity       | C <sub>IN</sub>   | Other than<br>C, AV <sub>CC</sub> , AV <sub>SS</sub> ,<br>AVRH, V <sub>CC</sub> , V <sub>SS</sub> | —   | —     | 5   | 15                            | pF   |  |

**13.4 AC Characteristics**
**13.4.1 Clock Timing**
 $(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 

| Parameter                      | Symbol             | Pin      | Value |        |     | Unit          | Remarks  |
|--------------------------------|--------------------|----------|-------|--------|-----|---------------|--|
|                                |                    |          | Min   | Typ    | Max |               |  |
| Clock frequency                | $f_C$              | X0, X1   | 3     | —      | 16  | MHz           | 1/2 (at PLL stop)<br>When using an oscillation circuit |
|                                |                    |          | 4     | —      | 16  | MHz           | 1 multiplied PLL<br>When using an oscillation circuit  |
|                                |                    |          | 4     | —      | 12  | MHz           | 2 multiplied PLL<br>When using an oscillation circuit  |
|                                |                    |          | 4     | —      | 8   | MHz           | 3 multiplied PLL<br>When using an oscillation circuit  |
|                                |                    |          | 4     | —      | 6   | MHz           | 4 multiplied PLL<br>When using an oscillation circuit  |
|                                |                    |          | —     | —      | 4   | MHz           | 6 multiplied PLL<br>When using an oscillation circuit  |
|                                |                    | X0       | 3     | —      | 24  | MHz           | 1/2 (at PLL stop),<br>When using an external clock     |
|                                |                    |          | 4     | —      | 24  | MHz           | 1 multiplied PLL<br>When using an external clock       |
|                                |                    |          | 4     | —      | 12  | MHz           | 2 multiplied PLL<br>When using an external clock       |
|                                |                    |          | 4     | —      | 8   | MHz           | 3 multiplied PLL<br>When using an external clock       |
|                                |                    |          | 4     | —      | 6   | MHz           | 4 multiplied PLL<br>When using an external clock       |
|                                |                    |          | —     | —      | 4   | MHz           | 6 multiplied PLL<br>When using an external clock       |
|                                | fCL                | X0A, X1A | —     | 32.768 | 100 | kHz           | When using sub clock                                   |
| Clock cycle time               | $t_{CYL}$          | X0, X1   | 62.5  | —      | 333 | ns            | When using an oscillation circuit                      |
|                                |                    | X0       | 41.67 | —      | 333 | ns            | When using an external clock                           |
|                                | $t_{CYLL}$         | X0A, X1A | 10    | 30.5   | —   | $\mu\text{s}$ |  |
| Input clock pulse width        | $P_{WH}, P_{WL}$   | X0       | 10    | —      | —   | ns            | Duty ratio should be about<br>30% to 70%.              |
|                                | $P_{WHL}, P_{WLL}$ | X0A      | 5     | 15.2   | —   | $\mu\text{s}$ |  |
| Input clock rise and fall time | $t_{CR}, t_{CF}$   | X0       | —     | —      | 5   | ns            | When using an external clock                           |


*(Continued)*

(Continued)


( $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

| Parameter   | Symbol    | Pin | Value |       |     | Unit          | Remarks               |
|---|-----------|-----|-------|-------|-----|---------------|-----------------------|
|   |           |     | Min   | Typ   | Max |               |                       |
| Internal operating clock frequency (machine clock)  | $f_{CP}$  | —   | 1.5   | —     | 24  | MHz           | When using main clock |
|   | $f_{CPL}$ | —   | —     | 8.192 | 50  | kHz           | When using sub clock  |
| Internal operating clock cycle time (machine clock) | $t_{CP}$  | —   | 41.67 | —     | 666 | ns            | When using main clock |
|   | $t_{CPL}$ | —   | 20    | 122.1 | —   | $\mu\text{s}$ | When using sub clock  |


\*: The limitation is in the range of the clock frequency when PLL is used. Use within the range in graph of “· PLL guaranteed operation range External clock frequency and internal operation clock frequency”.

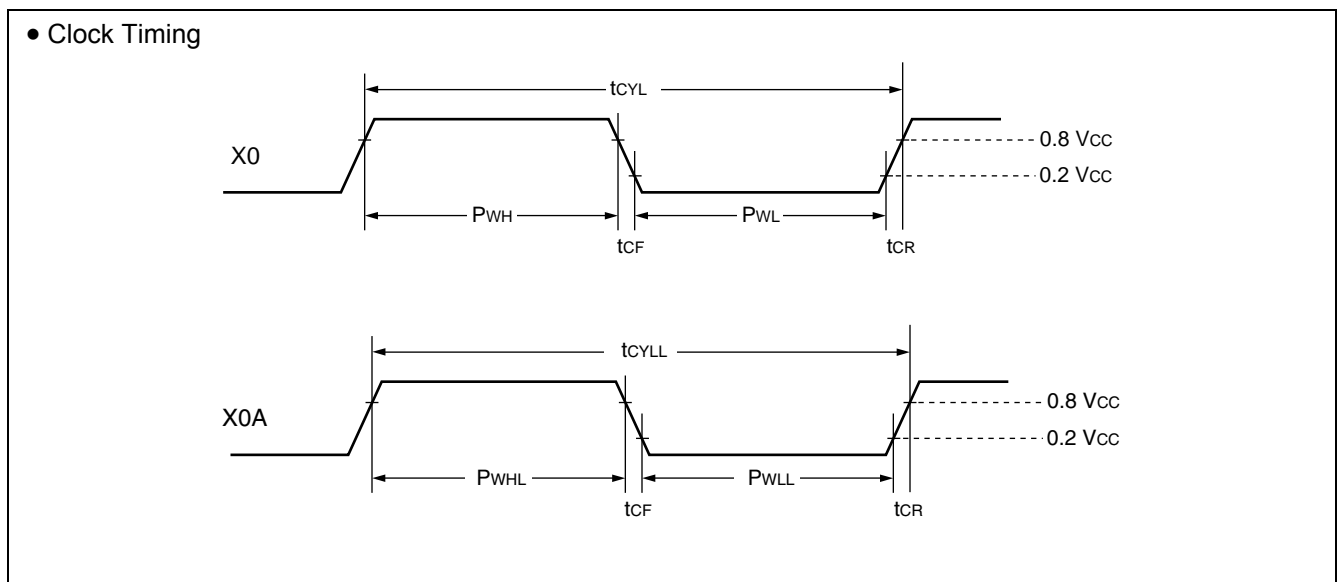

• PLL guaranteed operation range

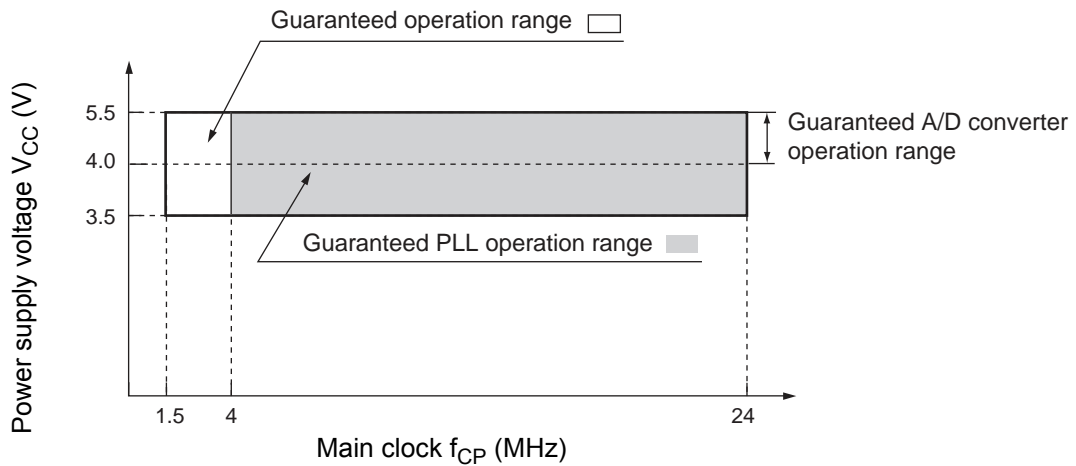

**Guaranteed operation range of MB90350E series**

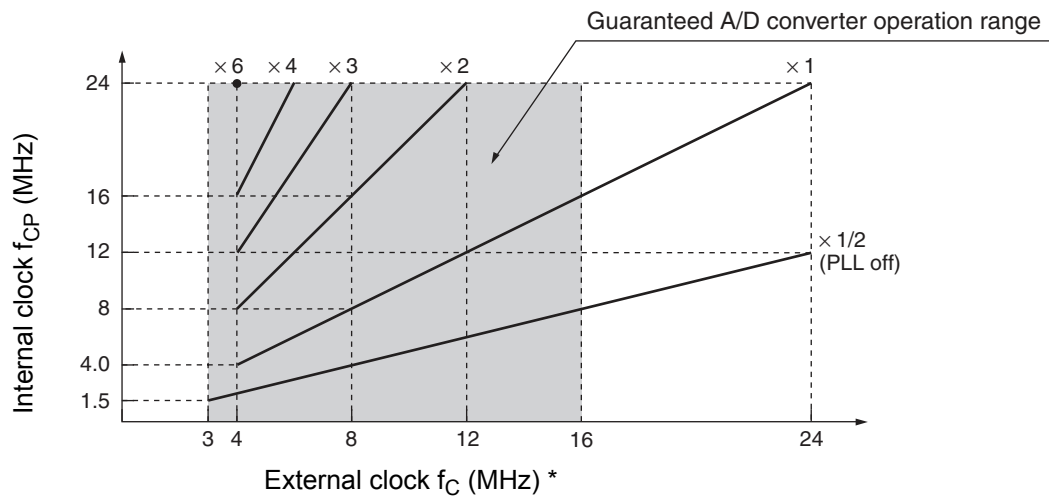

\* : When using crystal oscillator or ceramic oscillator, the maximum clock frequency is 16 MHz.


**External clock frequency and internal operation clock frequency**

13.4.2 Reset Standby Input

( $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

| Parameter        | Symbol     | Pin                     | Value   |     | Unit          | Remarks                               |   |
|------------------|------------|-------------------------|---|-----|---------------|---------------------------------------|---|
|                  |            |                         | Min   | Max |               |                                       |   |
| Reset input time | $t_{RSTL}$ | $\overline{\text{RST}}$ | 500   | –   | ns            | Under normal operation                |   |
|                  |            |                         | Oscillation time of oscillator* + 100 $\mu\text{s}$ |     | –             | $\mu\text{s}$                         | In Stop mode, Sub Clock mode, Sub Sleep mode and Watch mode |
|                  |            |                         | 100   | –   | $\mu\text{s}$ | In Main timer mode and PLL timer mode |   |


\* : Oscillation time of oscillator is the time that the amplitude reaches 90%. In the crystal oscillator, the oscillation time is between several ms to tens of ms. In ceramic oscillators, the oscillation time is between hundreds of  $\mu\text{s}$  to several ms. With an external clock, the oscillation time is 0 ms.

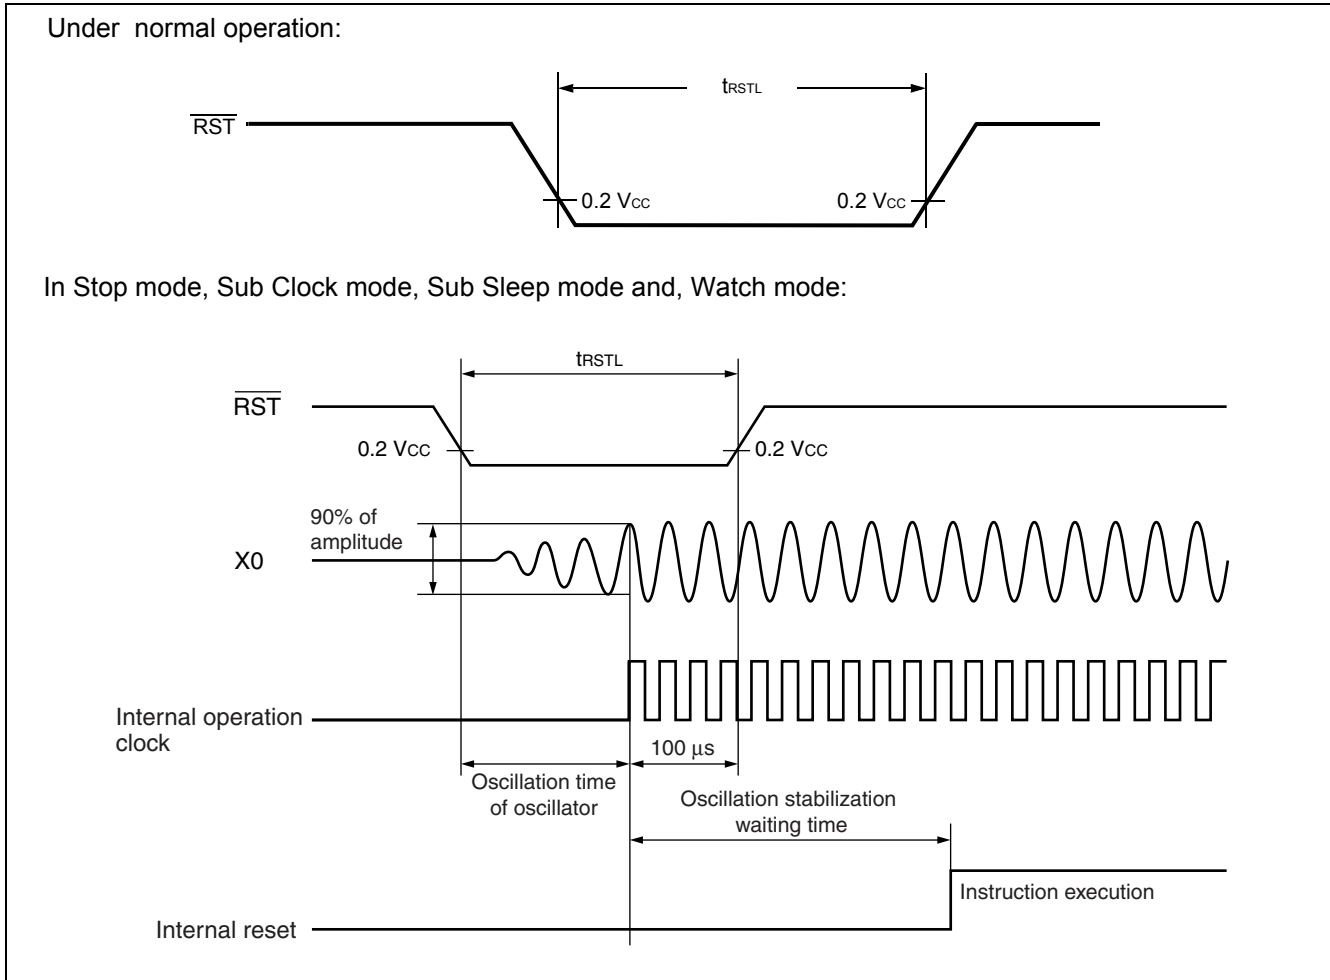


13.4.3 Power On Reset

( $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

| Parameter          | Symbol    | Pin      | Condition | Value |     | Unit | Remarks                     |
|--------------------|-----------|----------|-----------|-------|-----|------|-----------------------------|
|                    |           |          |           | Min   | Max |      |                             |
| Power on rise time | $t_R$     | $V_{CC}$ | -         | 0.05  | 30  | ms   |                             |
| Power off time     | $t_{OFF}$ | $V_{CC}$ |           | 1     | -   | ms   | Waiting time until power-on |

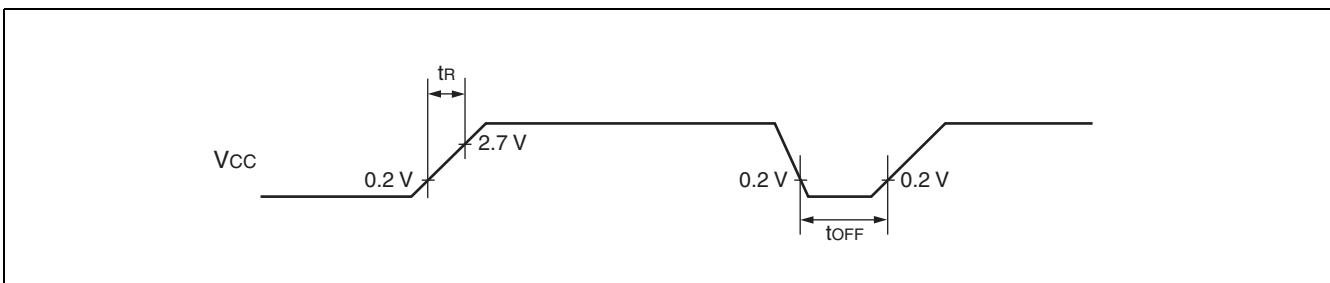


Note : If you change the power supply voltage too rapidly, a power on reset may occur. We recommend that you start up smoothly by restraining voltages when changing the power supply voltage during operation, as shown in the figure below. Perform while not using the PLL clock. However, if voltage drops are within 1 V/s, you can operate while using the PLL clock.

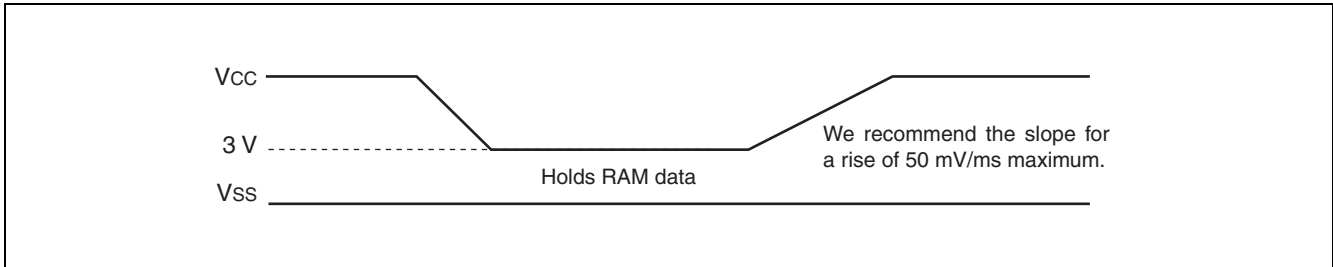

### 13.4.4 Clock Output Timing

( $T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $f_{CP} \leq 24\text{ MHz}$ )

| Parameter                         | Symbol     | Pin | Condition | Value |     | Unit | Remarks                  |
|-----------------------------------|------------|-----|-----------|-------|-----|------|--------------------------|
|                                   |            |     |           | Min   | Max |      |                          |
| Cycle time                        | $t_{CYC}$  | CLK | —         | 62.5  | —   | ns   | $f_{CP} = 16\text{ MHz}$ |
|                                   |            |     |           | 41.67 | —   | ns   | $f_{CP} = 24\text{ MHz}$ |
| CLK $\uparrow$ → CLK $\downarrow$ | $t_{CHCL}$ | CLK | —         | 20    | —   | ns   | $f_{CP} = 16\text{ MHz}$ |
|                                   |            |     |           | 13    | —   | ns   | $f_{CP} = 24\text{ MHz}$ |

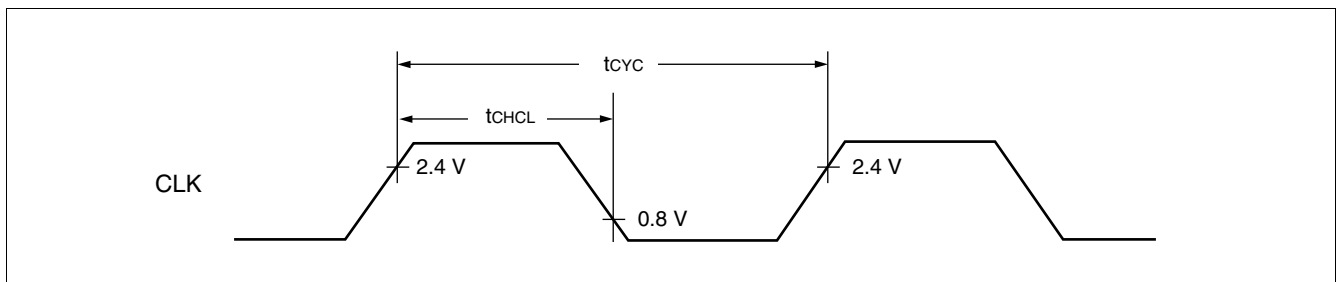


**13.4.5 Bus Timing (Read)**
 $(T_A = -40^{\circ}\text{C to } +105^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, V_{SS} = 0.0\text{ V}, f_{CP} \leq 24\text{ MHz})$ 

| Parameter                              | Symbol     | Pin                                       | Condition | Value                   |                         | Unit |
|--|------------|---|-----------|-------------------------|-------------------------|------|
|  |            |   |           | Min                     | Max                     |      |
| ALE pulse width                        | $t_{LHLL}$ | ALE                                       | —         | $t_{CP}/2 - 10$         | —                       | ns   |
| Valid address → ALE ↓ time             | $t_{AVLL}$ | ALE, A21 to A16, AD15 to AD00             |           | $t_{CP}/2 - 20$         | —                       | ns   |
| ALE ↓ → Address valid time             | $t_{LLAX}$ | ALE, AD15 to AD00                         |           | $t_{CP}/2 - 15$         | —                       | ns   |
| Valid address → $\overline{RD}$ ↓ time | $t_{AVRL}$ | A21 to A16, AD15 to AD00, $\overline{RD}$ |           | $t_{CP} - 15$           | —                       | ns   |
| Valid address → Valid data input       | $t_{AVDV}$ | A21 to A16, AD15 to AD00                  |           | —                       | $5 t_{CP}/2 - 60$       | ns   |
| $\overline{RD}$ pulse width            | $t_{RLRH}$ | $\overline{RD}$                           |           | $(n^*+3/2) t_{CP} - 20$ | —                       | ns   |
| $\overline{RD}$ ↓ → Valid data input   | $t_{RLDV}$ | $\overline{RD}$ , AD15 to AD00            |           | —                       | $(n^*+3/2) t_{CP} - 50$ | ns   |
| $\overline{RD}$ ↑ → Data hold time     | $t_{RHDX}$ | $\overline{RD}$ , AD15 to AD00            |           | 0                       | —                       | ns   |
| $\overline{RD}$ ↑ → ALE ↑ time         | $t_{RHLH}$ | $\overline{RD}$ , ALE                     |           | $t_{CP}/2 - 15$         | —                       | ns   |
| $\overline{RD}$ ↑ → Address valid time | $t_{RHAX}$ | $\overline{RD}$ , A21 to A16              |           | $t_{CP}/2 - 10$         | —                       | ns   |
| Valid address → CLK ↑ time             | $t_{AVCH}$ | A21 to A16, AD15 to AD00, CLK             |           | $t_{CP}/2 - 16$         | —                       | ns   |
| $\overline{RD}$ ↓ → CLK ↑ time         | $t_{RLCH}$ | $\overline{RD}$ , CLK                     |           | $t_{CP}/2 - 15$         | —                       | ns   |
| ALE ↓ → $\overline{RD}$ ↓ time         | $t_{LLRL}$ | ALE, $\overline{RD}$                      |           | $t_{CP}/2 - 15$         | —                       | ns   |

\* : Number of ready cycles




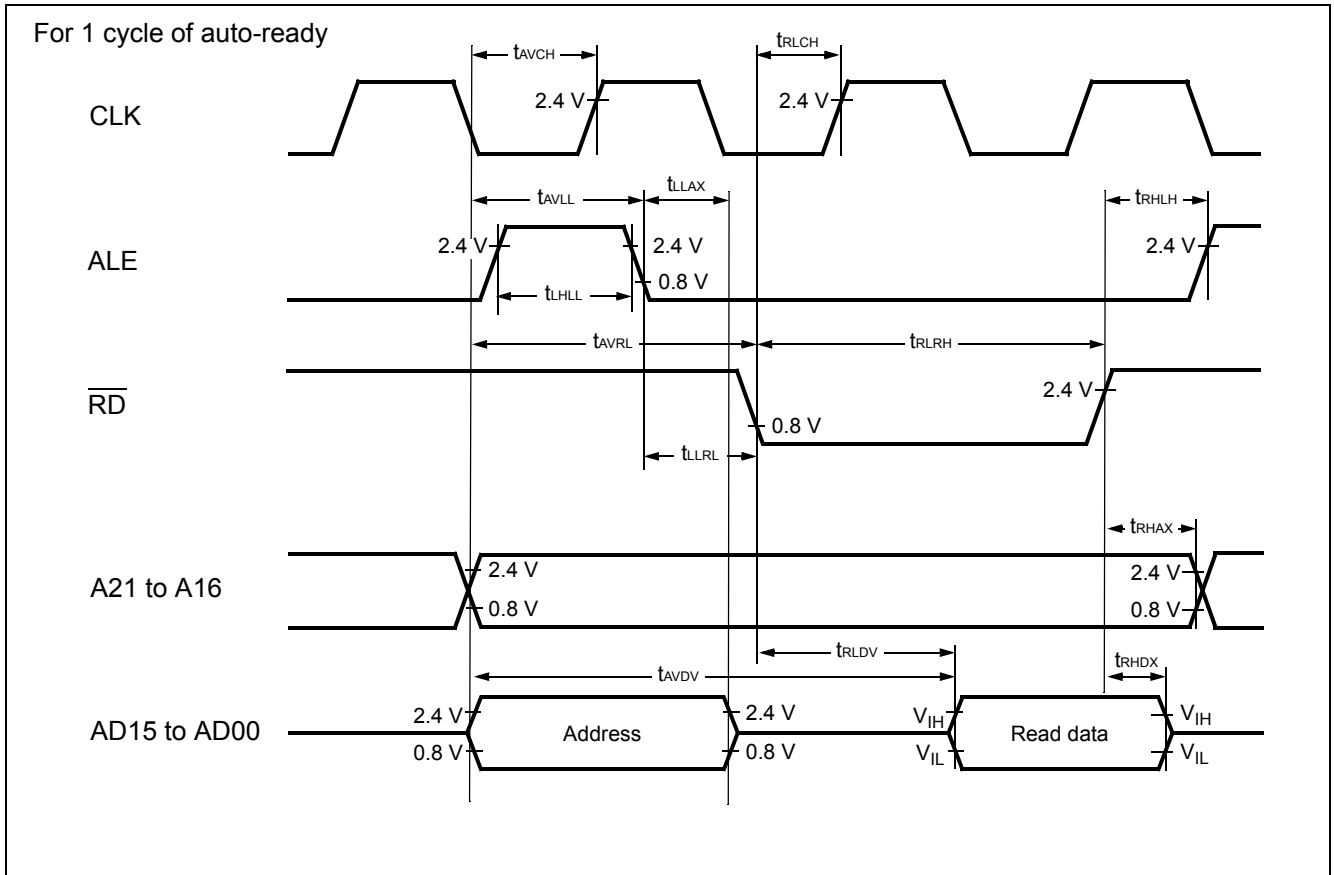

**13.4.6 Bus Timing (Write)**
 $(T_A = -40^{\circ}\text{C to } +105^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, V_{SS} = 0.0\text{ V}, f_{CP} \leq 24\text{ MHz})$ 

| Parameter  | Symbol            | Pin  | Condition | Value                           |     | Unit |
|--|-------------------|--|-----------|---------------------------------|-----|------|
|  |                   |  |           | Min                             | Max |      |
| Valid address $\rightarrow \overline{\text{WR}} \downarrow$ time   | $t_{\text{AVWL}}$ | A21 to A16, AD15 to AD00, $\overline{\text{WR}}$ | -         | $t_{\text{CP}} - 15$            | -   | ns   |
| $\overline{\text{WR}}$ pulse width                                 | $t_{\text{WLWH}}$ | $\overline{\text{WR}}$                           |           | $(n^* + 3/2)t_{\text{CP}} - 20$ | -   | ns   |
| Valid data output $\rightarrow \overline{\text{WR}} \uparrow$ time | $t_{\text{DVWH}}$ | AD15 to AD00, $\overline{\text{WR}}$             |           | $(n^* + 3/2)t_{\text{CP}} - 20$ | -   | ns   |
| $\overline{\text{WR}} \uparrow \rightarrow$ Data hold time         | $t_{\text{WHDX}}$ | AD15 to AD00, $\overline{\text{WR}}$             |           | 15                              | -   | ns   |
| $\overline{\text{WR}} \uparrow \rightarrow$ Address valid time     | $t_{\text{WHAX}}$ | A21 to A16, $\overline{\text{WR}}$               |           | $t_{\text{CP}}/2 - 10$          | -   | ns   |
| $\overline{\text{WR}} \uparrow \rightarrow$ ALE $\uparrow$ time    | $t_{\text{WHLH}}$ | $\overline{\text{WR}}$ , ALE                     |           | $t_{\text{CP}}/2 - 15$          | -   | ns   |
| $\overline{\text{WR}} \downarrow \rightarrow$ CLK $\uparrow$ time  | $t_{\text{WLCH}}$ | $\overline{\text{WR}}$ , CLK                     |           | $t_{\text{CP}}/2 - 15$          | -   | ns   |

\* : Number of ready cycles

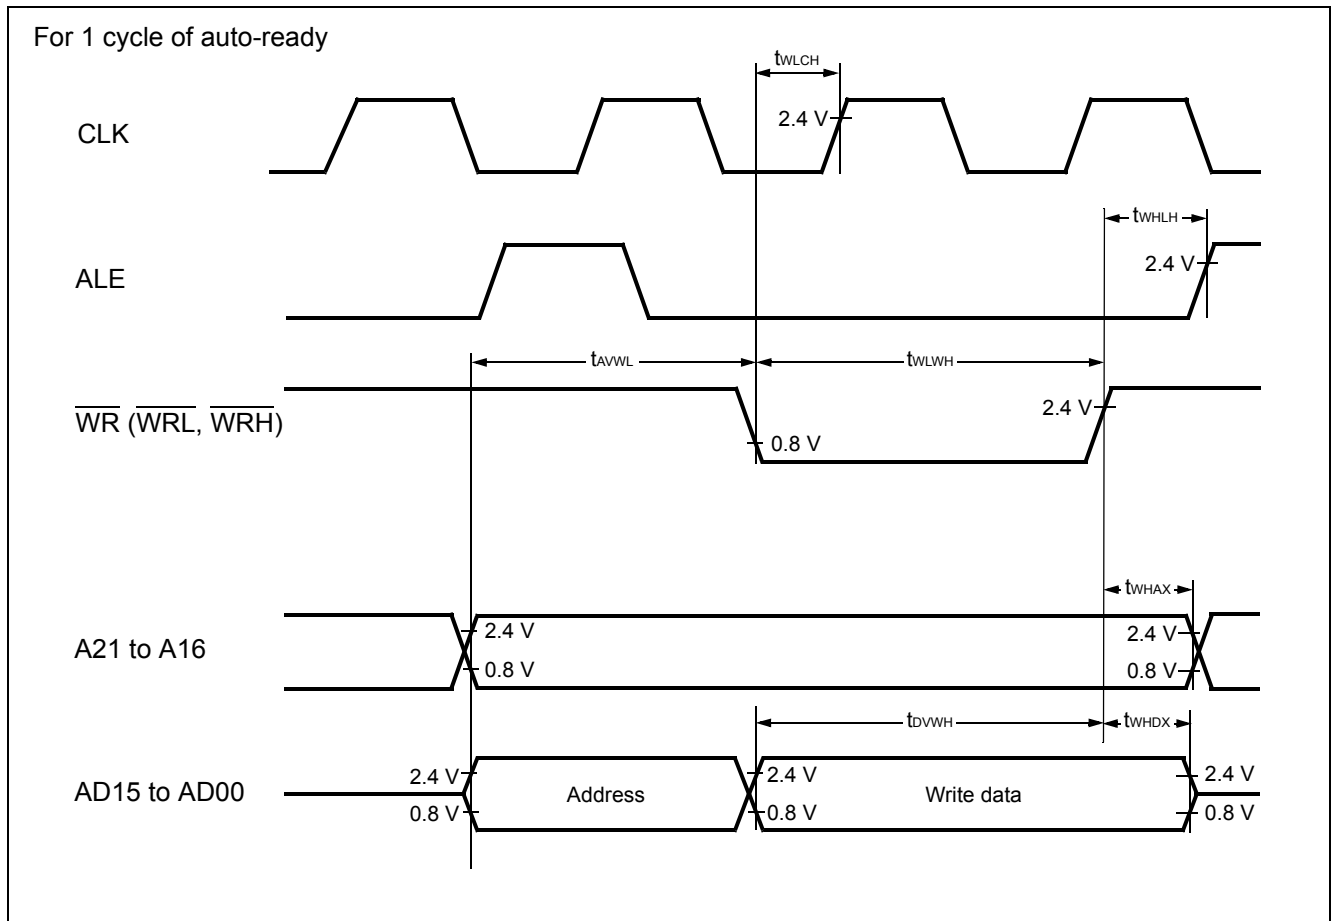


**13.4.7 Ready Input Timing**

( $T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $f_{CP} \leq 24\text{ MHz}$ )

| Parameter       | Symbol     | Pin | Condition | Value |     | Units | Remarks                  |
|-----------------|------------|-----|-----------|-------|-----|-------|--------------------------|
|                 |            |     |           | Min   | Max |       |                          |
| RDY set-up time | $t_{RYHS}$ | RDY | —         | 45    | —   | ns    | $f_{CP} = 16\text{ MHz}$ |
|                 |            |     |           | 32    | —   | ns    | $f_{CP} = 24\text{ MHz}$ |
| RDY hold time   | $t_{RYHH}$ | RDY |           | 0     | —   | ns    |                          |

Note : If the RDY set-up time is insufficient, use the auto-ready function.

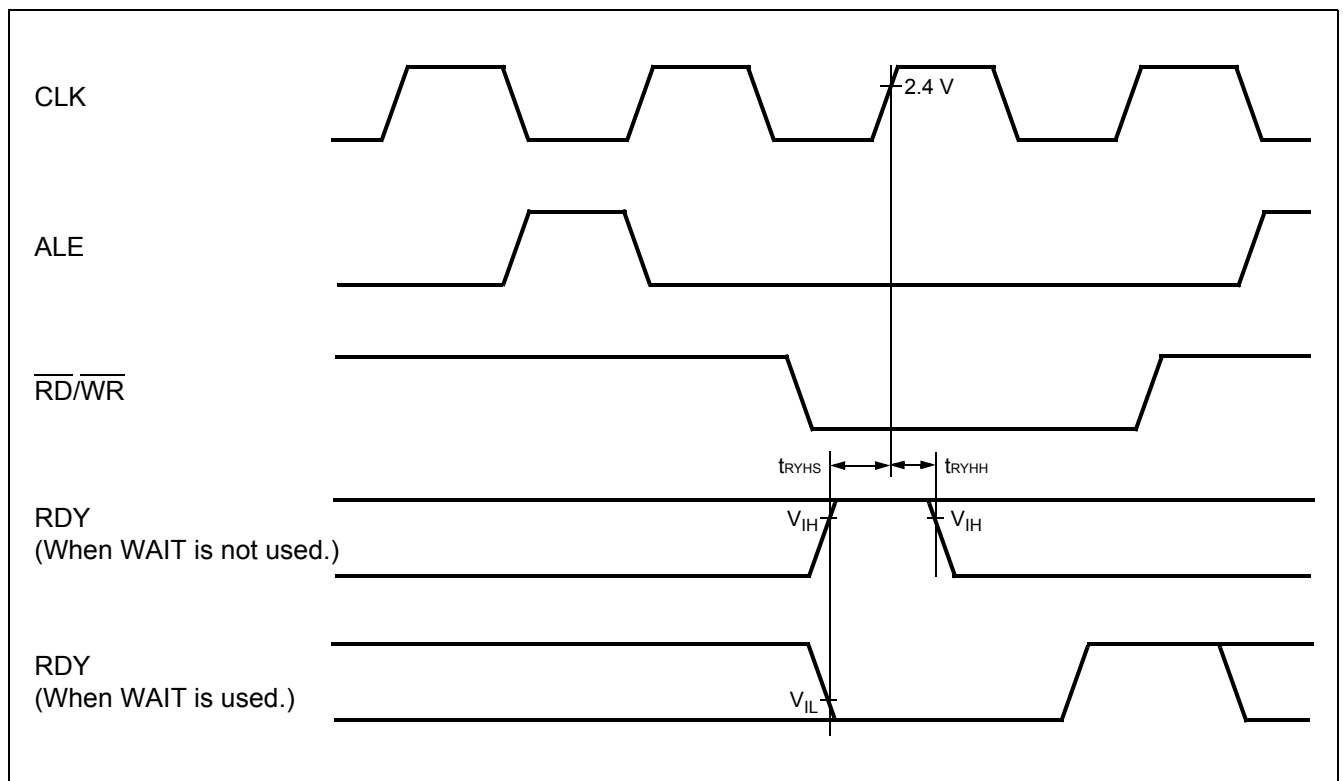


13.4.8 Hold Timing

( $T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $f_{CP} \leq 24\text{ MHz}$ )

| Parameter  | Symbol            | Pin                     | Condition | Value    |            | Units |
|--|-------------------|-------------------------|-----------|----------|------------|-------|
|  |                   |                         |           | Min      | Max        |       |
| Pin floating $\rightarrow$ $\overline{\text{HAK}} \downarrow$ time | $t_{X\text{HAL}}$ | $\overline{\text{HAK}}$ | —         | 30       | $t_{CP}$   | ns    |
| $\overline{\text{HAK}} \uparrow$ time $\rightarrow$ Pin valid time | $t_{\text{HAHV}}$ | $\overline{\text{HAK}}$ |           | $t_{CP}$ | $2 t_{CP}$ | ns    |

Note : There is more than 1 machine cycle from when HRQ pin reads in until the  $\overline{\text{HAK}}$  is changed.

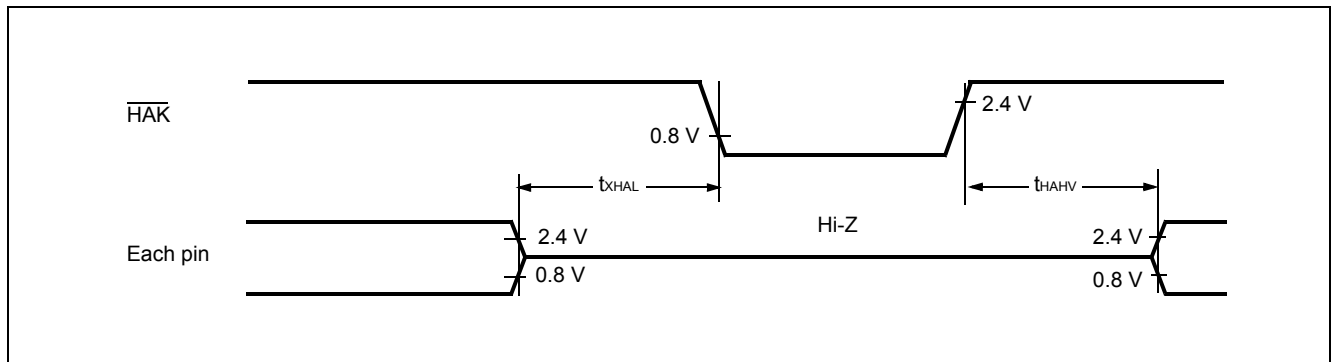



**13.4.9 LIN-UART2/3**
**■ Bit setting: ESCR:SCES = 0, ECCR:SCDE = 0**

 (T<sub>A</sub> = -40°C to +125°C, V<sub>CC</sub> = 5.0 V ± 10%, f<sub>CP</sub> ≤ 24 MHz, V<sub>SS</sub> = 0 V)

| Parameter                    | Symbol             | Pin                      | Condition   | Value                              |                        | Unit |
|------------------------------|--------------------|--------------------------|---|------------------------------------|------------------------|------|
|                              |                    |                          |   | Min                                | Max                    |      |
| Serial clock cycle time      | t <sub>SCYC</sub>  | SCK2, SCK3               | Internal shift clock mode output pins are CL = 80 pF + 1 TTL. | 5 t <sub>CP</sub>                  | —                      | ns   |
| SCK ↓ → SOT delay time       | t <sub>SLOVI</sub> | SCK2, SCK3<br>SOT2, SOT3 |   | -50                                | +50                    | ns   |
| Valid SIN → SCK ↑            | t <sub>IVSHI</sub> | SCK2, SCK3<br>SIN2, SIN3 |   | t <sub>CP</sub> + 80               | —                      | ns   |
| SCK ↑ → Valid SIN hold time  | t <sub>SHIXI</sub> | SCK2, SCK3<br>SIN2, SIN3 |   | 0                                  | —                      | ns   |
| Serial clock "L" pulse width | t <sub>SHSL</sub>  | SCK2, SCK3               | External shift clock mode output pins are CL = 80 pF + 1 TTL. | 3 t <sub>CP</sub> - t <sub>R</sub> | —                      | ns   |
| Serial clock "H" pulse width | t <sub>SLSH</sub>  | SCK2, SCK3               |   | t <sub>CP</sub> + 10               | —                      | ns   |
| SCK ↓ → SOT delay time       | t <sub>SLOVE</sub> | SCK2, SCK3<br>SOT2, SOT3 |   | —                                  | 2 t <sub>CP</sub> + 60 | ns   |
| Valid SIN → SCK ↑            | t <sub>IVSHE</sub> | SCK2, SCK3<br>SIN2, SIN3 |   | 30                                 | —                      | ns   |
| SCK ↑ → Valid SIN hold time  | t <sub>SHIXE</sub> | SCK2, SCK3<br>SIN2, SIN3 |   | t <sub>CP</sub> + 30               | —                      | ns   |
| SCK fall time                | t <sub>F</sub>     | SCK2, SCK3               |   | —                                  | 10                     | ns   |
| SCK rise time                | t <sub>R</sub>     | SCK2, SCK3               |   | —                                  | 10                     | ns   |

- Notes :
- AC characteristic in CLK synchronized mode.
  - C<sub>L</sub> is load capacity value of pins when testing.
  - t<sub>CP</sub> is internal operating clock cycle time (machine clock) . Refer to "Clock Timing".

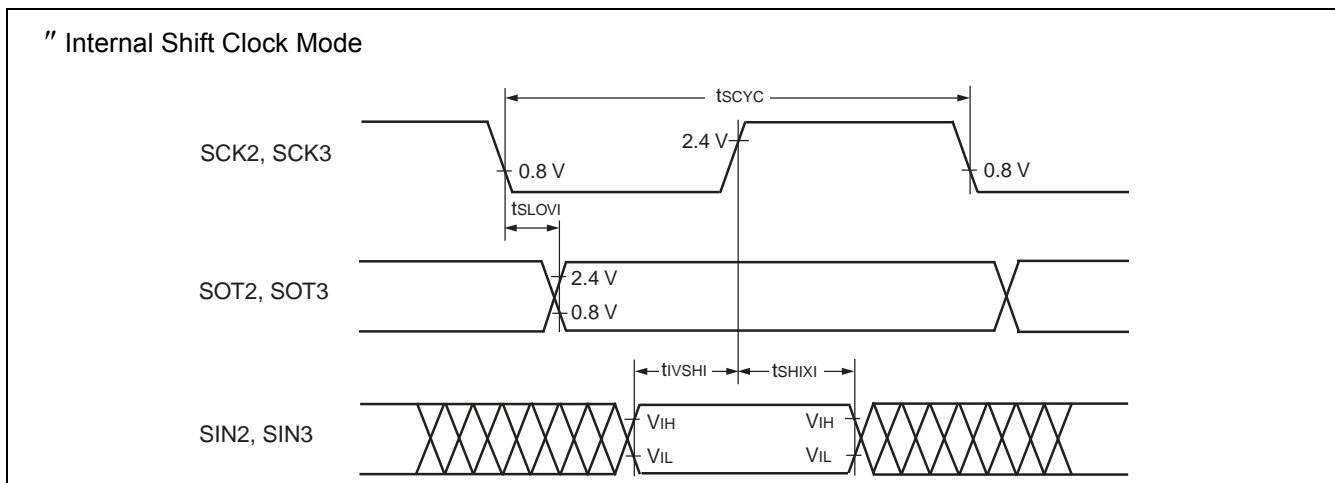

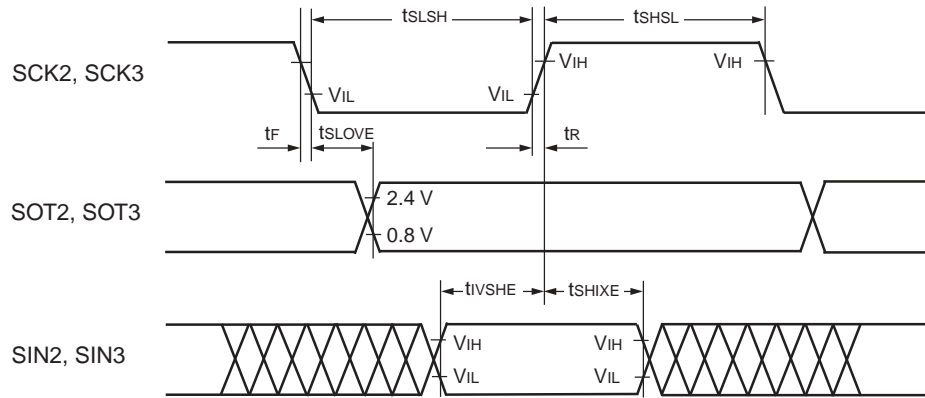**External Shift Clock Mode**


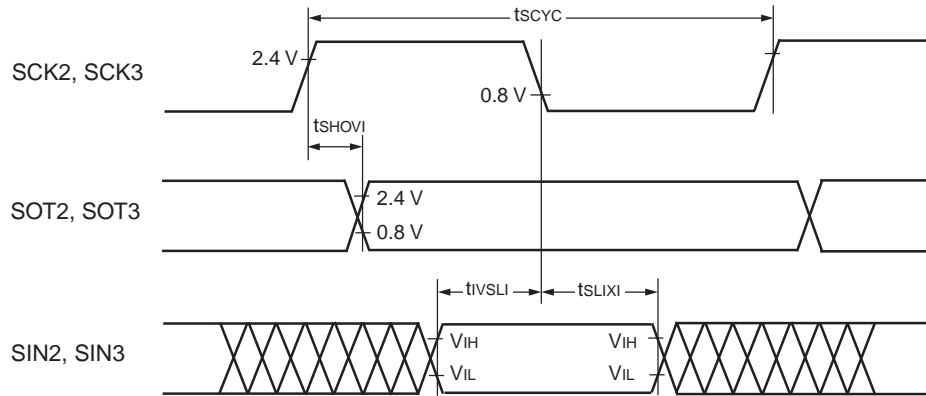
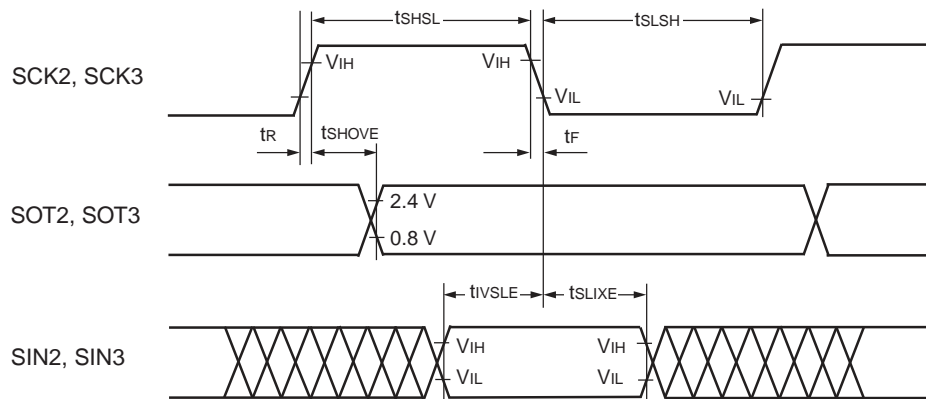
■ Bit setting: ESCR:SCES = 1, ECCR:SCDE = 0

( $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = 0\text{ V}$ )

| Parameter  | Symbol      | Pin                      | Condition  | Value            |                 | Unit |
|--|-------------|--------------------------|--|------------------|-----------------|------|
|  |             |                          |  | Min              | Max             |      |
| Serial clock cycle time                            | $t_{SCYC}$  | SCK2, SCK3               | Internal shift clock mode output pins are $CL = 80\text{ pF} + 1\text{ TTL}$ . | $5 t_{CP}$       | –               | ns   |
| SCK $\uparrow$ $\rightarrow$ SOT delay time        | $t_{SHOVI}$ | SCK2, SCK3<br>SOT2, SOT3 |  | –50              | +50             | ns   |
| Valid SIN $\rightarrow$ SCK $\downarrow$           | $t_{IVSLI}$ | SCK2, SCK3<br>SIN2, SIN3 |  | $t_{CP} + 80$    | –               | ns   |
| SCK $\downarrow$ $\rightarrow$ Valid SIN hold time | $t_{SLIXI}$ | SCK2, SCK3<br>SIN2, SIN3 |  | 0                | –               | ns   |
| Serial clock "H" pulse width                       | $t_{SHSL}$  | SCK2, SCK3               | External shift clock mode output pins are $CL = 80\text{ pF} + 1\text{ TTL}$ . | $3 t_{CP} - t_R$ | –               | ns   |
| Serial clock "L" pulse width                       | $t_{SLSH}$  | SCK2, SCK3               |  | $t_{CP} + 10$    | –               | ns   |
| SCK $\uparrow$ $\rightarrow$ SOT delay time        | $t_{SHOVE}$ | SCK2, SCK3<br>SOT2, SOT3 |  | –                | $2 t_{CP} + 60$ | ns   |
| Valid SIN $\rightarrow$ SCK $\downarrow$           | $t_{IVSLE}$ | SCK2, SCK3<br>SIN2, SIN3 |  | 30               | –               | ns   |
| SCK $\downarrow$ $\rightarrow$ Valid SIN hold time | $t_{SLIXE}$ | SCK2, SCK3<br>SIN2, SIN3 |  | $t_{CP} + 30$    | –               | ns   |
| SCK fall time                                      | $t_F$       | SCK2, SCK3               |  | –                | 10              | ns   |
| SCK rise time                                      | $t_R$       | SCK2, SCK3               |  | –                | 10              | ns   |

Notes : •  $C_L$  is load capacity value of pins when testing.

•  $t_{CP}$  is internal operating clock cycle time (machine clock) . Refer to "Clock Timing".

**• Internal Shift Clock Mode**

**• External Shift Clock Mode**


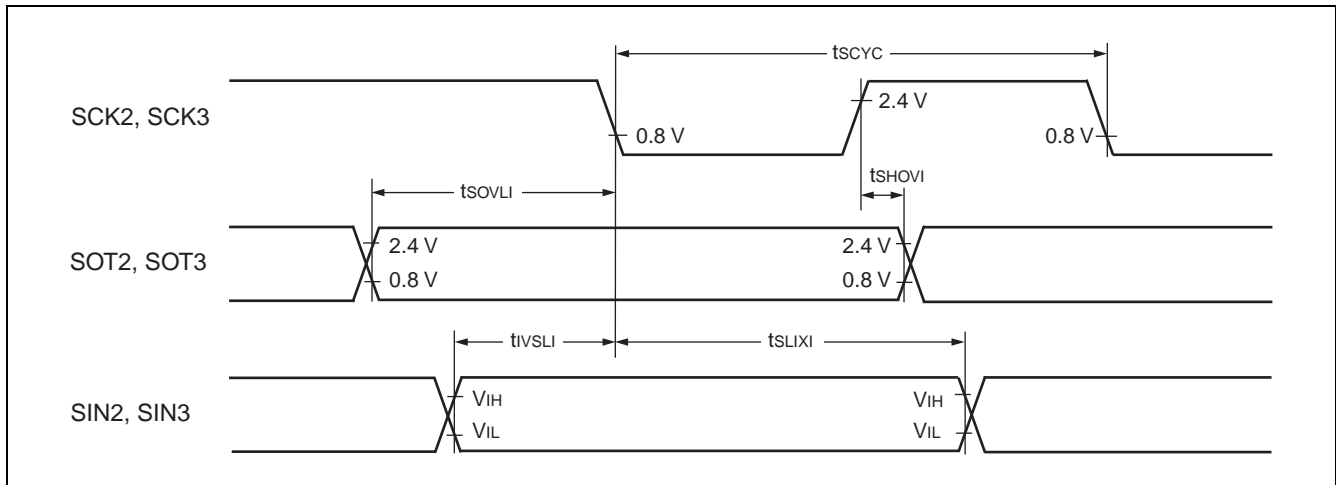
■ Bit setting: ESCR:SCES = 0, ECCR:SCDE = 1

( $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = 0\text{ V}$ )

| Parameter  | Symbol      | Pin                      | Condition   | Value           |     | Unit |
|--|-------------|--------------------------|---|-----------------|-----|------|
|  |             |                          |   | Min             | Max |      |
| Serial clock cycle time                            | $t_{SCYC}$  | SCK2, SCK3               | Internal clock operation output pins are $CL = 80\text{ pF} + 1\text{ TTL}$ . | $5 t_{CP}$      | —   | ns   |
| SCK $\uparrow$ $\rightarrow$ SOT delay time        | $t_{SHOVI}$ | SCK2, SCK3<br>SOT2, SOT3 |   | -50             | +50 | ns   |
| Valid SIN $\rightarrow$ SCK $\downarrow$           | $t_{IVSLI}$ | SCK2, SCK3<br>SIN2, SIN3 |   | $t_{CP} + 80$   | —   | ns   |
| SCK $\downarrow$ $\rightarrow$ Valid SIN hold time | $t_{SLIXI}$ | SCK2, SCK3<br>SIN2, SIN3 |   | 0               | —   | ns   |
| SOT $\rightarrow$ SCK $\downarrow$ delay time      | $t_{SOVLI}$ | SCK2, SCK3<br>SOT2, SOT3 |   | $3 t_{CP} - 70$ | —   | ns   |

Notes : •  $C_L$  is load capacity value of pins when testing.

•  $t_{CP}$  is internal operating clock cycle time (machine clock) . Refer to "Clock Timing".




■ Bit setting: ESCR:SCES = 1, ECCR:SCDE = 1

( $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = 0\text{ V}$ )

| Parameter                                      | Symbol      | Pin                      | Condition  | Value           |     | Unit |
|--|-------------|--------------------------|--|-----------------|-----|------|
|  |             |                          |  | Min             | Max |      |
| Serial clock cycle time                        | $t_{SCYC}$  | SCK2, SCK3               | Internal clock operation out-put pins are $CL = 80\text{ pF} + 1\text{ TTL}$ . | $5 t_{CP}$      | —   | ns   |
| SCK $\downarrow \rightarrow$ SOT delay time    | $t_{SLOVI}$ | SCK2, SCK3<br>SOT2, SOT3 |  | -50             | +50 | ns   |
| Valid SIN $\rightarrow$ SCK $\uparrow$         | $t_{IVSHI}$ | SCK2, SCK3<br>SIN2, SIN3 |  | $t_{CP} + 80$   | —   | ns   |
| SCK $\uparrow \rightarrow$ Valid SIN hold time | $t_{SHIXI}$ | SCK2, SCK3<br>SIN2, SIN3 |  | 0               | —   | ns   |
| SOT $\rightarrow$ SCK $\uparrow$ delay time    | $t_{SOVHI}$ | SCK2, SCK3<br>SOT2, SOT3 |  | $3 t_{CP} - 70$ | —   | ns   |

Notes : •  $C_L$  is load capacity value of pins when testing.


•  $t_{CP}$  is internal operating clock cycle time (machine clock) . Refer to "Clock Timing".

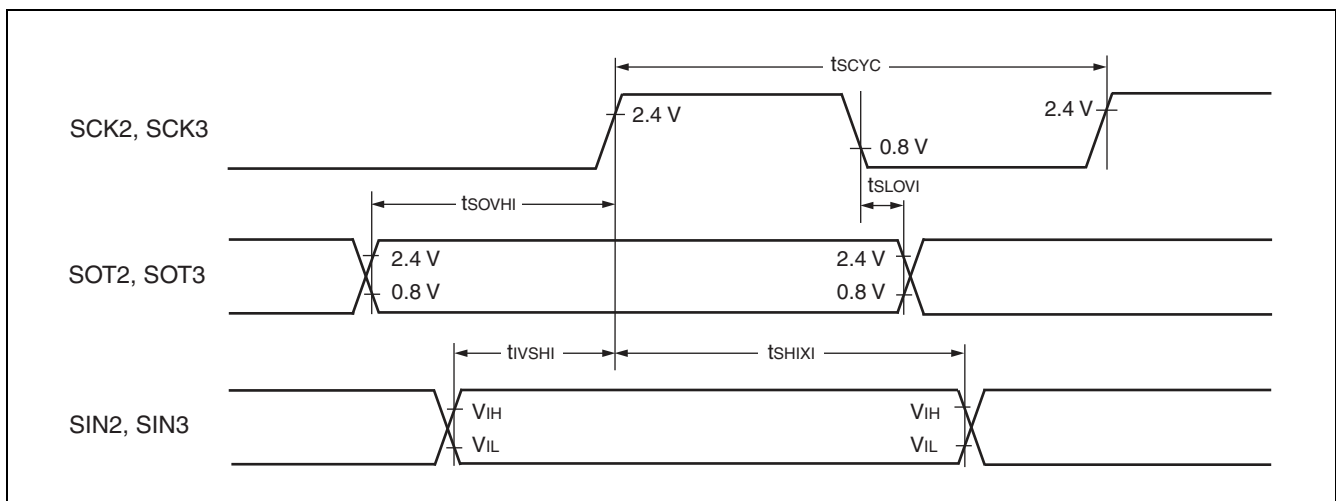




**13.4.10 Trigger Input Timing**
 $(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 


| Parameter         | Symbol                   | Pin                                     | Condition | Value      |     | Unit |
|-------------------|--------------------------|---|-----------|------------|-----|------|
|                   |                          |   |           | Min        | Max |      |
| Input pulse width | $t_{TRGH}$<br>$t_{TRGL}$ | INT8 to INT15,<br>INT9R to INT11R, ADTG | —         | $5 t_{CP}$ | —   | ns   |

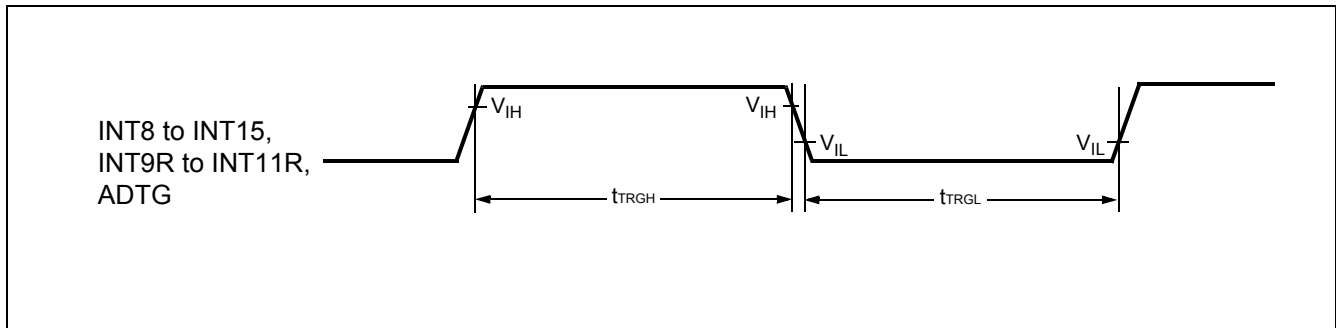
**13.4.11 Timer Related Resource Input Timing**
 $(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 

| Parameter         | Symbol                   | Pin                                 | Condition | Value      |     | Unit |
|-------------------|--------------------------|-------------------------------------|-----------|------------|-----|------|
|                   |                          |                                     |           | Min        | Max |      |
| Input pulse width | $t_{TIWH}$<br>$t_{TIWL}$ | TIN1, TIN3, IN0, IN1,<br>IN4 to IN7 | —         | $4 t_{CP}$ | —   | ns   |

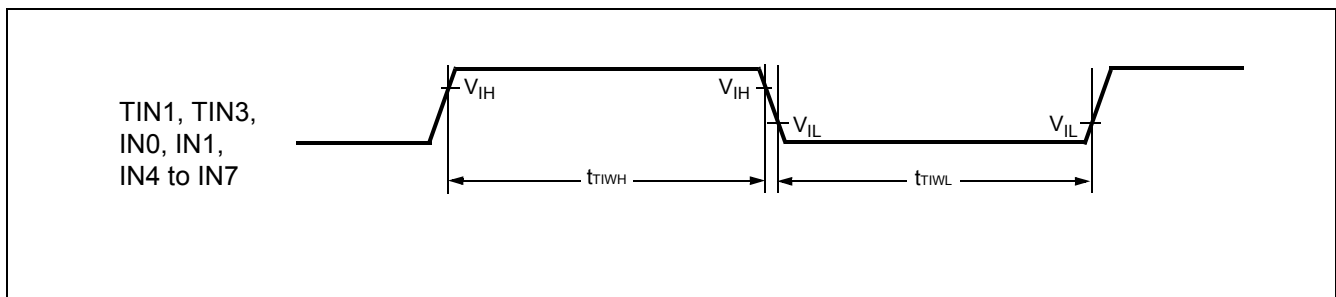
**13.4.12 Timer Related Resource Output Timing**
 $(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, V_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = AV_{SS} = 0\text{ V})$ 

| Parameter   | Symbol   | Pin                                     | Condition | Value |     | Unit |
|---|----------|---|-----------|-------|-----|------|
|   |          |   |           | Min   | Max |      |
| CLK $\uparrow$ $\rightarrow$ T <sub>OUT</sub> change time | $t_{TO}$ | TOT1, TOT3, PPG4, PPG6,<br>PPG8 to PPGF | —         | 30    | —   | ns   |

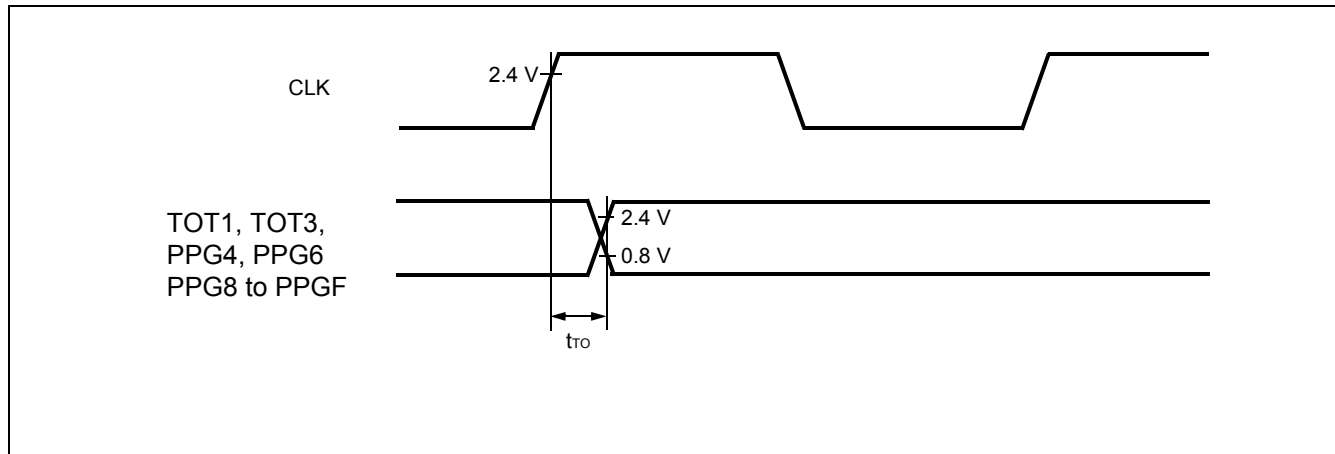

### 13.4.13 I<sup>2</sup>C Timing

( $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ ,  $V_{CC} = AV_{CC} = 5.0\text{ V} \pm 10\%$ ,  $f_{CP} \leq 24\text{ MHz}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ )

| Parameter   | Symbol      | Condition                           | Standard-mode |        | Fast-mode*4 |       | Unit          |
|---|-------------|-------------------------------------|---------------|--------|-------------|-------|---------------|
|   |             |                                     | Min           | Max    | Min         | Max   |               |
| SCL clock frequency   | $f_{SCL}$   | R = 1.7 k $\Omega$ ,<br>C = 50 pF*1 | 0             | 100    | 0           | 400   | kHz           |
| Hold time for (repeated) START condition<br>SDA $\downarrow \rightarrow$ SCL $\downarrow$ | $t_{HDSTA}$ |                                     | 4.0           | —      | 0.6         | —     | $\mu\text{s}$ |
| "L" width of the SCL clock  | $t_{LOW}$   |                                     | 4.7           | —      | 1.3         | —     | $\mu\text{s}$ |
| "H" width of the SCL clock  | $t_{HIGH}$  |                                     | 4.0           | —      | 0.6         | —     | $\mu\text{s}$ |
| Set-up time for a repeated START condition<br>SCL $\uparrow \rightarrow$ SDA $\downarrow$ | $t_{SUSTA}$ |                                     | 4.7           | —      | 0.6         | —     | $\mu\text{s}$ |
| Data hold time<br>SCL $\downarrow \rightarrow$ SDA $\downarrow \uparrow$                  | $t_{HDDAT}$ |                                     | 0             | 3.45*2 | 0           | 0.9*3 | $\mu\text{s}$ |
| Data set-up time<br>SDA $\downarrow \uparrow \rightarrow$ SCL $\uparrow$                  | $t_{SUDAT}$ |                                     | 250*5         | —      | 100*5       | —     | ns            |
| Set-up time for STOP condition<br>SCL $\uparrow \rightarrow$ SDA $\uparrow$               | $t_{SUSTO}$ |                                     | 4.0           | —      | 0.6         | —     | $\mu\text{s}$ |
| Bus free time between STOP condition and START condition                                  | $t_{BUS}$   |                                     | 4.7           | —      | 1.3         | —     | $\mu\text{s}$ |

\*1: R, C : Pull-up resistor and load capacitor of the SCL and SDA lines.


\*2: The maximum  $t_{HDDAT}$  has to meet at least that the device does not exceed the "L" width ( $t_{LOW}$ ) of the SCL signal.

\*3: A Fast-mode I<sup>2</sup>C -bus device can be used in a Standard-mode I<sup>2</sup>C-bus system, but the requirement  $t_{SUDAT} \geq 250\text{ ns}$  must be met.

\*4: For use at over 100 kHz, set the machine clock to at least 6 MHz.


\*5: Refer to "• Note of SDA, SCL set-up time".

• Note of SDA, SCL set-up time

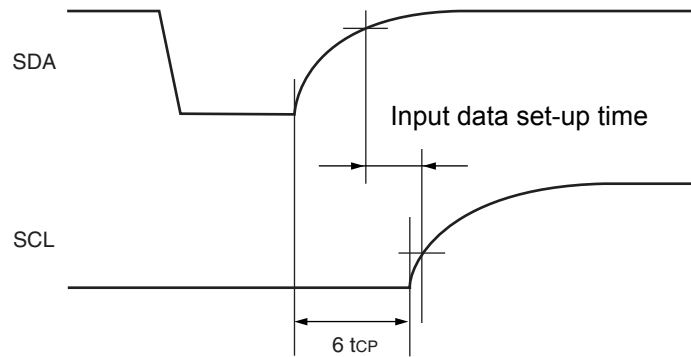

Note : The rating of the input data set-up time in the device connected to the bus cannot be satisfied depending on the load capacitance or pull-up resistor.  
Be sure to adjust the pull-up resistor of SDA and SCL if the rating of the input data set-up time cannot be satisfied.

• Timing definition

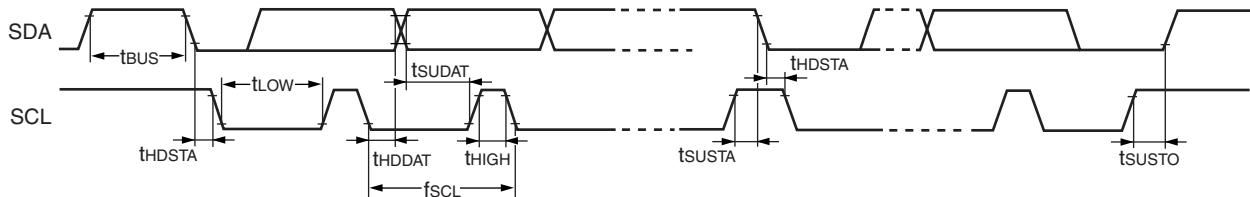

**13.5 A/D Converter**
 $(T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}, 3.0\text{ V} \leq \text{AVRH}, V_{CC} = \text{AV}_{CC} = 5.0\text{ V} \pm 10\%, f_{CP} \leq 24\text{ MHz}, V_{SS} = \text{AV}_{SS} = 0\text{ V})$ 

| Parameter                        | Symbol    | Pin              | Value                                    |  |  | Unit          | Remarks  |
|----------------------------------|-----------|------------------|--|--|--|---------------|--|
|                                  |           |                  | Min                                      | Typ                                      | Max                                      |               |  |
| Resolution                       | —         | —                | —  | —  | 10                                       | bit           |  |
| Total error                      | —         | —                | —  | —  | $\pm 3.0$                                | LSB           |  |
| Nonlinearity error               | —         | —                | —  | —  | $\pm 2.5$                                | LSB           |  |
| Differential nonlinearity error  | —         | —                | —  | —  | $\pm 1.9$                                | LSB           |  |
| Zero reading voltage             | $V_{OT}$  | AN0 to AN14      | $\text{AV}_{SS} - 1.5 \times \text{LSB}$ | $\text{AV}_{SS} + 0.5 \times \text{LSB}$ | $\text{AV}_{SS} + 2.5 \times \text{LSB}$ | V             |  |
| Full scale reading voltage       | $V_{FST}$ | AN0 to AN14      | $\text{AVRH} - 3.5 \times \text{LSB}$    | $\text{AVRH} - 1.5 \times \text{LSB}$    | $\text{AVRH} + 0.5 \times \text{LSB}$    | V             |  |
| Compare time                     | —         | —                | 1.0                                      | —  | 16500                                    | $\mu\text{s}$ | $4.5\text{ V} \leq \text{AV}_{CC} \leq 5.5\text{ V}$ |
|                                  |           |                  | 2.0                                      |  |  |               | $4.0\text{ V} \leq \text{AV}_{CC} < 4.5\text{ V}$    |
| Sampling time                    | —         | —                | 0.5                                      | —  | ×  | $\mu\text{s}$ | $4.5\text{ V} \leq \text{AV}_{CC} \leq 5.5\text{ V}$ |
|                                  |           |                  | 1.2                                      |  |  |               | $4.0\text{ V} \leq \text{AV}_{CC} < 4.5\text{ V}$    |
| Analog port input current        | $I_{AIN}$ | AN0 to AN14      | -0.3                                     | —  | +0.3                                     | $\mu\text{A}$ |  |
| Analog input voltage range       | $V_{AIN}$ | AN0 to AN14      | $\text{AV}_{SS}$                         | —  | AVRH                                     | V             |  |
| Reference voltage range          | —         | AVRH             | $\text{AV}_{SS} + 2.7$                   | —  | $\text{AV}_{CC}$                         | V             |  |
| Power supply current             | $I_A$     | $\text{AV}_{CC}$ | —  | 3.5                                      | 7.5                                      | mA            |  |
|                                  | $I_{AH}$  | $\text{AV}_{CC}$ | —  | —  | 5  | $\mu\text{A}$ | *  |
| Reference voltage supply current | $I_R$     | AVRH             | —  | 600                                      | 900                                      | $\mu\text{A}$ |  |
|                                  | $I_{RH}$  | AVRH             | —  | —  | 5  | $\mu\text{A}$ | *  |
| Offset between channels          | —         | AN0 to AN14      | —  | —  | 4  | LSB           |  |


\* : If A/D converter is not operating, a current when CPU is stopped is applicable ( $V_{CC} = \text{AV}_{CC} = \text{AVRH} = 5.0\text{ V}$ ).

**Notes on A/D Converter Section**
**■ About the external impedance of the analog input and its sampling time**

A/D converter with sample and hold circuit. If the external impedance is too high to keep sufficient sampling time, the analog voltage charged to the internal sample and hold capacitor is insufficient, adversely affecting

A/D conversion precision. Therefore to satisfy the A/D conversion precision standard, consider the relationship between the external impedance and minimum sampling time and either adjust the register value and operating frequency or decrease the external impedance so that the sampling time is longer than the minimum value. Also if the sampling time cannot be sufficient, connect a capacitor of about 0.1  $\mu\text{F}$  to the analog input pin.

· Analog input equivalence circuit

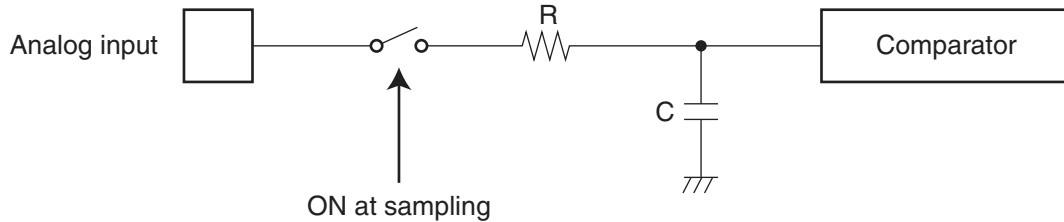

MB90F351E(S),MB90F351TE(S),MB90F352E(S),MB90F352TE(S),  
MB90F356E(S),MB90F356TE(S),MB90F357E(S),MB90F357TE(S)

|   | R                    | C             |
|---|----------------------|---------------|
| $4.5\text{ V} \leq AV_{CC} \leq 5.5\text{ V}$ | 2.0 k $\Omega$ (Max) | 16.0 pF (Max) |
| $4.0\text{ V} \leq AV_{CC} \leq 4.5\text{ V}$ | 8.2 k $\Omega$ (Max) | 16.0 pF (Max) |

MB90351E(S),MB90351TE(S),MB90352E(S),MB90352TE(S),  
MB90356E(S),MB90356TE(S),MB90357E(S),MB90357TE(S),  
MB90V340E-101/102/103/104



|   | R                    | C             |
|---|----------------------|---------------|
| $4.5\text{ V} \leq AV_{CC} \leq 5.5\text{ V}$ | 2.0 k $\Omega$ (Max) | 14.4 pF (Max) |
| $4.0\text{ V} \leq AV_{CC} \leq 4.5\text{ V}$ | 8.2 k $\Omega$ (Max) | 14.4 pF (Max) |

Note : The value is reference value.

■ Flash memory device

· Relation between External impedance and minimum sampling time



(MB90F351E(S),MB90F351TE(S),MB90F352E(S),MB90F352TE(S),  
MB90F356E(S),MB90F356TE(S),MB90F357E(S),MB90F357TE(S))

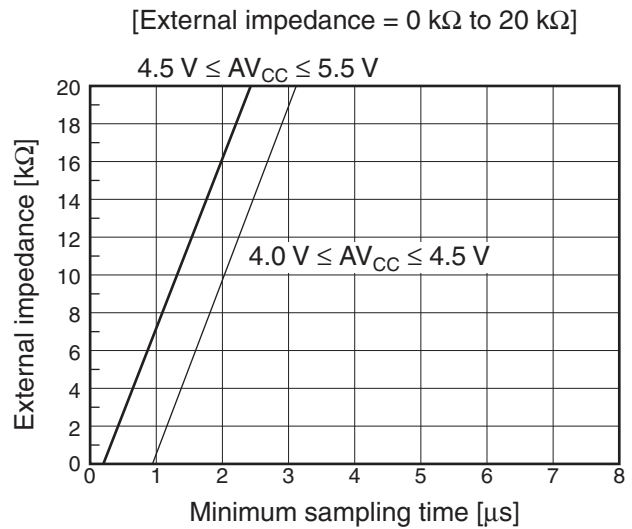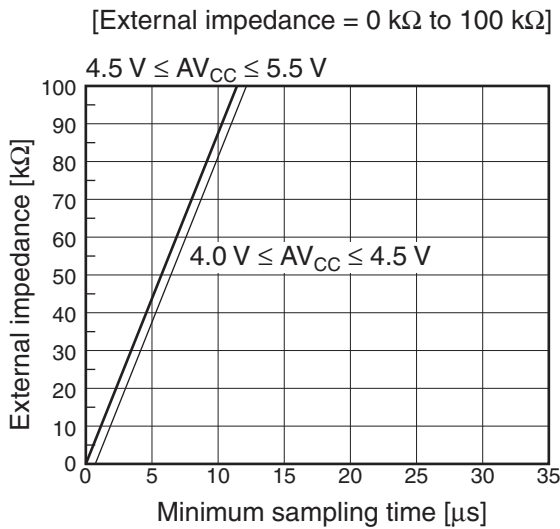

■ MASK ROM device

· Relation between External impedance and minimum sampling time

( MB90351E(S),MB90351TE(S),MB90352E(S),MB90352TE(S),MB90356E(S),  
MB90356TE(S),MB90357E(S),MB90357TE(S),MB90V340E-101/102/103/104)

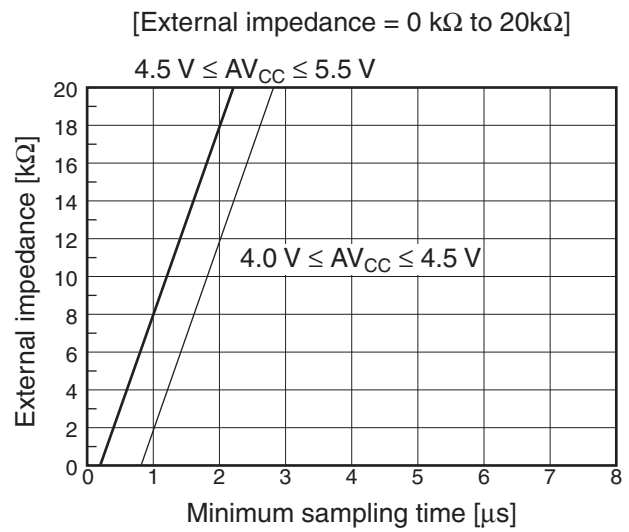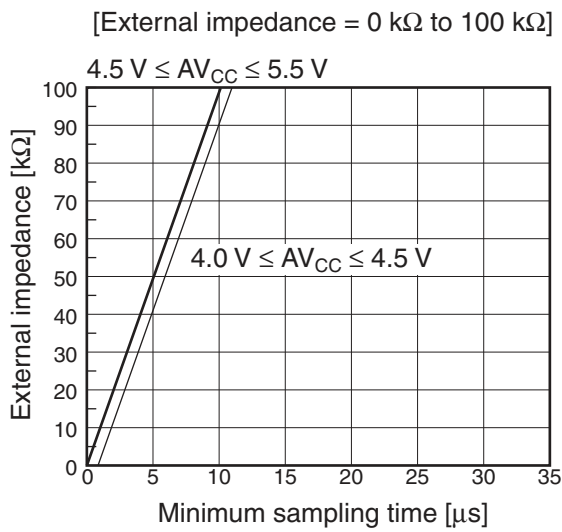


■ About the error

Values of relative errors grow larger, as |AV<sub>RH</sub> – AV<sub>SS</sub>| becomes smaller.

**13.6 Definition of A/D Converter Terms**

- Resolution : Analog variation that is recognized by an A/D converter.
- Non linearity error : Deviation between a line across zero-transition line ( “00 0000 0000” ← → “00 0000 0001” ) and full-scale transition line ( “11 1111 1110” ← → “11 1111 1111” ) and actual conversion characteristics.
- Differential linearity error : Deviation of input voltage, which is required for changing output code by 1 LSB, from an ideal value.
- Total error : Difference between an actual value and a theoretical value. A total error includes zero transition error, full-scale transition error, and linear error.

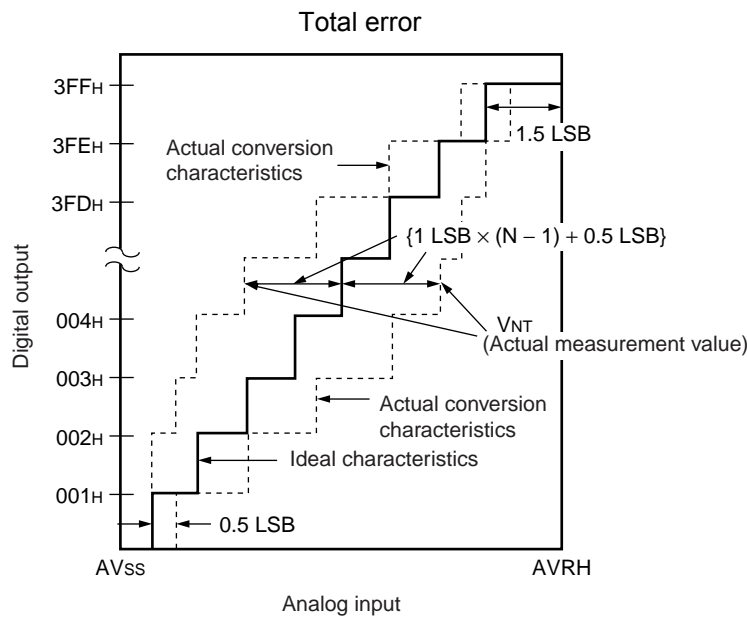

$$\text{Total error of digital output "N"} = \frac{V_{NT} - \{1 \text{ LSB} \times (N - 1) + 0.5 \text{ LSB}\}}{1 \text{ LSB}} \text{ [LSB]}$$

$$1 \text{ LSB (Ideal value)} = \frac{AVRH - AVSS}{1024} \text{ [V]}$$

N : A/D converter digital output value


V<sub>OT</sub> (Ideal value) = AV<sub>SS</sub> + 0.5 LSB [V]

V<sub>FST</sub> (Ideal value) = AVRH - 1.5 LSB [V]

V<sub>NT</sub> : A voltage at which digital output transits from (N - 1)<sub>H</sub> to N<sub>H</sub>.

(Continued)

(Continued)

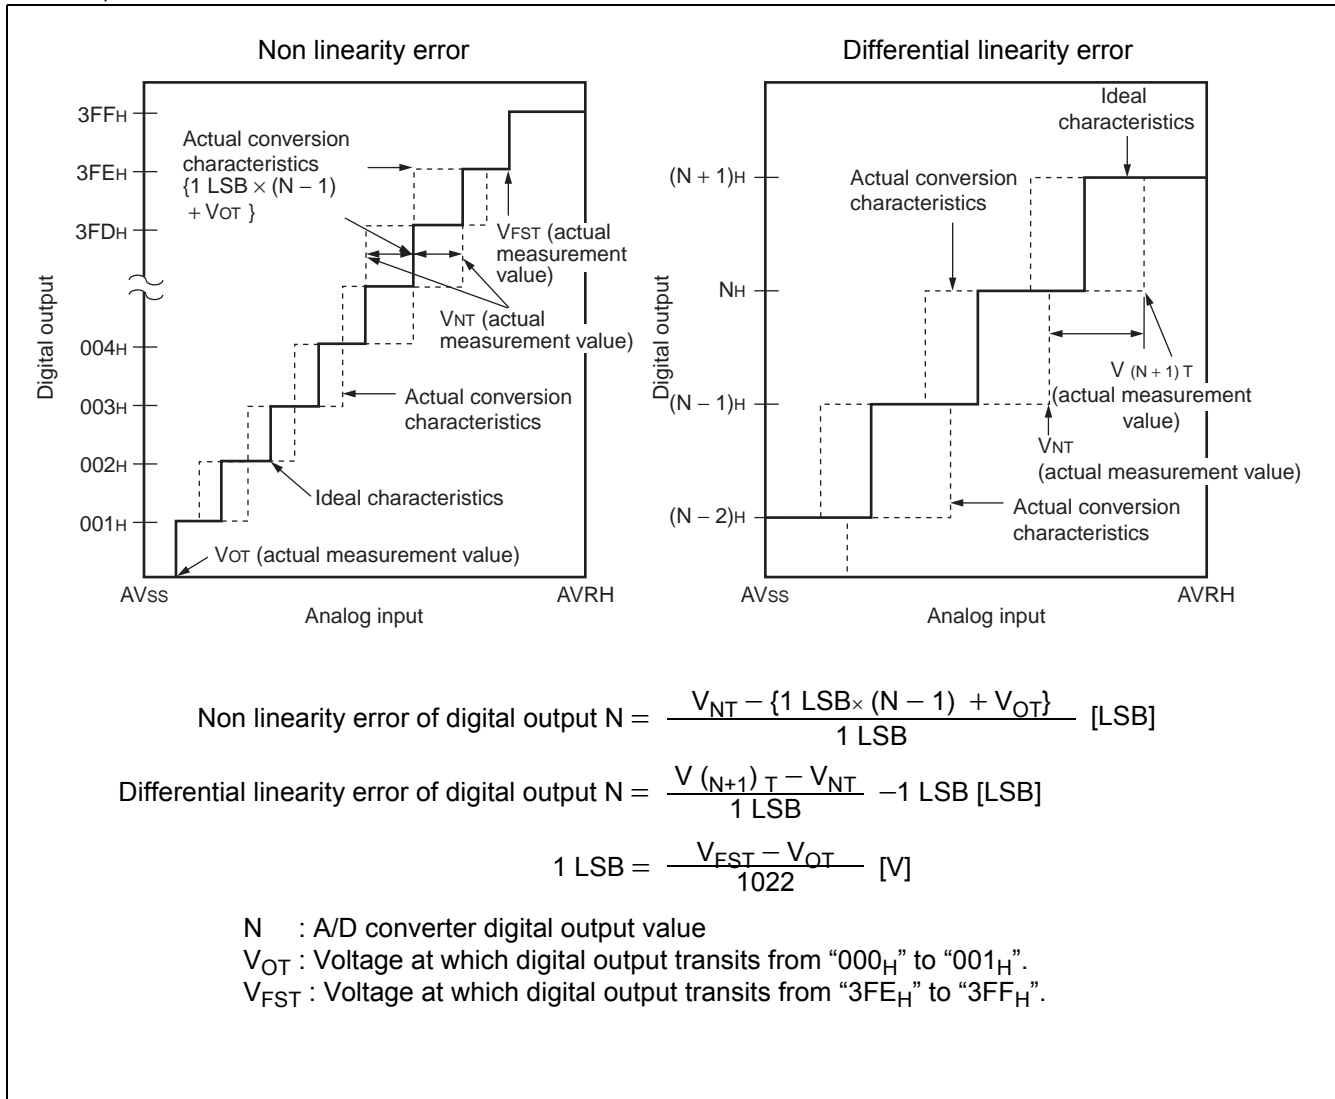

### 13.7 Flash Memory Program/Erase Characteristics

#### ■ Dual Operation Flash Memory

| Parameter                               | Conditions  | Value |     |      | Unit          | Remarks  |
|---|---|-------|-----|------|---------------|--|
|   |   | Min   | Typ | Max  |               |  |
| Sector erase time<br>(4 Kbytes sector)  | $T_A = +25^\circ\text{C}$<br>$V_{CC} = 5.0 \text{ V}$ | —     | 0.2 | 0.5  | s             | Excludes programming prior to erasure            |
| Sector erase time<br>(16 Kbytes sector) |   | —     | 0.5 | 7.5  | s             | Excludes programming prior to erasure            |
| Chip erase time                         |   | —     | 4.6 | —    | s             | Excludes programming prior to erasure            |
| Word (16-bit width)<br>programming time |   | —     | 64  | 3600 | $\mu\text{s}$ | Except for the overhead time of the system level |
| Program/Erase cycle                     | —   | 10000 | —   | —    | cycle         |  |



| Parameter                        | Conditions                           | Value |     |     | Unit | Remarks |
|----------------------------------|--------------------------------------|-------|-----|-----|------|---------|
|                                  |                                      | Min   | Typ | Max |      |         |
| Flash memory Data Retention Time | Average<br>$T_A = +85^\circ\text{C}$ | 20    | —   | —   | year | *       |

\* : Corresponding value comes from the technology reliability evaluation result.  
(Using Arrhenius equation to translate high temperature measurements test result into normalized value at +85°C)

## 14. Ordering Information


| Part number    | Package  | Remarks   |
|----------------|--|---|
| MB90F351EPMC   | 64-pin plastic LQFP<br>FPT-64P-M23<br>12.0 mm □, 0.65 mm pitch | Flash memory products<br>(64 Kbytes)                    |
| MB90F351ESPMC  |  |   |
| MB90F351TEPMC  |  |   |
| MB90F351TESPMC |  |   |
| MB90F356EPMC   |  |   |
| MB90F356ESPMC  |  |   |
| MB90F356TEPMC  |  |   |
| MB90F356TESPMC |  |   |
| MB90F352EPMC   | 64-pin plastic LQFP<br>FPT-64P-M23<br>12.0 mm □, 0.65 mm pitch | Dual operation<br>Flash memory products<br>(128 Kbytes) |
| MB90F352ESPMC  |  |   |
| MB90F352TEPMC  |  |   |
| MB90F352TESPMC |  |   |
| MB90F357EPMC   |  |   |
| MB90F357ESPMC  |  |   |
| MB90F357TEPMC  |  |   |
| MB90F357TESPMC |  |   |
| MB90351EPMC    | 64-pin plastic LQFP<br>FPT-64P-M23<br>12.0 mm □, 0.65 mm pitch | MASK ROM products<br>(64 Kbytes)                        |
| MB90351ESPMC   |  |   |
| MB90351TEPMC   |  |   |
| MB90351TESPMC  |  |   |
| MB90356EPMC    |  |   |
| MB90356ESPMC   |  |   |
| MB90356TEPMC   |  |   |
| MB90356TESPMC  |  |   |
| MB90352EPMC    | 64-pin plastic LQFP<br>FPT-64P-M23<br>12.0 mm □, 0.65 mm pitch | MASK ROM products<br>(128 Kbytes)                       |
| MB90352ESPMC   |  |   |
| MB90352TEPMC   |  |   |
| MB90352TESPMC  |  |   |
| MB90357EPMC    |  |   |
| MB90357ESPMC   |  |   |
| MB90357TEPMC   |  |   |
| MB90357TESPMC  |  |   |

(Continued)

*(Continued)*


| Part number     | Package  | Remarks   |
|-----------------|--|---|
| MB90F351EPMC1   | 64-pin plastic LQFP<br>FPT-64P-M24<br>10.0 mm □, 0.50 mm pitch | Flash memory products<br>(64 Kbytes)                    |
| MB90F351ESPMC1  |  |   |
| MB90F351TEPMC1  |  |   |
| MB90F351TESPMC1 |  |   |
| MB90F356EPMC1   |  |   |
| MB90F356ESPMC1  |  |   |
| MB90F356TEPMC1  |  |   |
| MB90F356TESPMC1 |  |   |
| MB90F352EPMC1   | 64-pin plastic LQFP<br>FPT-64P-M24<br>10.0 mm □, 0.50 mm pitch | Dual operation<br>Flash memory products<br>(128 Kbytes) |
| MB90F352ESPMC1  |  |   |
| MB90F352TEPMC1  |  |   |
| MB90F352TESPMC1 |  |   |
| MB90F357EPMC1   |  |   |
| MB90F357ESPMC1  |  |   |
| MB90F357TEPMC1  |  |   |
| MB90F357TESPMC1 |  |   |
| MB90351EPMC1    | 64-pin plastic LQFP<br>FPT-64P-M24<br>10.0 mm □, 0.50 mm pitch | MASK ROM products<br>(64 Kbytes)                        |
| MB90351ESPMC1   |  |   |
| MB90351TEPMC1   |  |   |
| MB90351TESPMC1  |  |   |
| MB90356EPMC1    |  |   |
| MB90356ESPMC1   |  |   |
| MB90356TEPMC1   |  |   |
| MB90356TESPMC1  |  |   |
| MB90352EPMC1    | 64-pin plastic LQFP<br>FPT-64P-M24<br>10.0 mm □, 0.50 mm pitch | MASK ROM products<br>(128 Kbytes)                       |
| MB90352ESPMC1   |  |   |
| MB90352TEPMC1   |  |   |
| MB90352TESPMC1  |  |   |
| MB90357EPMC1    |  |   |
| MB90357ESPMC1   |  |   |
| MB90357TEPMC1   |  |   |
| MB90357TESPMC1  |  |   |
| MB90V340E-101CR | 299-pin ceramic PGA<br>PGA-299C-A01                            | Device for evaluation                                   |
| MB90V340E-102CR |  |   |
| MB90V340E-103CR |  |   |
| MB90V340E-104CR |  |   |

**14.1 Package Dimensions**
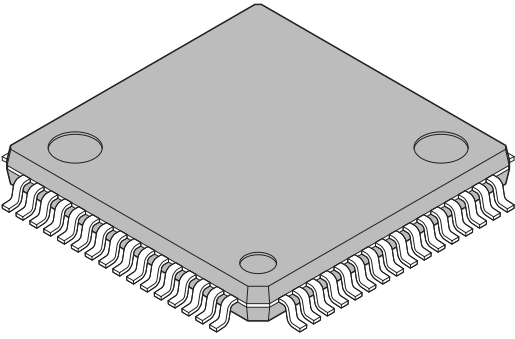
|   |                                |                      |
|---|--------------------------------|----------------------|
| <p>64-pin plastic LQFP</p>  <p>(FPT-64P-M23)</p> | Lead pitch                     | 0.65 mm              |
|   | Package width × package length | 12.0 × 12.0 mm       |
|   | Lead shape                     | Gullwing             |
|   | Sealing method                 | Plastic mold         |
|   | Mounting height                | 1.70 mm MAX          |
|   | Code (Reference)               | P-LFQFP64-12×12-0.65 |
|   |                                |                      |

64-pin plastic LQFP (FPT-64P-M23)

Note 1) \* : These dimensions do not include resin protrusion.  
 Note 2) Pins width and pins thickness include plating thickness.  
 Note 3) Pins width do not include tie bar cutting remainder.

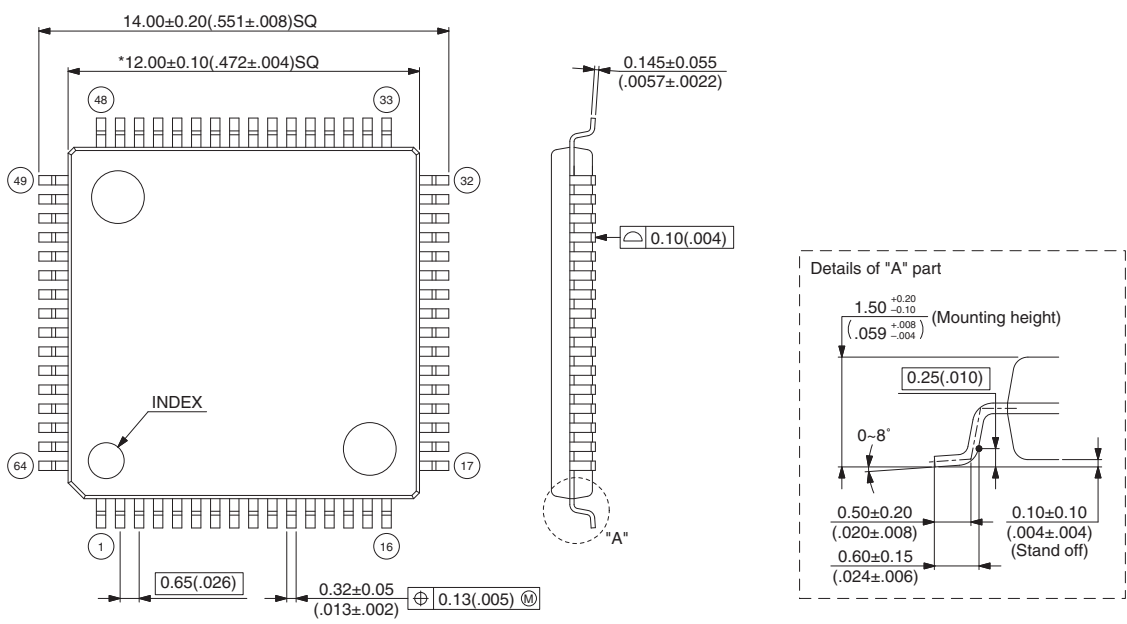

Top view dimensions:  
 Overall width:  $14.00 \pm 0.20$  ( $.551 \pm .008$ ) SQ  
 Pin pitch:  $0.65$  ( $.026$ )  
 Pin width:  $0.32 \pm 0.05$  ( $.013 \pm .002$ )  
 Pin thickness:  $0.13$  ( $.005$ )

Side view dimensions:  
 Lead height:  $0.145 \pm 0.055$  ( $.0057 \pm .0022$ )  
 Lead thickness:  $0.10$  ( $.004$ )


Details of "A" part:  
 Mounting height:  $1.50$  ( $.059$ )  
 Lead thickness:  $0.25$  ( $.010$ )  
 Lead angle: 0-8°  
 Stand off:  $0.10 \pm 0.10$  ( $.004 \pm .004$ )  
 Lead width:  $0.50 \pm 0.20$  ( $.020 \pm .008$ )  
 Lead thickness:  $0.60 \pm 0.15$  ( $.024 \pm .006$ )


©2003-2008 FUJITSU MICROELECTRONICS LIMITED F64034S-C-1-2

Dimensions in mm (inches).  
 Note: The values in parentheses are reference values

(Continued)

(Continued)
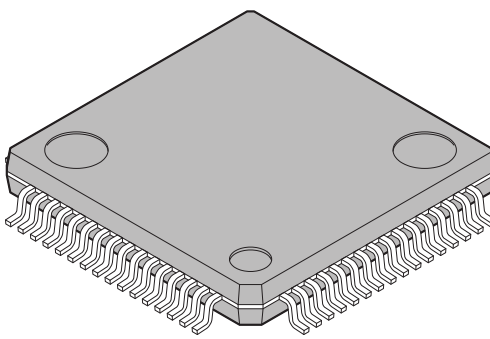
|   |                                |                      |
|---|--------------------------------|----------------------|
| <p>64-pin plastic LQFP</p>  <p>(FPT-64P-M24)</p> | Lead pitch                     | 0.50 mm              |
|   | Package width × package length | 10.0 × 10.0 mm       |
|   | Lead shape                     | Gullwing             |
|   | Sealing method                 | Plastic mold         |
|   | Mounting height                | 1.70 mm MAX          |
|   | Weight                         | 0.32 g               |
|   | Code (Reference)               | P-LFQFP64-10×10-0.50 |

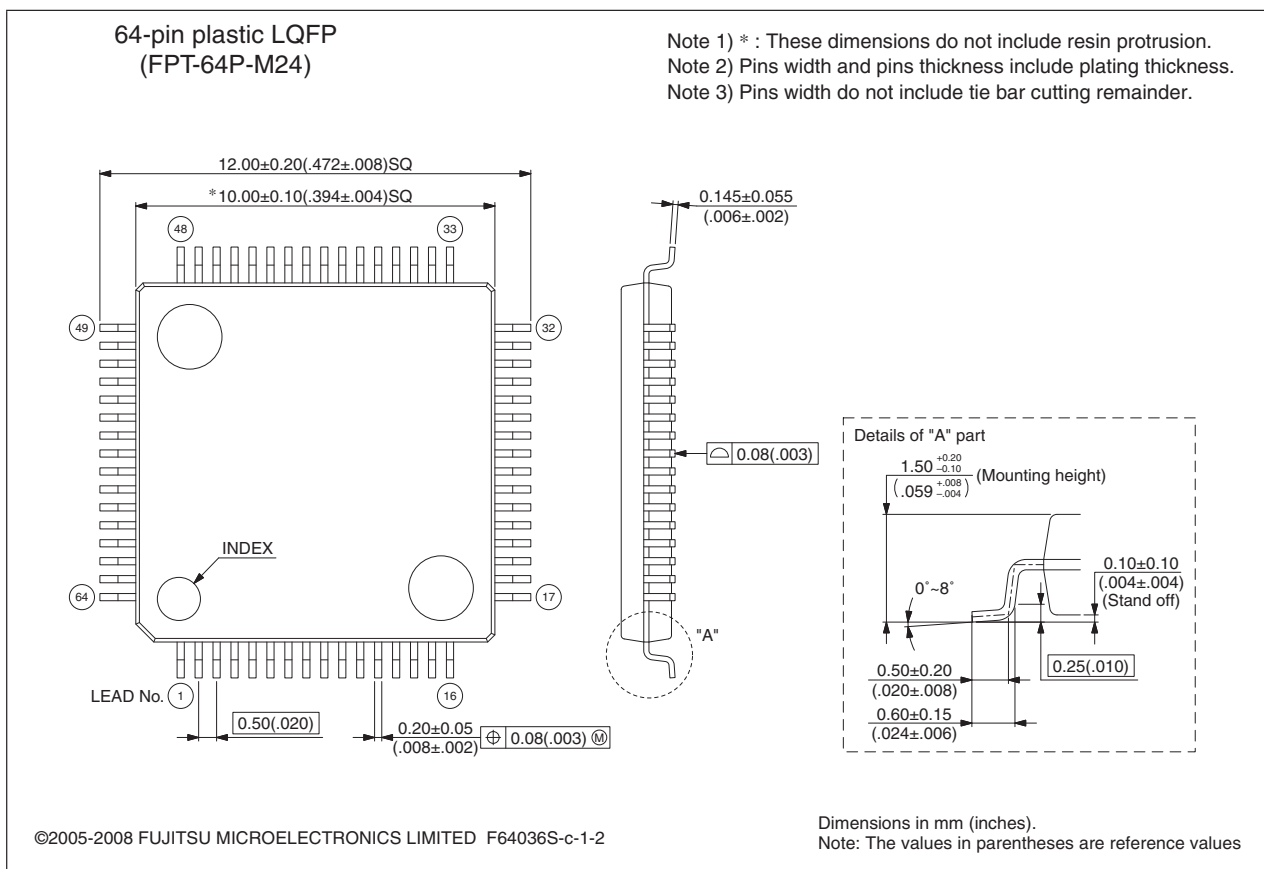

## 15. Major Changes

| Page     | Section  | Change Results   |
|----------|--|--|
| —        | —  | The following names are changed.<br>UART → LIN-UART<br>16-bit I/O timer → 16-bit free-run timer  |
| 26       | Handling Devices                                       | Added the section "13. Serial Communication".  |
| 51       | Electrical Characteristics<br>Absolute Maximum Ratings | Changed the maximum value of power consumption.  |
| 63       | Electrical Characteristics<br>AC Characteristics       | Changed the "(4) Clock Output Timing".<br>Changed the Minimum value of cycle time.<br>(41.76 → 41.67)  |
| 69 to 73 |  | Changed the notation of "(9) LIN-UART".  |
| 78       | A/D Converter  | Changed the notation of "Zero reading voltage" and "full scale reading voltage".   |
| 85       | Ordering Information                                   | Changed the part number;<br>MB90V340E-101 → MB90V340E-101CR<br>MB90V340E-102 → MB90V340E-102CR<br>MB90V340E-103 → MB90V340E-103CR<br>MB90V340E-104 → MB90V340E-104CR |

**NOTE:** Please see "Document History" about later revised information.

## Document History

| Document Title: MB90350E Series F <sup>2</sup> MC-16LX 16-bit Microcontrollers |         |                 |                 |  |
|--|---------|-----------------|-----------------|--|
| Document Number: 002-04493   |         |                 |                 |  |
| Revision   | ECN     | Orig. of Change | Submission Date | Description of Change  |
| **   | —       | AKIH            | 10/12/2006      | Migrated to Cypress and assigned document number 002-04993.<br>No change to document contents or format. |
| *A   | 5193077 | AKIH            | 04/07/2016      | Updated to Cypress template  |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

#### Products

|                               |  |
|-------------------------------|--|
| ARM® Cortex® Microcontrollers | <a href="http://cypress.com/arm">cypress.com/arm</a>               |
| Automotive                    | <a href="http://cypress.com/automotive">cypress.com/automotive</a> |
| Clocks & Buffers              | <a href="http://cypress.com/clocks">cypress.com/clocks</a>         |
| Interface                     | <a href="http://cypress.com/interface">cypress.com/interface</a>   |
| Lighting & Power Control      | <a href="http://cypress.com/powerpsoc">cypress.com/powerpsoc</a>   |
| Memory                        | <a href="http://cypress.com/memory">cypress.com/memory</a>         |
| PSoC                          | <a href="http://cypress.com/psoc">cypress.com/psoc</a>             |
| Touch Sensing                 | <a href="http://cypress.com/touch">cypress.com/touch</a>           |
| USB Controllers               | <a href="http://cypress.com/usb">cypress.com/usb</a>               |
| Wireless/RF                   | <a href="http://cypress.com/wireless">cypress.com/wireless</a>     |

#### PSoC® Solutions

[cypress.com/psoc](http://cypress.com/psoc)  
PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP

#### Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

#### Technical Support

[cypress.com/support](http://cypress.com/support)

© Cypress Semiconductor Corporation, 2006-2016. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.