## Type RS60SB Resettable Fuse (PTC's) Radial Leaded



www.optifuse.com

(619) 593-5050

**Application:** 

Wide variety of electronic equipment

**Product Features:** 

Low hold current, Solid State

Radial-leaded product ideal for up to 60V

**Operation Current:** 500mA~5.00A

**Maximum Voltage:** 60V

**Temperature Range:** -40°C to 85°C

**Agency Standards and Listings:** 

a**FL** us

For RS60SB-050 ~ RS60SB-065

RS60SB-090 ~ RS60SB-375

And CAL

for RS60SB-075

#### Electrical Characteristics (20°C)

Part Number	Hold	Trip	Max. Time To Trip		Maximum Current	Rated Voltage	Typical Power	Resistance Tolerance	
	Current	Current						RMIN	R1max
	I <sub>H</sub> , A	I <sub>T</sub> , A	I, A	Time(sec)	$I_{MAX}$ , A	$V_{MAX}, V$	Pd, W	Ω	Ω
RS60SB-050	0.50	1.00	8.00	0.8	40	60	1.00	0.320	0.900
RS60SB-065	0.65	1.30	8.00	1.0	40	60	1.25	0.250	0.720
RS60SB-075	0.75	1.50	8.00	1.5	40	60	1.40	0.200	0.640
RS60SB-090	0.90	1.80	8.00	2.0	40	60	1.50	0.190	0.520
RS60SB-110	1.10	2.20	8.00	3.0	40	60	2.20	0.170	0.470
RS60SB-135	1.35	2.70	8.00	4.5	40	60	2.30	0.110	0.370
RS60SB-160	1.60	3.20	8.20	9.0	40	60	2.40	0.100	0.320
RS60SB-185	1.85	3.70	9.25	12.6	40	60	2.60	0.060	0.250
RS60SB-250	2.50	5.00	12.50	15.6	40	60	2.80	0.040	0.140
RS60SB-300	3.00	6.00	15.00	19.8	40	60	3.20	0.030	0.080
RS60SB-375	3.75	7.50	18.75	22.0	40	60	3.40	0.017	0.060
RS60SB-400	4.00	8.00	20.00	24.0	40	60	3.70	0.014	0.060
RS60SB-500	5.00	10.00	25.00	28.0	40	60	5.00	0.012	0.050

I<sub>H</sub> = Hold Current – Maximum current at which the device will not trip at 20°C still air.

I<sub>T</sub> = Trip Current – Minimum current at which the device will always trip at 20°C still air.

 $V_{MAX}$  = Maximum voltage device can withstand without damage at it's rated current.

I<sub>MAX</sub> = Maximum fault current device can withstand without damage at rated voltage (V max).

Pd = Typical power dissipated from device when in the tripped state in 20°C still air environment.

**R**<sub>MIN</sub> = Minimum device resistance at 20°C.

R1<sub>MAX</sub> = Maximum device resistance at 20°C, 1 hour after tripping.

**Physical Specifications:** 

**Lead Material:** Tin plated copper, 24 AWG, 20 AWG. **Soldering Characteristics:** MIL-STD-202, Method 208E.

**Insulating Coating:** Flame retardant epoxy, meet UL-94V-0 requirement.

Note: All specifications subject to change without notice.

Rev B 02/2018 - Page: 1/3

Code:F01-01H

# Type RS60SB Resettable Fuse (PTC's) Radial Leaded




www.optifuse.com

(800) 621-0326


### **RS60SB Product Dimensions (millimeters)**

Figure 1

RS60SB-050 ~ RS60SB-090 Lead Size: 24AWG, 0.51 mm Diameter




RS60SB-110 Lead Size: 20AWG, 0.81 mm Diameter



RS60SB-135 ~ RS60SB-500 Lead Size: 20AWG, 0.81 mm Diameter

Daniel Managhan	E	A	В	C	D	E	F
Part Number Figure		Maximum	Maximum	Typical	Minimum	Maximum	Typical
RS60SB-050	1	7.10	11.43	5.1	7.6	3.56	1.1
RS60SB-065	1	7.11	12.20	5.1	7.6	3.56	1.1
RS60SB-075	1	7.87	12.20	5.1	7.6	3.56	1.1
RS60SB-090	1	7.87	13.97	5.1	7.6	3.56	1.1
RS60SB-110	2	7.60	14.50	5.1	7.6	4.10	1.1
RS60SB-135	3	10.20	17.00	5.1	7.6	3.81	1.4
RS60SB-160	3	12.20	18.30	5.1	7.6	3.81	1.4
RS60SB-185	3	13.00	18.80	5.1	7.6	3.81	1.4
RS60SB-250	3	14.00	20.60	5.1	7.6	3.00	1.4
RS60SB-300	3	16.50	21.20	5.1	7.6	3.00	1.4
RS60SB-375	3	16.50	25.20	10.2	7.6	3.00	1.4
RS60SB-400	3	21.00	24.90	10.2	7.6	3.00	1.4
RS60SB-500	3	24.10	29.00	10.2	7.6	3.00	1.4

### Thermal Derating Curve - Type RS60SB

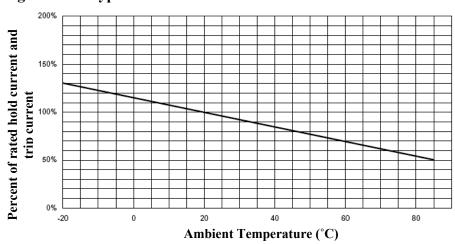

Note: All specifications subject to change without notice.

Rev B 02/2018 - Page: 2/3 Code:F01-01H


### Type RS60SB Resettable Fuse (PTC's) Radial Leaded



www.optifuse.com

(800) 621-0326

#### Typical Time-To-Trip at 20°C

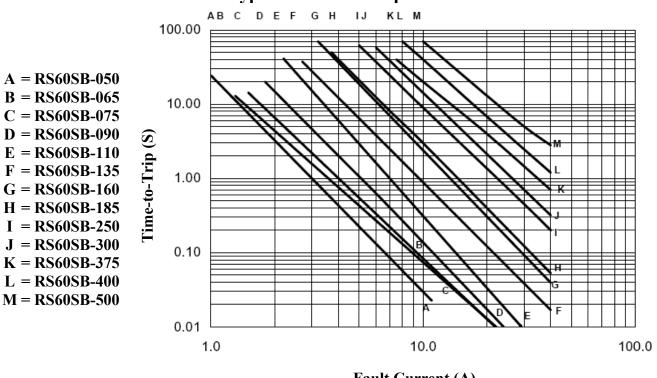

Fault Current (A)

Part Number	Pcs/Bag	Reel/Tape
RS60SB-050	500	3K
RS60SB-065	300	3K
RS60SB-075	300	3K
RS60SB-090	300	1.5K
RS60SB-110	300	1.5K
RS60SB-135	200	1.5K
RS60SB-160	200	1.5K

Part Number	Pcs/Bag	Reel/Tape
RS60SB-185	200	1.5K
RS60SB-250	100	1K
RS60SB-300	100	1K
RS60SB-375	100	1K
RS60SB-400	100	1K
RS60SB-500	100	1K

#### Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

-Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.