


GRN-110 MULTI MECHANICAL SPECIFICATIONS

APPLICATIONS INFORMATION

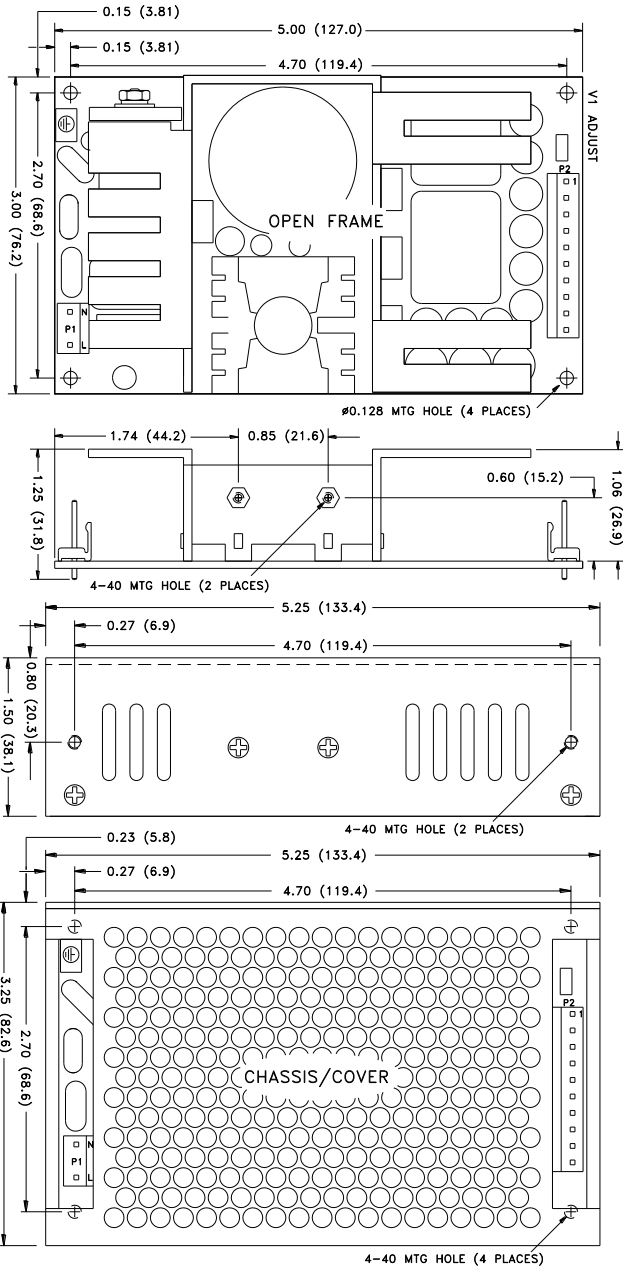

ALL DIMENSIONS IN INCHES (mm)


CONNECTOR SPECIFICATIONS

<p>P1</p> <ul style="list-style-type: none"> ■ NEUTRAL ■ LINE 	<p>AC Input</p>	<p>0.156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3-640706-1 or equivalent crimp terminal.</p>
<p>P2</p> <ul style="list-style-type: none"> ■ 1 (-) OUTPUT 4 ■ 2 (+) OUTPUT 4 ■ 3 (-) OUTPUT 3 ■ 4 (+) OUTPUT 3 ■ 5 (-) OUTPUT 2 ■ 6 (+) OUTPUT 2 ■ 7 (-) OUTPUT 1 ■ 8 (-) OUTPUT 1 ■ 9 (+) OUTPUT 1 ■ 10 (+) OUTPUT 1 	<p>DC Output</p>	<p>0.156 friction lock header mates with Tyco 1-770849-0 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal.</p>
<p>□ ⊕</p>	<p>Ground</p>	<p>0.187 quick disconnect terminal</p>


1. Each output can deliver its rated current but Total Output Power must not exceed 110W.
2. Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
3. Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
4. This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
5. Minimum load is not required for reliable operation; however, a 10% load may be required on Output 1 when loading Outputs 2, 3 or 4.
6. This product includes only one fuse in the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-1:2005, a second fuse may be required in neutral conductor of the end product.
7. Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz bandwidth.
8. This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1ST Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
9. This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
10. Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.188 inches.
11. To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/Cover option is recommended. Refer to Operating Instructions for additional information.
12. Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.
13. Optional Output Configuration (consult factory).
 - V2 can be configured positive, negative or floating with respect to V1.
 - V3 can be configured positive or floating with respect to V1.
 - V4 can be configured positive, negative or floating with respect to V1.

TYPICAL EFFICIENCY vs. LOAD

(Model GRN-110-3001 Efficiency shown)

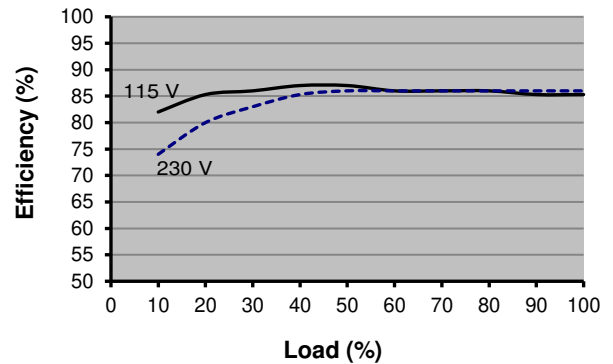

MAX P_{OUT} vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

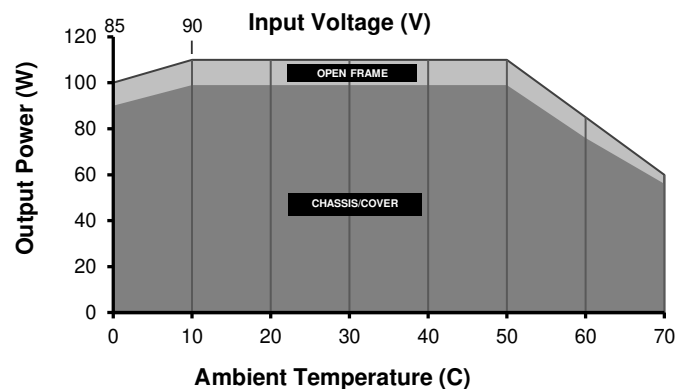

Derating requirements - Derate from 100% load at 50°C to 50% load at 70°C.
 - Derate from 100% load at 90V_{IN} to 90% load at 85V_{IN}.
 - Derate 10% with Chassis/Cover option.