



## N-channel 900 V, 0.21 $\Omega$ typ., 20 A MDmesh™ K5 Power MOSFET in a TO-247 package


**TO-247**


AM01479V1

### Features

| Order code | $V_{DS}$ | $R_{DS(on)}$ max. | $I_D$ |
|------------|----------|-------------------|-------|
| STW20N90K5 | 900 V    | 0.25 $\Omega$     | 20 A  |

- Industry's lowest  $R_{DS(on)}$  x area
- Industry's best FoM (figure of merit)
- Ultra-low gate charge
- 100% avalanche tested
- Zener-protected

### Applications

- Switching applications

### Description

This very high voltage N-channel Power MOSFET is designed using MDmesh™ K5 technology based on an innovative proprietary vertical structure. The result is a dramatic reduction in on-resistance and ultra-low gate charge for applications requiring superior power density and high efficiency.

#### Product status link

[STW20N90K5](#)

#### Product summary

|                   |            |
|-------------------|------------|
| <b>Order code</b> | STW20N90K5 |
| <b>Marking</b>    | 20N90K5    |
| <b>Package</b>    | TO-247     |
| <b>Packing</b>    | Tube       |

# 1 Electrical ratings

**Table 1. Absolute maximum ratings**

| Symbol        | Parameter   | Value      | Unit             |
|---------------|---|------------|------------------|
| $V_{GS}$      | Gate-source voltage   | $\pm 30$   | V                |
| $I_D$         | Drain current (continuous) at $T_C = 25\text{ }^\circ\text{C}$  | 20         | A                |
| $I_D$         | Drain current (continuous) at $T_C = 100\text{ }^\circ\text{C}$ | 13         | A                |
| $I_D^{(1)}$   | Drain current (pulsed)  | 80         | A                |
| $P_{TOT}$     | Total dissipation at $T_C = 25\text{ }^\circ\text{C}$           | 250        | W                |
| $dv/dt^{(2)}$ | Peak diode recovery voltage slope                               | 4.5        | V/ns             |
| $dv/dt^{(3)}$ | MOSFET $dv/dt$ ruggedness                                       | 50         |                  |
| $T_j$         | Operating junction temperature range                            | -55 to 150 | $^\circ\text{C}$ |
| $T_{stg}$     | Storage temperature range                                       |            |                  |

1. Pulse width limited by safe operating area
2.  $I_{SD} \leq 20\text{ A}$ ,  $di/dt \leq 100\text{ A}/\mu\text{s}$ ;  $V_{DS\text{ peak}} \leq V_{(BR)DSS}$ ,  $V_{DD} = 450\text{ V}$
3.  $V_{DS} \leq 720\text{ V}$

**Table 2. Thermal data**

| Symbol         | Parameter                           | Value | Unit                      |
|----------------|-------------------------------------|-------|---------------------------|
| $R_{thj-case}$ | Thermal resistance junction-case    | 0.5   | $^\circ\text{C}/\text{W}$ |
| $R_{thj-amb}$  | Thermal resistance junction-ambient | 50    | $^\circ\text{C}/\text{W}$ |

**Table 3. Avalanche characteristics**

| Symbol   | Parameter  | Value | Unit |
|----------|--|-------|------|
| $I_{AR}$ | Avalanche current, repetitive or not repetitive (pulse width limited by $T_{jmax}$ )                                 | 6.5   | A    |
| $E_{AS}$ | Single pulse avalanche energy (starting $T_j = 25\text{ }^\circ\text{C}$ , $I_D = I_{AR}$ , $V_{DD} = 50\text{ V}$ ) | 500   | mJ   |

## 2 Electrical characteristics

$T_C = 25\text{ °C}$  unless otherwise specified

**Table 4. On/off-state**

| Symbol        | Parameter                         | Test conditions   | Min. | Typ. | Max.     | Unit          |
|---------------|-----------------------------------|---|------|------|----------|---------------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage    | $V_{GS} = 0\text{ V}$ , $I_D = 1\text{ mA}$   | 900  |      |          | V             |
| $I_{DSS}$     | Zero gate voltage drain current   | $V_{GS} = 0\text{ V}$ , $V_{DS} = 900\text{ V}$   |      |      | 1        | $\mu\text{A}$ |
|               |                                   | $V_{GS} = 0\text{ V}$ , $V_{DS} = 900\text{ V}$<br>$T_C = 125\text{ °C}$ <sup>(1)</sup> |      |      | 50       | $\mu\text{A}$ |
| $I_{GSS}$     | Gate body leakage current         | $V_{DS} = 0\text{ V}$ , $V_{GS} = \pm 20\text{ V}$                                      |      |      | $\pm 10$ | $\mu\text{A}$ |
| $V_{GS(th)}$  | Gate threshold voltage            | $V_{DS} = V_{GS}$ , $I_D = 100\text{ }\mu\text{A}$                                      | 3    | 4    | 5        | V             |
| $R_{DS(on)}$  | Static drain-source on-resistance | $V_{GS} = 10\text{ V}$ , $I_D = 10\text{ A}$  |      | 0.21 | 0.25     | $\Omega$      |

1. Defined by design, not subject to production test

**Table 5. Dynamic**

| Symbol                     | Parameter                             | Test conditions  | Min. | Typ. | Max. | Unit     |
|----------------------------|---------------------------------------|--|------|------|------|----------|
| $C_{iss}$                  | Input capacitance                     | $V_{DS} = 100\text{ V}$ , $f = 1\text{ MHz}$ ,<br>$V_{GS} = 0\text{ V}$                      | -    | 1500 | -    | pF       |
| $C_{oss}$                  | Output capacitance                    |  | -    | 120  | -    | pF       |
| $C_{riss}$                 | Reverse transfer capacitance          |  | -    | 1    | -    | pF       |
| $C_{o(er)}$ <sup>(1)</sup> | Equivalent capacitance energy related | $V_{GS} = 0\text{ V}$ , $V_{DS} = 0\text{ to }720\text{ V}$                                  | -    | 78   | -    | pF       |
| $C_{o(tr)}$ <sup>(2)</sup> | Equivalent capacitance time related   |  |      |      | 220  | -        |
| $R_g$                      | Intrinsic gate resistance             | $f = 1\text{ MHz}$ , $I_D = 0\text{ A}$  | -    | 3.7  | -    | $\Omega$ |
| $Q_g$                      | Total gate charge                     | $V_{DD} = 720\text{ V}$ , $I_D = 20\text{ A}$  | -    | 40   | -    | nC       |
| $Q_{gs}$                   | Gate-source charge                    | $V_{GS} = 0\text{ to }10\text{ V}$<br>(see Figure 14. Test circuit for gate charge behavior) | -    | 14   | -    | nC       |
| $Q_{gd}$                   | Gate-drain charge                     |  | -    | 17   | -    | nC       |

1.  $C_{o(er)}$  is a constant capacitance value that gives the same stored energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{DSS}$ .

2.  $C_{o(tr)}$  is a constant capacitance value that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{DSS}$ .

**Table 6. Switching times**

| Symbol       | Parameter           | Test conditions  | Min. | Typ. | Max. | Unit |
|--------------|---------------------|--|------|------|------|------|
| $t_{d(on)}$  | Turn-on delay time  | $V_{DD} = 450\text{ V}$ , $I_D = 10\text{ A}$ ,<br>$R_G = 4.7\text{ }\Omega$ , $V_{GS} = 10\text{ V}$<br>(see Figure 13. Test circuit for resistive load switching times and Figure 18. Switching time waveform) | -    | 20.2 | -    | ns   |
| $t_r$        | Rise time           |  | -    | 13.5 | -    | ns   |
| $t_{d(off)}$ | Turn-off delay time |  | -    | 64.7 | -    | ns   |
| $t_f$        | Fall time           |  | -    | 16   | -    | ns   |

**Table 7. Source-drain diode**

| Symbol          | Parameter                     | Test conditions   | Min. | Typ. | Max. | Unit          |
|-----------------|-------------------------------|---|------|------|------|---------------|
| $I_{SD}$        | Source-drain current          |   | -    |      | 20   | A             |
| $I_{SDM}^{(1)}$ | Source-drain current (pulsed) |   | -    |      | 80   | A             |
| $V_{SD}^{(2)}$  | Forward on voltage            | $I_{SD} = 20\text{ A}$ , $V_{GS} = 0\text{ V}$  | -    |      | 1.5  | V             |
| $t_{rr}$        | Reverse recovery time         | $I_{SD} = 20\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ ,<br>$V_{DD} = 60\text{ V}$<br>(see <a href="#">Figure 15. Test circuit for inductive load switching and diode recovery times</a> )                                     | -    | 517  |      | ns            |
| $Q_{rr}$        | Reverse recovery charge       |   | -    | 11.4 |      | $\mu\text{C}$ |
| $I_{RRM}$       | Reverse recovery current      |   | -    | 44   |      | A             |
| $t_{rr}$        | Reverse recovery time         | $I_{SD} = 20\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ ,<br>$V_{DD} = 60\text{ V}$ , $T_j = 150\text{ }^\circ\text{C}$<br>(see <a href="#">Figure 15. Test circuit for inductive load switching and diode recovery times</a> ) | -    | 674  |      | ns            |
| $Q_{rr}$        | Reverse recovery charge       |   | -    | 14   |      | $\mu\text{C}$ |
| $I_{RRM}$       | Reverse recovery current      |   | -    | 41.6 |      | A             |

1. Pulse width limited by safe operating area
2. Pulsed: pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5%

**Table 8. Gate-source Zener diode**

| Symbol        | Parameter                     | Test conditions                                 | Min | Typ | Max. | Unit |
|---------------|-------------------------------|---|-----|-----|------|------|
| $V_{(BR)GSO}$ | Gate-source breakdown voltage | $I_{GS} = \pm 1\text{ mA}$ , $I_D = 0\text{ A}$ | 30  | -   | -    | V    |

The built-in back-to-back Zener diodes are specifically designed to enhance the ESD performance of the device. The Zener voltage facilitates efficient and cost-effective device integrity protection, thus eliminating the need for additional external componentry.

## 2.1 Electrical characteristics curves

Figure 1. Safe operating area

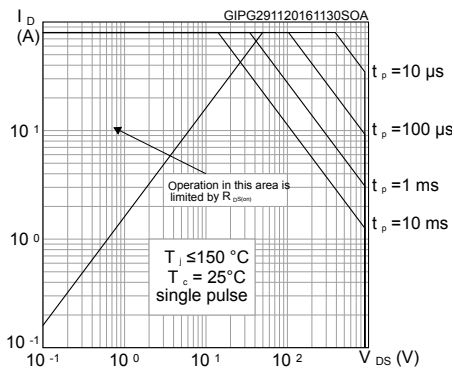


Figure 2. Thermal impedance

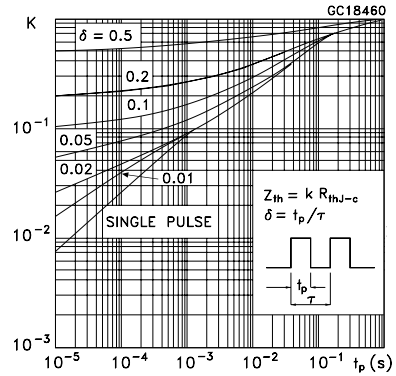


Figure 3. Output characteristics

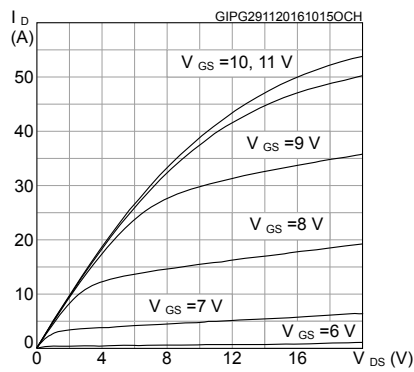


Figure 4. Transfer characteristics

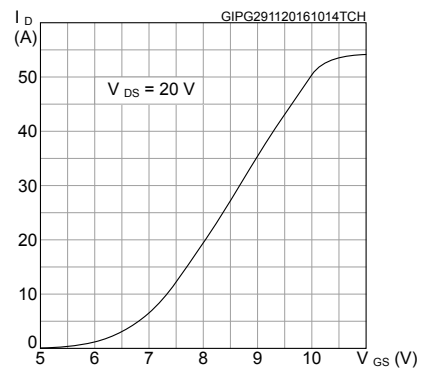


Figure 5. Normalized  $V_{(BR)DSS}$  vs temperature

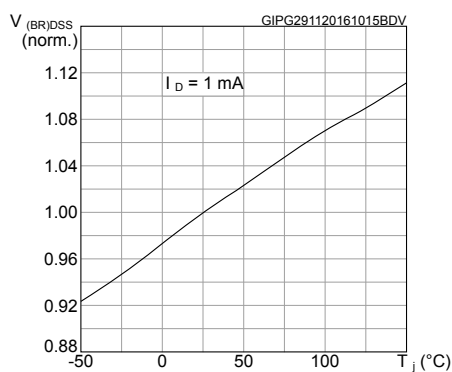


Figure 6. Static drain-source on-resistance

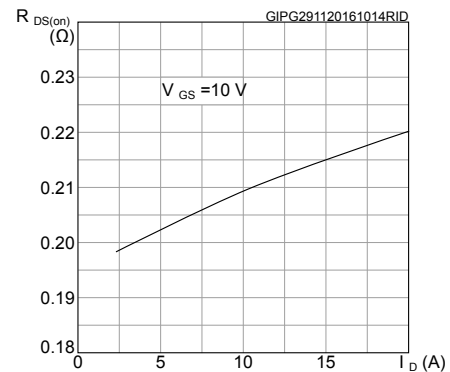


Figure 7. Gate charge vs gate-source voltage

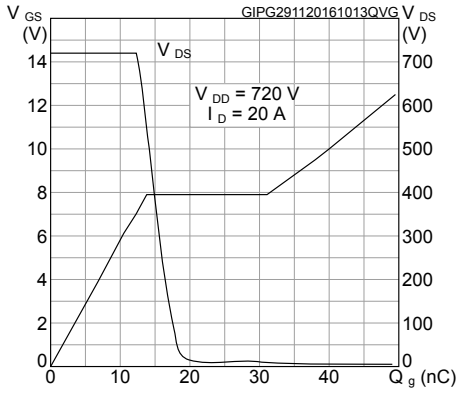


Figure 8. Capacitance variation

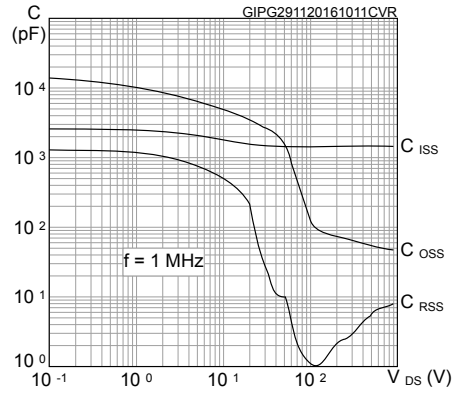


Figure 9. Normalized gate threshold voltage vs temperature

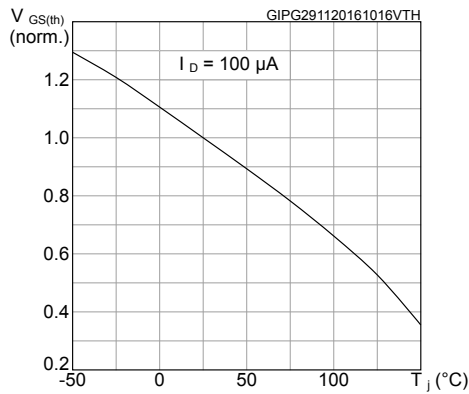


Figure 10. Normalized on-resistance vs temperature

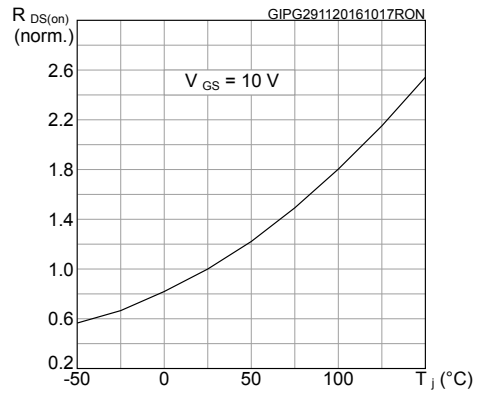


Figure 11. Maximum avalanche energy vs. starting T<sub>J</sub>



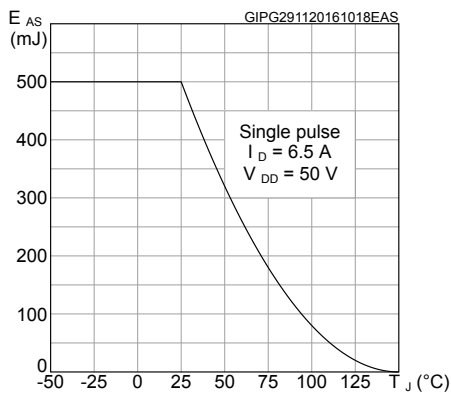



Figure 12. Source-drain diode forward characteristics

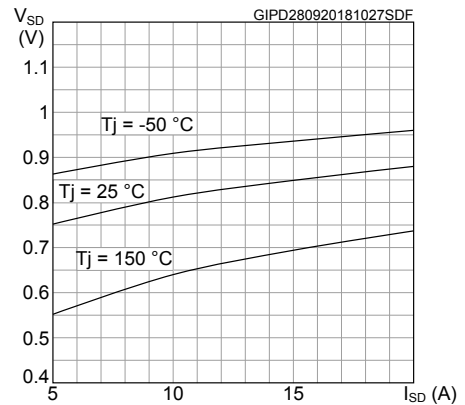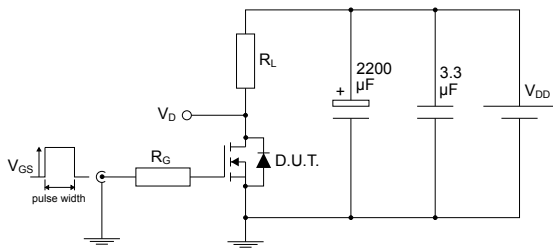


### 3 Test circuits

**Figure 13. Test circuit for resistive load switching times**


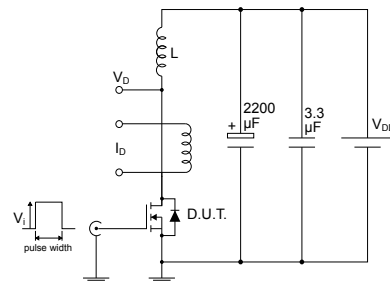
AM01468v1

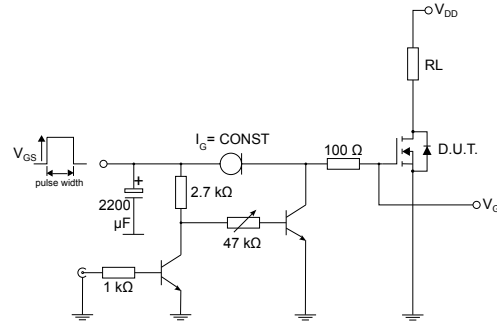**Figure 14. Test circuit for gate charge behavior**


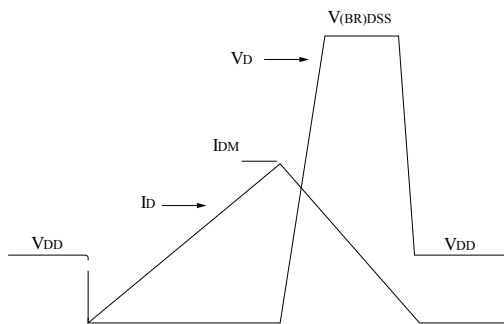
AM01469v10

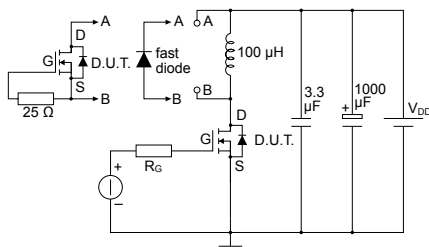**Figure 15. Test circuit for inductive load switching and diode recovery times**


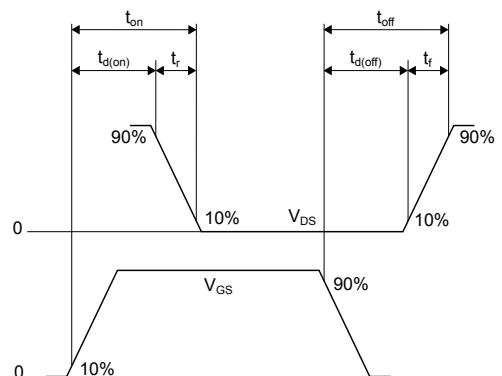
AM01470v1

**Figure 16. Unclamped inductive load test circuit**


AM01471v1

**Figure 17. Unclamped inductive waveform**


AM01472v1

**Figure 18. Switching time waveform**


AM01473v1

## 4 Package information


---

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.



### 4.1 TO-247 package information

Figure 19. TO-247 package outline

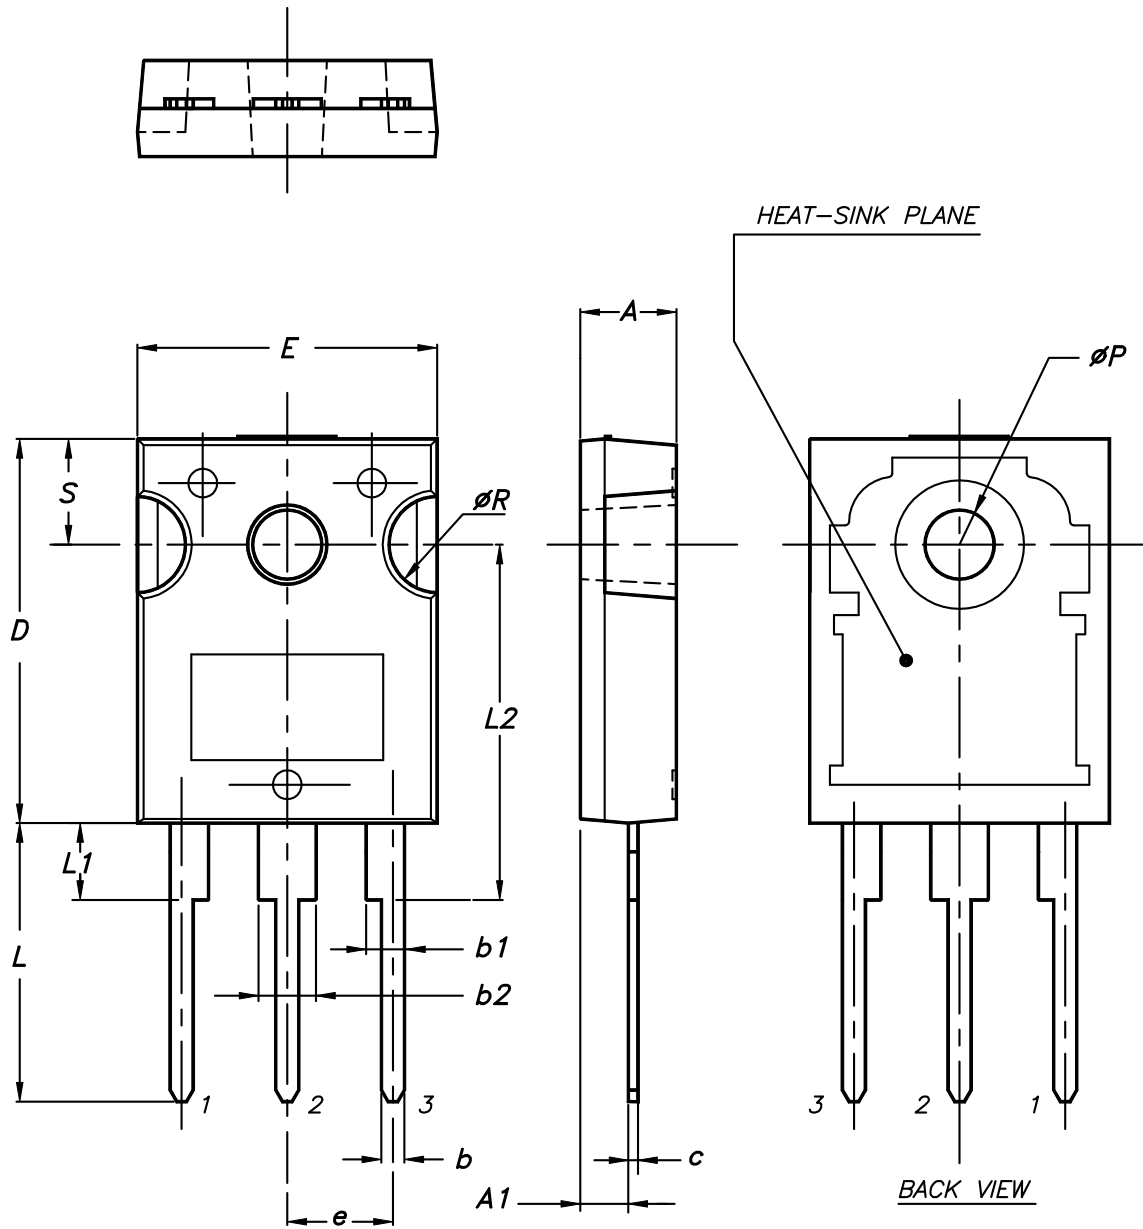

0075325\_9

**Table 9. TO-247 package mechanical data**

| Dim. | mm    |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 4.85  |       | 5.15  |
| A1   | 2.20  |       | 2.60  |
| b    | 1.0   |       | 1.40  |
| b1   | 2.0   |       | 2.40  |
| b2   | 3.0   |       | 3.40  |
| c    | 0.40  |       | 0.80  |
| D    | 19.85 |       | 20.15 |
| E    | 15.45 |       | 15.75 |
| e    | 5.30  | 5.45  | 5.60  |
| L    | 14.20 |       | 14.80 |
| L1   | 3.70  |       | 4.30  |
| L2   |       | 18.50 |       |
| ØP   | 3.55  |       | 3.65  |
| ØR   | 4.50  |       | 5.50  |
| S    | 5.30  | 5.50  | 5.70  |

## Revision history

**Table 10. Document revision history**

| Date        | Revision | Changes  |
|-------------|----------|--|
| 19-May-2016 | 1        | First release.   |
| 01-Dec-2016 | 2        | Modified: title and $R_{DS(on)}$ value in cover page<br>Modified: <i>Table 5. Avalanche characteristics</i> <i>Table 6. On/off-state</i> , <i>Table 7. Dynamic</i> , <i>Table 8. Switching times</i> and <i>Table 9. Source-drain diode</i><br>Added <i>Section 2.1 Electrical characteristics curves</i><br>Modified: <i>Section 3 Test circuits</i><br>Datasheet promoted from preliminary data to production data<br>Minor text changes |
| 01-Oct-2018 | 3        | Removed maturity status indication from cover page.<br>Updated <a href="#">Figure 12. Source-drain diode forward characteristics</a> .<br>Minor text changes.  |

## Contents

|            |  |           |
|------------|--|-----------|
| <b>1</b>   | <b>Electrical ratings</b> .....                  | <b>2</b>  |
| <b>2</b>   | <b>Electrical characteristics</b> .....          | <b>3</b>  |
| <b>2.1</b> | <b>Electrical characteristics (curves)</b> ..... | <b>5</b>  |
| <b>3</b>   | <b>Test circuits</b> .....                       | <b>7</b>  |
| <b>4</b>   | <b>Package information</b> .....                 | <b>8</b>  |
| <b>4.1</b> | <b>TO-247 package information</b> .....          | <b>8</b>  |
|            | <b>Revision history</b> .....                    | <b>11</b> |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved