

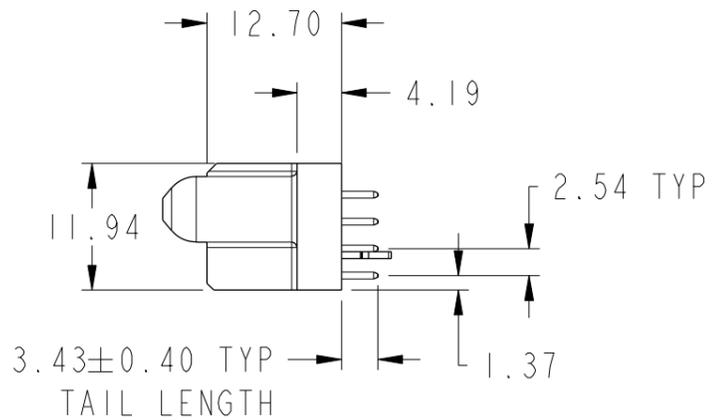
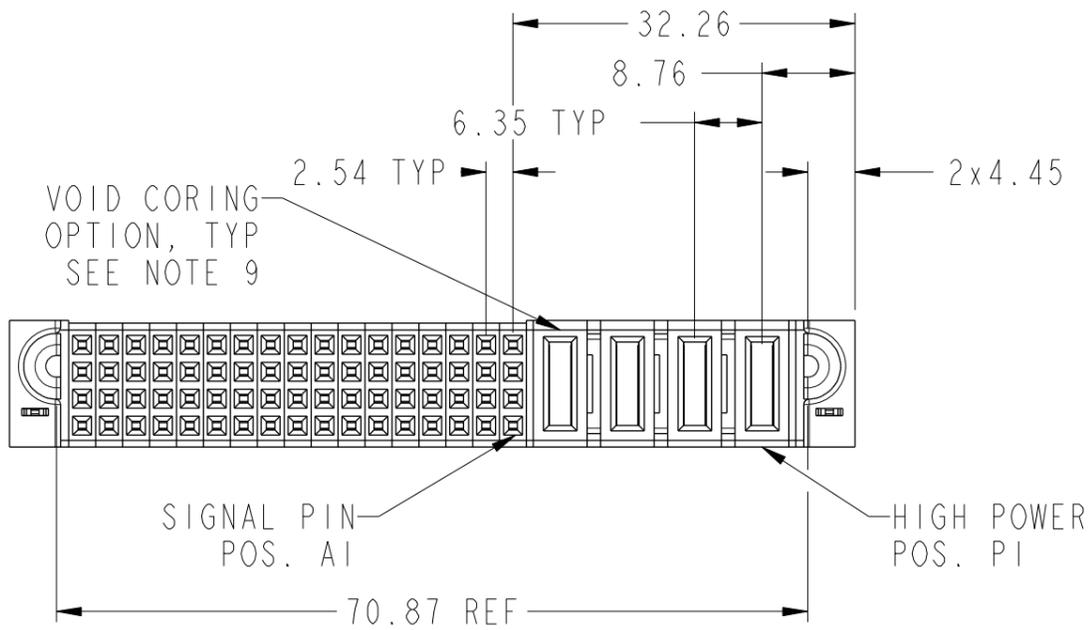


PRODUCT NUMBER SEE SHEET 2

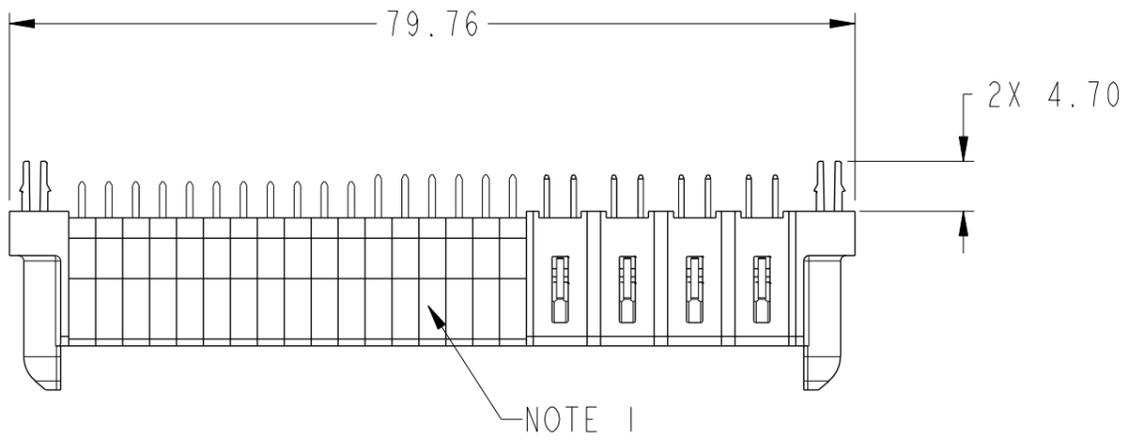

Copyright FCI.

spec ref		dr	Vicking Liu	2015/10/21	projection 	MM ←→	size	A3	scale	3:2	
tolerance std		eng	Vicking Liu	2015/11/02			ecn no	-			
ASME Y14.5		chr	Fancy Zhang	2015/11/02			rel level	Released			
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Pei-Ming Zheng	2015/11/02			product family	PowerBlade+			
surface	✓	linear	0.X	±0.50	www.fci.com	cat. no.	4HP + 68S VT STB RECEPTACLE	dwg no	10106130-4017002	rev	A
			0.XX	±0.25							
			0.XXX	±0.10							
ASME Y14.5		angular	0°	±2°	Product - Customer Drw		sheet 1 of 3				

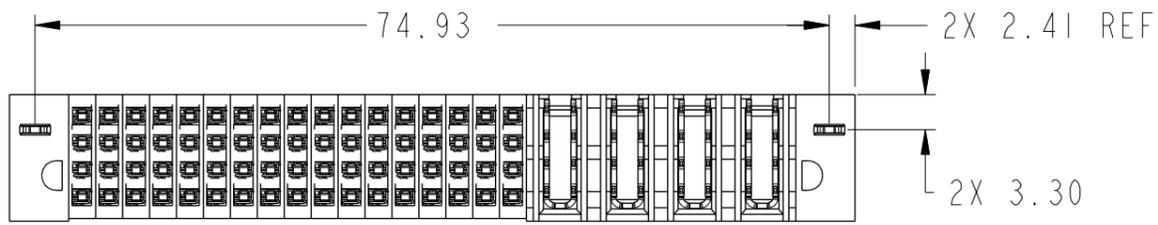

A

B

C

D

A

B

C


D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.  
APPLICATION SPECIFICATION: GS-20-141.  
PRODUCT PACKAGED IN TRAYS: GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL  
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE  
MAY BE DIFFERENT FOR OPTIMIZING THE MOLDING PROCESS. THE  
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.



Copyright FCI.

dr	Vicking Liu	2015/10/21	projection 	MM 	size	A3	scale	1:1
eng	Vicking Liu	2015/11/02			ecn no	-		
chr	Fancy Zhang	2015/11/02			product family	PowerBlade+	rel level	Released
appr	Pei-Ming Zheng	2015/11/02			 title 4HP + 68S VT STB RECEPTACLE		dwg no 10106130-4017002	rev A
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3			