

### Midi free-standing Beacons / EvoSIGNAL

## Midi Rotating 12/24V AC/DC GN



Part No.:	261.240.70		NoHS2		UK
Series:	EvoSIGNAL	7	<b>КОП</b> 32	C QL) US	CA

MECHANICAL DATA	
Height	130 mm
Diameter	85 mm
Materials	PC PC/ABS
Dome colour	Green
Housing colour	Grey
Protection category	IP66
Connection	Push-in terminal
cross-sectional area minimum	0,25mm <sup>2</sup> / 24AWG
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Type of fixing	Adapter required
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	213 g
Product weight	171 g

ELECTRICAL DATA	
Operating voltage	12V
	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	12 VDC
Rated operational current	120 mA
Rated inrush current	1A
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	III

OPTICAL DATA	
Light source	LED
Light colour	Green
Optical signal image	Revolving
Service life optical	50,000 h minimum
Rotation speed (rpm)	180 U/min
Pulse- & pause Duration [ms]	55ON, 278OFF

APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Midi free-standing Beacons / EvoSIGNAL

# Midi Rotating 12/24V AC/DC GN


Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
Conforms with AS-I ICAO Certification	No No
	1.12
ICAO Certification	No
ICAO Certification Conforms with DNV	No No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

# Midi Rotating 12/24V AC/DC GN

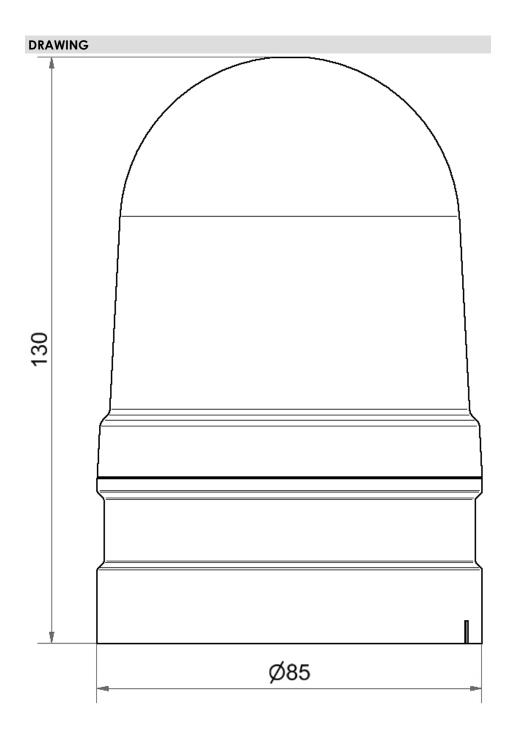

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.