

## “COMBO8” PFC + BALLAST CONTROL IC


### Features

- PFC, ballast control and half-bridge driver in one IC
- Critical-conduction mode boost-type PFC
- Internal VBUS sensing and regulation
- Internal PFC loop compensation
- Programmable PFC over-current
- Ignition voltage regulation (current or voltage control)
- Half-bridge non-ZVS protection
- Half-bridge over-current protection using low-side MOSFET Rdson
- Programmable preheat time
- Programmable preheat frequency
- Programmable ignition ramp time
- Programmable run frequency
- Voltage-controlled oscillator (VCO) analog input
- Latched EOL window comparator on VCC
- Internal EOL fault timer
- Fixed dead-time (1.7  $\mu$ sec typ.)
- DC bus under-voltage reset
- Lamp insert auto-restart
- Micro-power start-up current
- Under-voltage lock-out mode
- Small 8-pin SOIC package
- Lead-free

### Product Summary

Topology	Boost + Half-Bridge
V <sub>OFFSET</sub>	600 V
V <sub>BUS</sub>	470 V
I <sub>O+</sub> & I <sub>O-</sub> (typical)	180 mA & 260 mA
Dead-time	1.7 $\mu$ s

### Package Options

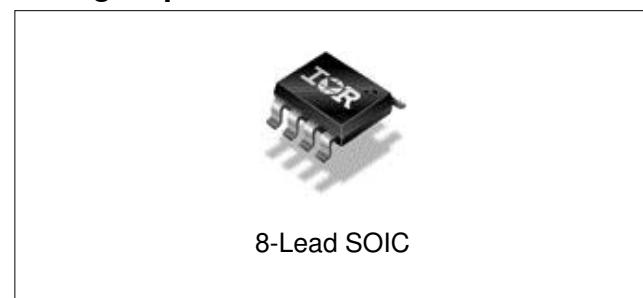

### Applications

- Electronic Ballast

### Typical Application Diagram

