


CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	NOMINAL ROD DIAMETER	LENGTH "M"	LENGTH "B"	BREAK STRENGTH* (LBS/N)	UL LISTED	CSA APPROVED	PRODUCT SELECTION NUMBER
35970	1300950194	.25-.36 / 6.4-9.1	.31 / 7.9	5.0±1.00 / 127±25	3.25±0.50 / 83±13	1700 / 7561	NO	YES	PJ25
35971	1300950196	.37-.49 / 9.4-12.4	.43 / 10.9	7.0±1.00 / 178±25	3.75±0.50 / 95±13	1700 / 7561			PJ37
35972	1300950197	.50-.61 / 12.7-15.5	.56 / 14.2	8.0±1.50 / 203±38	4.25±0.50 / 108±13	1700 / 7561			PJ50
35973	1300950198	.62-.74 / 15.7-18.8	.68 / 17.3	10.0±1.50 / 254±38	5.00±0.50 / 127±13	2800 / 12455			PJ62
35974	1300950200	.75-.99 / 19.1-25.1	.87 / 22.1	10.0±1.50 / 254±38	5.75±0.50 / 146±13	4100 / 18238			PJ75
35975	1300950201	1.00-1.24 / 25.4-31.5	1.12 / 28.4	12.0±1.50 / 305±38	6.50±1.00 / 165±25	4100 / 18238			PJ100

\*TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 5.

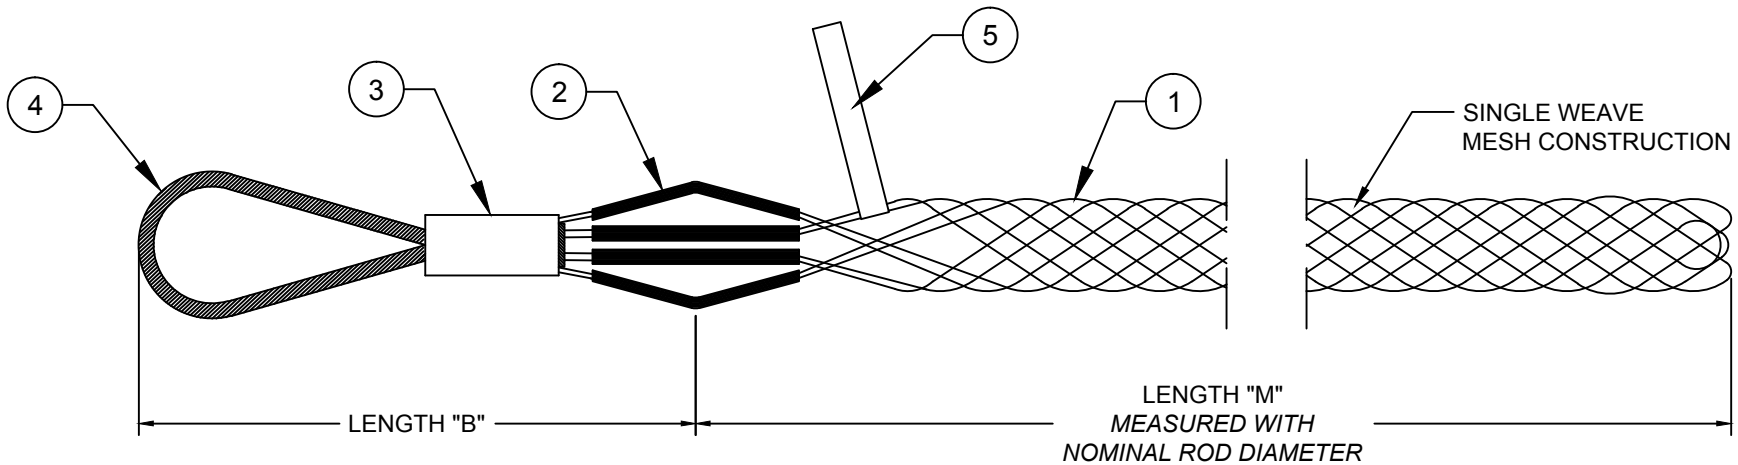

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	GALVANIZED STEEL
2	SHOULDER PROTECTOR	NYLON
3	FERRULE	ALUMINUM
4	BALE WIRE	GALVANIZED STEEL
5	LABEL	MYLAR

RELEASE SALES DRAWINGS EC NO: ICG2014-1487 DRWN: HRUIZ01 2014/05/13 CHKD: HKNEELAN 2014/05/13 APPR: JFMURPHY 2014/10/14	QUALITY SYMBOLS ▽=0 ▽C=0
DESCRIPTION	REV
A	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	±--- ±---
3 PLACES	±--- ±.005
2 PLACES	±.13 ±.010
1 PLACE	±.25 ±.020
ANGULAR ±1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE INCH/MM	
DRAWN BY	DATE
HRUIZ01	2014/05/13
CHECKED BY	DATE
HKNEELAN	2014/05/13
APPROVED BY	DATE
JFMURPHY	2014/10/14
MATERIAL NO.	SEE TABLE
SIZE	A

SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
TITLE		
PULLING GRIPS JUNIOR DUTY FLEXIBLE EYE		
MOLEX INCORPORATED		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
	SD-130095-100	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		