

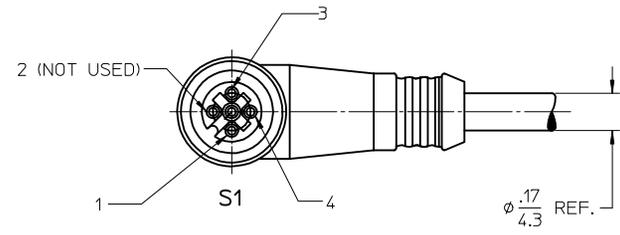


MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH
1200661919	843033B03M050	16'5" +6.50"-0 (5M +165.1mm-0)

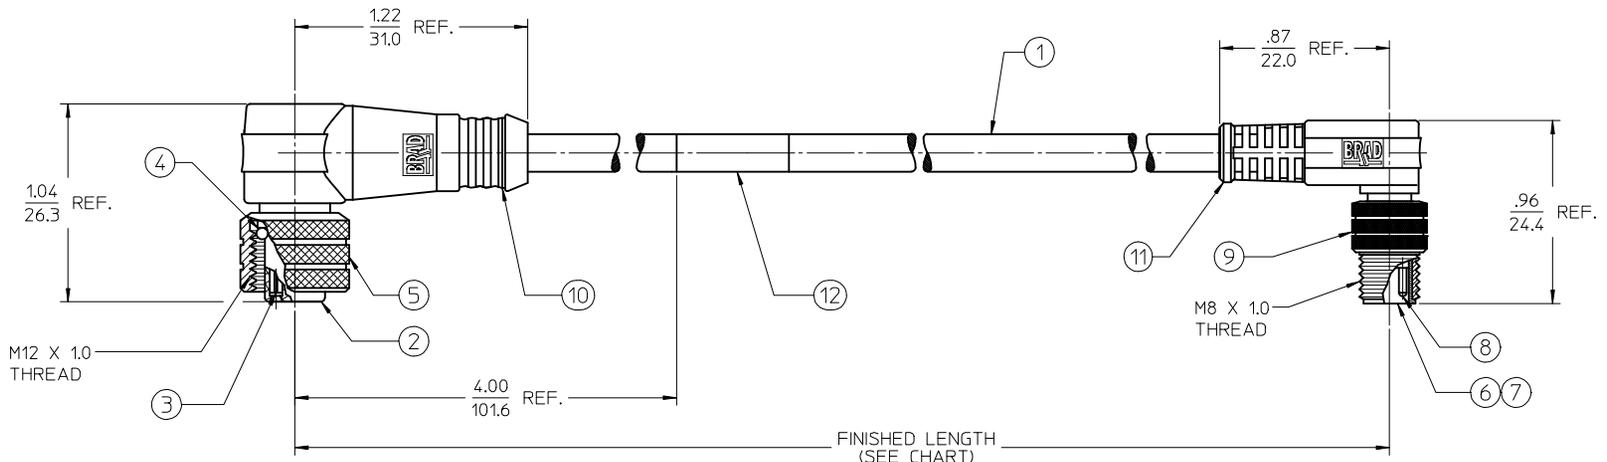


FEMALE FACE VIEW

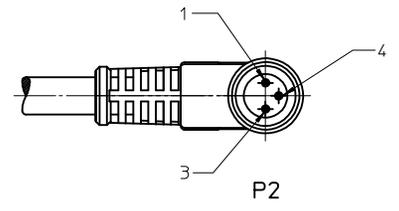

MALE FACE VIEW

- NOTES:
1. MATERIAL: SEE TABLE
  2. FINISHES: SEE TABLE
  3. ELECTRICAL SPECIFICATIONS  
VOLTAGE RATING: 60VAC/75VDC  
CURRENT RATING: 4 AMPS
  4. PROTECTION: IP67
  5. ASSEMBLY IS RoHS COMPLIANT BY EXEMPTION

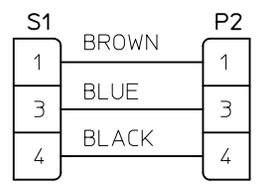

WIRING DIAGRAM

12	1	WRAP LABEL	VINYL	BLACK/YELLOW
11	1	NC OVERMOLD	TPE	YELLOW
10	1	MIC OVERMOLD	TPE	YELLOW
9	1	NC COUPLING	BRASS	NICKEL PLATED
8	3	CONTACT PIN	Cu ALLOY	GOLD PLATED
7	1	NC SLEEVE	Cu ALLOY	NICKEL PLATED
6	1	NC INSERT, 3P MALE	PUR	BLACK
5	1	MIC COUPLING	ZINC DIE-CAST	BLACK
4	1	O-RING	VITON	RED
3	3	MIC CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	MIC INSERT, 3P, FEMALE	NYLON	BLACK
1	A/R	CABLE, 22/3 HI-FLEX	PUR JACKET	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED  
EC NO: IPG2013-1600  
DRAWN BY: RSTONE 2013/04/12  
CHKD BY: JOZWIK 2013/04/17  
APPR: JF MURPHY 2013/05/04

QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
	4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	2 PLACES ± --- ± .01	1 PLACE ± 0.3 ± ---	0 PLACE ± --- ± ---	DRAWN BY: RSTONE DATE: 2013/04/12 CHECKED BY: K JOZWIK DATE: 2013/04/17 APPROVED BY: JF MURPHY DATE: 2013/05/04	
ANGULAR ± 2 °		MATERIAL NO. <b>SEE CHART</b>		DOCUMENT NO. <b>SD-120066-206</b>		SHEET NO. 1 OF 1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							