

Q28-100GP4-BXD3327-10-C-C

Cisco® Compatible 100GBase-BX QSFP28 Single Lambda Transceiver (SMF, 1331nmTx/1271nmRx, 10km, LC, DOM, with FEC)

Features:

- Compliant with 100G Lambda MSA 100G-LR Specifications
- Compliant with SFF-8636 Rev 2.10a
- Single 3.3V Power Supply
- Power dissipation
- Single-mode Fiber
- Bidi LC Connectors
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



Applications:

- 100GBase Ethernet
- Datacenter

Product Description

This Cisco® QSFP28 transceiver provides 100GBase-BX throughput up to 10km over single-mode fiber (SMF) using a wavelength of 1331nmTx/1271nmRx via an LC connector. It is guaranteed to be 100% compatible with the equivalent Cisco® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4.
- ESD to the LC Receptacle: compatible with IEC 61000-4-3.
- EMI/EMC: compatible with FCC Part 15 Subpart B Rules, EN55022:2010.
- Laser Eye Safety: compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1, 2.
- RoHS: compliant with EU RoHS 2.0 directive 2015/863/EU.

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|----------------------------|--------|------|------|------|------|-------|
| Maximum Supply Voltage | Vcc | -0.5 | | 3.6 | V | |
| Storage Temperature | Tstg | -40 | | 85 | °C | |
| Operating Case Temperature | Tc | 0 | | 70 | °C | |
| Relative Humidity | RH | 5 | | 85 | % | |
| Damage Threshold | RXdmg | 5.5 | | | dBm | |

Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|--|-------------------|-------|------|-------|-------|-------------------------|
| Power Supply Voltage | Vcc | 3.135 | 3.3 | 3.465 | V | |
| Power Dissipation | P _{DISS} | | | 4.5 | W | |
| Transmitter | | | | | | |
| Differential Data Input Swing Per Lane | | 900 | | | mVp-p | |
| Differential Input Impedance | ZIN | 90 | 100 | 110 | Ω | |
| DC Common-Mode Voltage (Vcm) | | -350 | | 2850 | mV | |
| Receiver | | | | | | |
| Differential Output Amplitude | | | | 900 | mVp-p | |
| Differential Output Impedance | ZOUT | 90 | 100 | 110 | Ω | |
| Output Rise/Fall Time | Tr/Tf | 12 | | | ps | 20-80% |
| Eye Width | | 0.57 | | | UI | |
| Eye Height Differential | | 228 | | | mV | @TP4, 1E ⁻¹⁵ |
| DC Common-Mode Voltage (Vcm) | | -350 | | 2850 | mV | 1 |

Notes:

1. Vcm is generated by the host. Specification includes effects of ground offset voltage.

Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|--|-------------|--------|--------|----------------------|-------|-------|
| Transmitter | | | | | | |
| Signaling Speed | | | 53.125 | | GBd | |
| Modulation Format | | PAM4 | | | | |
| Center Wavelength | λ_C | 1324.5 | 1331 | 1337.5 | Nm | |
| Side-Mode Suppression Ratio | SMSR | 30 | | | dB | |
| Extinction Ratio | ER | 3.5 | | | dB | |
| Transmit OMA | TxOMA | 0.7 | | 4.7 | dBm | |
| Transmit Average Power | TxAVG | -1.4 | | 4.5 | dBm | 1 |
| Launch Power in OMA _{outer} Minus TDECQ | | -0.7 | | | dBm | 2 |
| Launch Power in OMA _{outer} Minus TDECQ | | -0.6 | | | dBm | 3 |
| Transmitter and Dispersion Eye Closure | TDECQ | | | 3.4 | dB | |
| Launch Power of Off Transmitter Per Lane | | | | -30 | dBm | |
| Relative Intensity Noise | RIN | | | -136 | dB/Hz | |
| Optical Return Loss Tolerance | | | | 15.6 | dB | 4 |
| Transmitter Reflectance | | | | -26 | dB | |
| Receiver | | | | | | |
| Signaling Speed | | | 53.125 | | GBd | |
| Center Wavelength | λ_C | 1264.5 | 1271 | 1277.5 | Nm | |
| Damage Threshold | | 5.5 | | | dBm | |
| Receive Power (OMA _{outer}) | RxOMA | | | 4.7 | dBm | |
| Average Receive Power | RxAVG | -7.7 | | 4.5 | dBm | |
| Receiver Sensitivity (OMA _{outer}) | SenOMA | | | MAX (-6.1, SECQ-7.5) | dBm | 5 |
| Stressed Sensitivity | SRS | | | -4.1 | dBm | |
| Receiver Reflectance | | | | -26 | dB | |
| LOS Assert | LOSA | -26 | | -12 | dBm | |
| LOS De-Assert | LOSD | | | -10 | dBm | |

Notes:

1. Average launch power (minimum) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. For ER \geq 4.5dB.
3. For ER $<$ 4.5dB.
4. Transmitter reflectance is defined looking into the transmitter.
5. Sensitivity is specified at 2.4×10^{-4} BER.

Pin Descriptions


| Pin | Logic | Symbol | Name/Descriptions | Notes |
|-----|------------|---------|---------------------------------------|-------|
| 1 | | GND | Module Ground. | 1 |
| 2 | CML-I | Tx2- | Transmitter Inverted Data Input. | |
| 3 | CML-I | Tx2+ | Transmitter Non-Inverted Data Output. | |
| 4 | | GND | Module Ground. | 1 |
| 5 | CML-I | Tx4- | Transmitter Inverted Data Input. | |
| 6 | CML-I | Tx4+ | Transmitter Non-Inverted Data Output. | |
| 7 | | GND | Module Ground. | 1 |
| 8 | LVTLL-I | ModSelL | Module Select. | |
| 9 | LVTLL-I | ResetL | Module Reset. | |
| 10 | | VccRx | +3.3V Receiver Power Supply. | 2 |
| 11 | LVCMOS-I/O | SCL | 2-Wire Serial Interface Clock. | |
| 12 | LVCMOS-I/O | SDA | 2-Wire Serial Interface Data. | |
| 13 | | GND | Module Ground. | |
| 14 | CML-O | Rx3+ | Receiver Non-Inverted Data Output. | |
| 15 | CML-O | Rx3- | Receiver Inverted Data Output. | |
| 16 | | GND | Module Ground. | 1 |
| 17 | CML-O | Rx1+ | Receiver Non-Inverted Data Output. | |
| 18 | CML-O | Rx1- | Receiver Inverted Data Output. | |
| 19 | | GND | Module Ground. | 1 |
| 20 | | GND | Module Ground. | 1 |
| 21 | CML-O | Rx2- | Receiver Inverted Data Output. | |
| 22 | CML-O | Rx2+ | Receiver Non-Inverted Data Output. | |
| 23 | | GND | Module Ground. | 1 |
| 24 | CML-O | Rx4- | Receiver Inverted Data Output. | 1 |
| 25 | CML-O | Rx4+ | Receiver Non-Inverted Data Output. | |
| 26 | | GND | Module Ground. | 1 |
| 27 | LVTTL-O | ModPrsL | Module Present. | |
| 28 | LVTTL-O | IntL | Interrupt. | |
| 29 | | VccTx | +3.3V Transmitter Power Supply. | 2 |
| 30 | | Vcc1 | +3.3V Power Supply. | 2 |
| 31 | LVTTL-I | LPMoDe | Low-Power Mode. | |
| 32 | | GND | Module Ground. | 1 |
| 33 | CML-I | Tx3+ | Transmitter Non-Inverted Data Input. | |
| 34 | CML-I | Tx3- | Transmitter Inverted Data Output. | |
| 35 | | GND | Module Ground. | 1 |

| | | | | |
|----|-------|------|--------------------------------------|---|
| 36 | CML-I | Tx1+ | Transmitter Non-Inverted Data Input. | |
| 37 | CML-I | Tx1- | Transmitter Inverted Data Output. | |
| 38 | | GND | Module Ground. | 1 |


Notes:

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. VccRx, Vcc1, and VccTx are the receiver and transmitter power supplies and shall be applied concurrently. Recommended host board power supply filtering is shown below. VccRx, Vcc1, and VccTx may be internally connected within the QSFP28 transceiver module in any combination. The connector pins are each rated for a maximum current of 1000mA.

Electrical Pin-Out Details

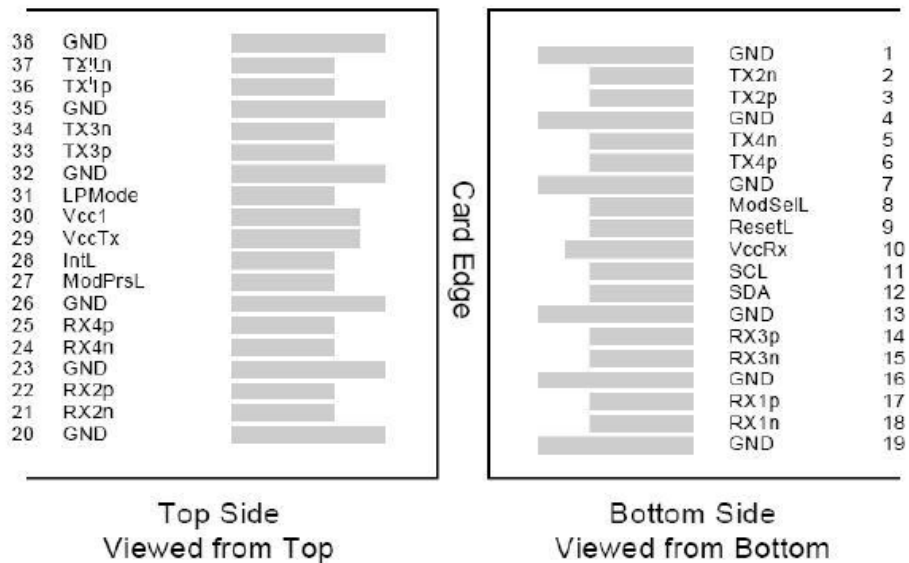

Mechanical Specifications

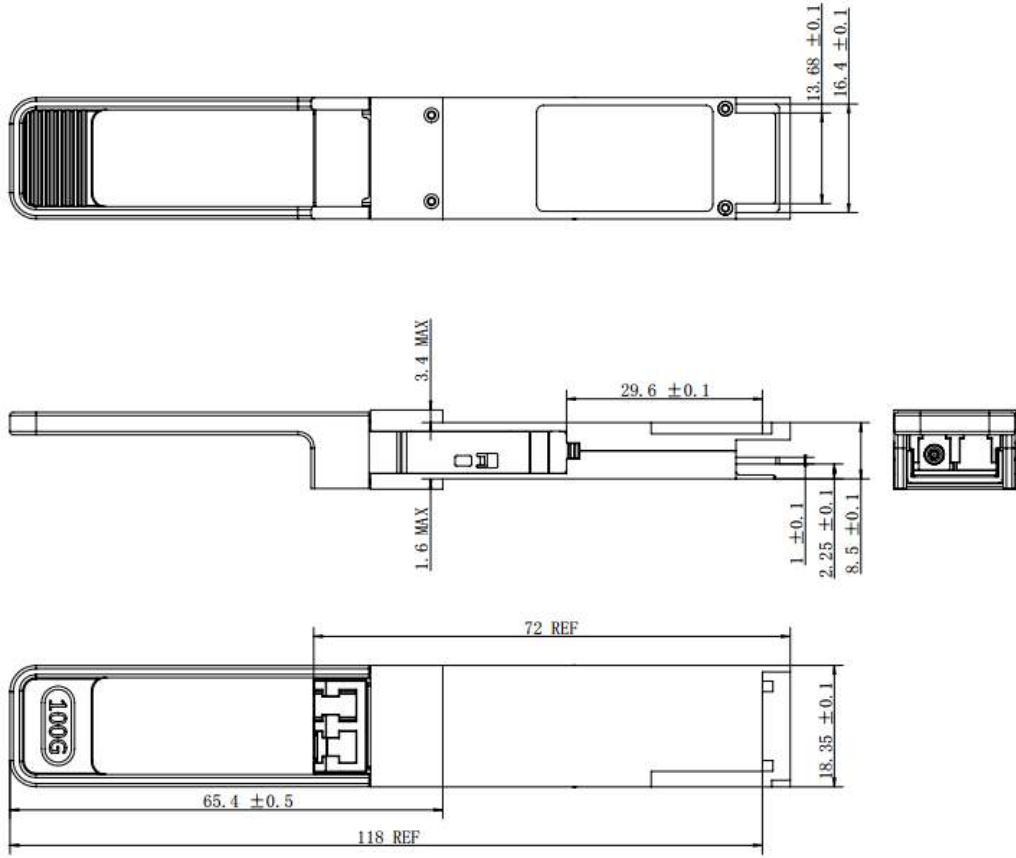

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.

Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salessupport@prolabs.com

Telephone: +44 1285 719 600