


- Low $r_{DS(on)}$:
 - 0.25 Ω Typ (Full H-Bridge)
 - 0.4 Ω Typ (Triple Half H-Bridge)
- Pulsed Current . . . 4 A Per Channel
- Matched Sense Transistors for Class A-B Linear Operation
- Fast Commutation Speed


description

The TPIC1502 is a monolithic power DMOS array that consists of ten electrically isolated N-channel enhancement-mode power DMOS transistors, four of which are configured as a full H-bridge and six as a triple half H-bridge. The lower stage of the full H-bridge is provided with an integrated sense-FET to allow biasing of the bridge in class A-B operation.

The TPIC1502 is offered in a 24-pin wide-body surface-mount (DW) package and is characterized for operation over the case temperature range of -40°C to 125°C .

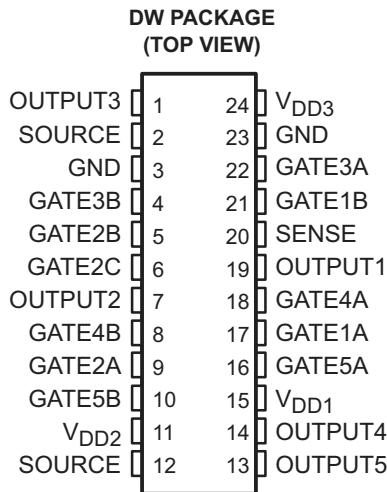

schematic

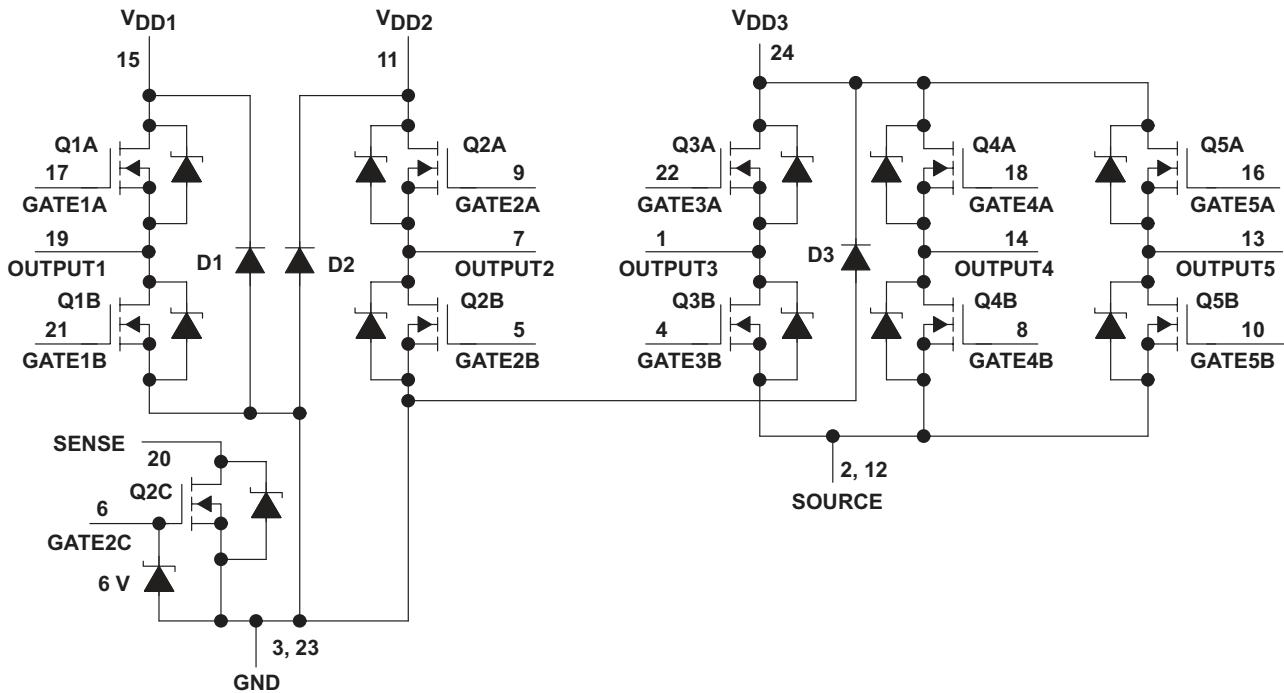

NOTES: A. Terminals 3 and 23 must be externally connected.
 B. Terminals 2 and 12 must be externally connected.
 C. No output may be taken greater than 0.5 V below GND.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

TPIC1502

QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

absolute maximum ratings, $T_C = 25^\circ\text{C}$ (unless otherwise noted)[†]

Supply-to-GND voltage	20 V
Source-to-GND voltage (Q3A, Q4A, Q5A)	20 V
Output-to-GND voltage	20 V
Sense-to-GND voltage	20 V
Gate-to-source voltage range, V_{GS} (Q1A, Q1B, Q2A, Q2B, Q3A, Q3B, Q4A, Q4B, Q5A, Q5B)	± 20 V
Gate-to-source voltage, V_{GS} (Q2C)	-0.7 V to 6 V
Continuous gate-to-source zener-diode current (Q2C)	± 10 mA
Pulsed gate-to-source zener-diode current (Q2C)	± 50 mA
Continuous drain current, each output (Q1A, Q1B, Q2A, Q2B)	1.5 A
Continuous drain current, each output (Q3A, Q3B, Q4A, Q4B, Q5A, Q5B)	1.5 A
Continuous drain current (Q2C)	5 mA
Continuous source-to-drain diode current (Q1A, Q1B, Q2A, Q2B)	1.5 A
Continuous source-to-drain diode current (Q3A, Q3B, Q4A, Q4B, Q5A, Q5B)	1.5 A
Continuous source-to-drain diode current (Q2C)	5 mA
Pulsed drain current, each output, I_{max} (Q1A, Q1B, Q2A, Q2B) (see Note 1 and Figure 24)	4 A
Pulsed drain current, each output, I_{max} (Q3A, Q3B, Q4A, Q4B, Q5A, Q5B) (see Note 1 and Figure 25)	4 A
Pulsed drain current, each output, I_{max} (Q2C) (see Note 1)	20 mA
Continuous total power dissipation, $T_C = 70^\circ\text{C}$ (see Note 2 and Figures 24 and 25)	2.86 W
Operating virtual junction temperature range, T_J	-40°C to 150°C
Operating case temperature range, T_C	-40°C to 125°C
Storage temperature range, T_{stg}	-65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. Pulse duration = 10 ms, duty cycle = 2%
2. Package mounted in intimate contact with infinite heat sink.

electrical characteristics, Q1A, Q1B, Q2A, Q2B, $T_C = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
$V_{(\text{BR})\text{DSX}}$	Drain-to-source breakdown voltage	$I_D = 250 \mu\text{A}$, $V_{GS} = 0$	20			V
$V_{GS(\text{th})}$	Gate-to-source threshold voltage	$I_D = 1 \text{ mA}$, $V_{DS} = V_{GS}$, See Figure 5	1.5	1.85	2.2	V
$V_{GS(\text{th})\text{match}}$	Gate-to-source threshold voltage matching	$I_D = 1 \text{ mA}$, $V_{DS} = V_{GS}$		40		mV
$V_{(\text{BR})}$	Reverse drain-to-GND breakdown voltage	Drain-to-GND current = $250 \mu\text{A}$ (D1, D2)	20			V
$V_{(\text{BR})\text{GS}}$	Gate-to-source breakdown voltage, Q2C	$I_{GS} = 100 \mu\text{A}$	6			V
$V_{(\text{BR})\text{SG}}$	Source-to-gate breakdown voltage, Q2C	$I_{GS} = 100 \mu\text{A}$	0.7			V
$V_{(\text{DS})\text{on}}$	Drain-to-source on-state voltage	$I_D = 1.5 \text{ A}$, $V_{GS} = 10 \text{ V}$, See Notes 3 and 4		0.375	0.45	V
V_F	Forward on-state voltage, GND-to- V_{DD1} , GND-to- V_{DD2}	$I_D = 1.5 \text{ A}$ (D1, D2) See Notes 3 and 4		1.5		V
$V_F(\text{SD})$	Forward on-state voltage, source-to-drain	$I_S = 1.5 \text{ A}$, $V_{GS} = 0$, See Notes 3 and 4 and Figure 19	0.93	1.2		V
I_{DSS}	Zero-gate-voltage drain current	$V_{DS} = 16 \text{ V}$,	$T_C = 25^\circ\text{C}$	0.05	1	μA
		$V_{GS} = 0$	$T_C = 125^\circ\text{C}$	0.5	10	
I_{GSSF}	Forward gate current, drain short-circuited to source	$V_{GS} = 16 \text{ V}$, $V_{DS} = 0$	10	100		nA
I_{GSSR}	Reverse gate current, drain short-circuited to source	$V_{SG} = 16 \text{ V}$, $V_{DS} = 0$	10	100		nA
I_{lkg}	Leakage current, V_{DD1} -to-GND, V_{DD2} -to-GND, gate shorted to source	$V_{DGND} = 16 \text{ V}$	$T_C = 25^\circ\text{C}$	0.05	1	μA
			$T_C = 125^\circ\text{C}$	0.5	10	
$r_{DS(\text{on})}$	Static drain-to-source on-state resistance	$V_{GS} = 10 \text{ V}$, $I_D = 1.5 \text{ A}$, See Notes 3 and 4 and Figure 9	$T_C = 25^\circ\text{C}$	0.25	0.3	Ω
			$T_C = 125^\circ\text{C}$	0.38	0.51	
g_{fs}	Forward transconductance	$V_{DS} = 14 \text{ V}$, $I_D = 750 \text{ mA}$, See Notes 3 and 4 and Figure 13	0.75	1.2		S
C_{iss}	Short-circuit input capacitance, common source	$V_{DS} = 14 \text{ V}$, $f = 1 \text{ MHz}$, $V_{GS} = 0$, See Figure 17		98		pF
C_{oss}	Short-circuit output capacitance, common source			70		
C_{rss}	Short-circuit reverse transfer capacitance, common source			54		
α_s	Sense-FET drain current ratio	$V_{DS} = 6 \text{ V}$, $I_{D(Q2B)} = 1.5 \text{ mA}$	100	150	200	

NOTES: 3. Technique should limit $T_J - T_C$ to 10°C maximum.

4. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts.

source-to-drain diode characteristics, Q1A, Q2A, $T_C = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
t_{rr}	Reverse-recovery time	$I_S = 750 \text{ mA}$, $V_{GS} = 0$, $V_{DS} = 14 \text{ V}$, di/dt = $100 \text{ A}/\mu\text{s}$, See Figures 1 and 23		18		ns
Q_{RR}	Total diode charge			14	nC	

TPIC1502

QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

resistive-load switching characteristics, Q1A, Q1B, Q2A, Q2B, $T_C = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{d(on)}$	$V_{DD} = 14 \text{ V}, R_L = 18.7 \Omega, t_{en} = 10 \text{ ns},$ $t_{dis} = 10 \text{ ns},$ See Figure 3	12			ns
$t_{d(off)}$		13			
t_r		2.2			
t_f		6			
Q_g	$V_{DS} = 14 \text{ V}, I_D = 750 \text{ mA}, V_{GS} = 10 \text{ V},$ See Figure 4 and Figure 21	1.7	2.1		nC
$Q_{gs(th)}$		0.3	0.4		
Q_{gd}		0.4	0.5		
L_D		7			nH
L_S		7			
R_g		0.25			Ω

electrical characteristics, Q3A, Q3B, Q4A, Q4B, Q5A, Q5B, $T_C = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{(BR)DSX}$	Drain-to-source breakdown voltage $I_D = 250 \mu\text{A}, V_{GS} = 0$	20			V
$V_{GS(th)}$	Gate-to-source threshold voltage $I_D = 1 \text{ mA}, V_{DS} = V_{GS},$ See Figure 6	1.5	1.85	2.2	V
$V_{(BR)}$	Reverse drain-to-GND breakdown voltage Drain-to-GND current = $250 \mu\text{A}$ (D3)	20			V
$V_{(DS)on}$	Drain-to-source on-state voltage $I_D = 1.5 \text{ A}, V_{GS} = 10 \text{ V},$ See Notes 3 and 4		0.6	0.75	V
V_F	Forward on-state voltage, GND-to- V_{DD3} $I_D = 1.5 \text{ A}$ (D3), See Notes 3 and 4		1.5		V
$V_F(SD)$	Forward on-state voltage, source-to-drain $I_S = 1.5 \text{ A}, V_{GS} = 0$ See Notes 3 and 4 and Figure 20		1	1.2	V
I_{DSS}	Zero-gate-voltage drain current $V_{DS} = 16 \text{ V}, V_{GS} = 0$	0.05	1		μA
			0.5	10	
I_{GSSF}	Forward gate current, drain short-circuited to source $V_{GS} = 16 \text{ V}, V_{DS} = 0$	10	100		nA
I_{GSSR}	Reverse gate current, drain short-circuited to source $V_{SG} = 16 \text{ V}, V_{DS} = 0$	10	100		nA
I_{lkg}	Leakage current, V_{DD3} -to-GND, gate shorted to source $V_{DGND} = 16 \text{ V}$	0.05	1		μA
			0.5	10	
$r_{DS(on)}$	Static drain-to-source on-state resistance $V_{GS} = 10 \text{ V}, I_D = 1.5 \text{ A},$ See Notes 3 and 4 and Figure 10	0.4	0.5		Ω
		0.61	0.85		
g_{fs}	Forward transconductance $V_{DS} = 14 \text{ V}, I_D = 750 \text{ mA},$ See Notes 3 and 4 and Figure 14	0.4	0.74		
C_{iss}	Short-circuit input capacitance, common source	73			pF
C_{oss}	Short-circuit output capacitance, common source $V_{DS} = 14 \text{ V}, f = 1 \text{ MHz},$	65			
C_{rss}	Short-circuit reverse transfer capacitance, common source See Figure 18	43			

NOTES: 3: Technique should limit $T_J - T_C$ to 10°C maximum.

4: These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts.

source-to-drain diode characteristics, Q3A, Q4A, Q5A, $T_C = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{rr} Reverse-recovery time	$I_S = 750 \text{ mA}, V_{GS} = 0, V_{DS} = 14 \text{ V}, \frac{di}{dt} = 100 \text{ A}/\mu\text{s},$ See Figures 2 and 23	26			ns
Q_{RR} Total diode charge			17		nc

resistive-load switching characteristics, Q3A, Q3B, Q4A, Q4B, Q5A, Q5B, $T_C = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{d(on)}$ Turn-on delay time	$V_{DD} = 14 \text{ V}, R_L = 18.7 \Omega, t_{en} = 10 \text{ ns},$ $t_{dis} = 10 \text{ ns},$ See Figure 3	13			ns
$t_{d(off)}$ Turn-off delay time		13			
t_r Rise time		3			
t_f Fall time		7			
Q_g Total gate charge	$V_{DS} = 14 \text{ V}, I_D = 750 \text{ mA}, V_{GS} = 10 \text{ V},$ See Figure 4 and Figure 22	1	1.3		nC
$Q_{gs(th)}$ Threshold gate-to-source charge		0.2	0.25		
Q_{gd} Gate-to-drain charge		0.2	0.25		
L_D Internal drain inductance		7			nH
L_S Internal source inductance		7			
R_g Internal gate resistance		0.25			Ω

thermal resistance

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$R_{\theta JA}$ Junction-to-ambient thermal resistance	See Notes 5 and 8	90			°C/W
$R_{\theta JB}$ Junction-to-board thermal resistance		52			
$R_{\theta JP}$ Junction-to-pin thermal resistance		28			

- NOTES: 5. Package mounted on a FR4 printed-circuit board with no heatsink.
 6. Package mounted on a 24 in², 4-layer FR4 printed-circuit board.
 7. Package mounted in intimate contact with infinite heatsink.
 8. All outputs with equal power

TPIC1502 QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

PARAMETER MEASUREMENT INFORMATION

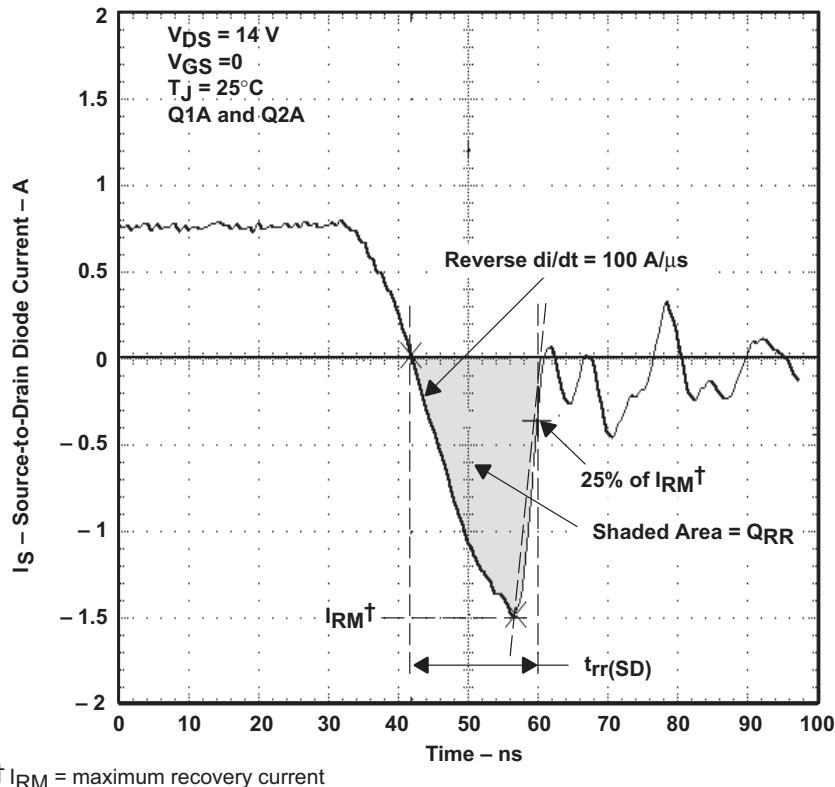


Figure 1. Reverse-Recovery-Current Waveform of Source-to-Drain Diodes

PARAMETER MEASUREMENT INFORMATION

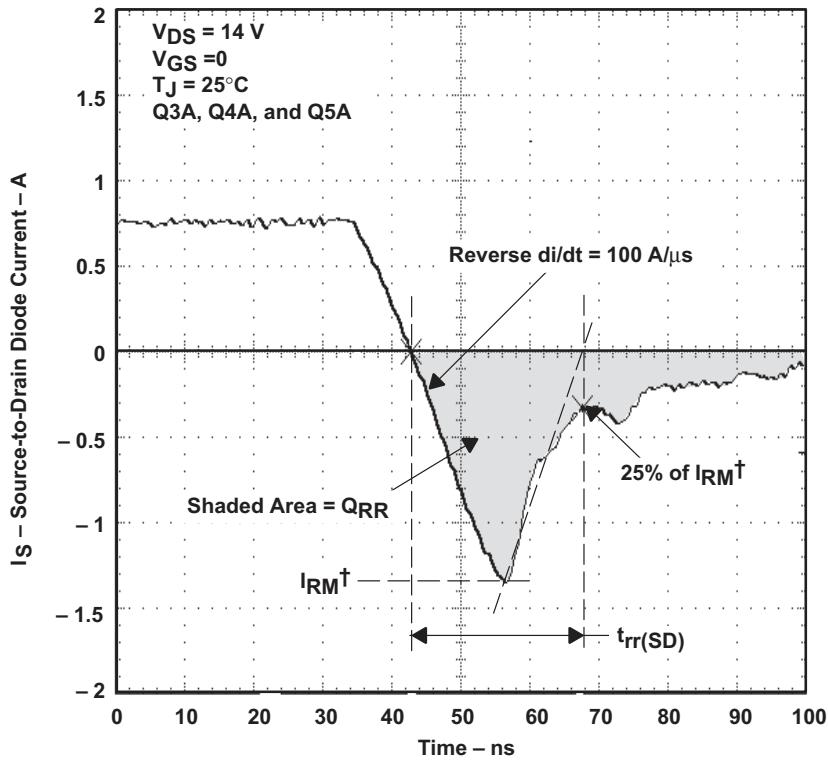


Figure 2. Reverse-Recovery-Current Waveform of Source-to-Drain Diodes

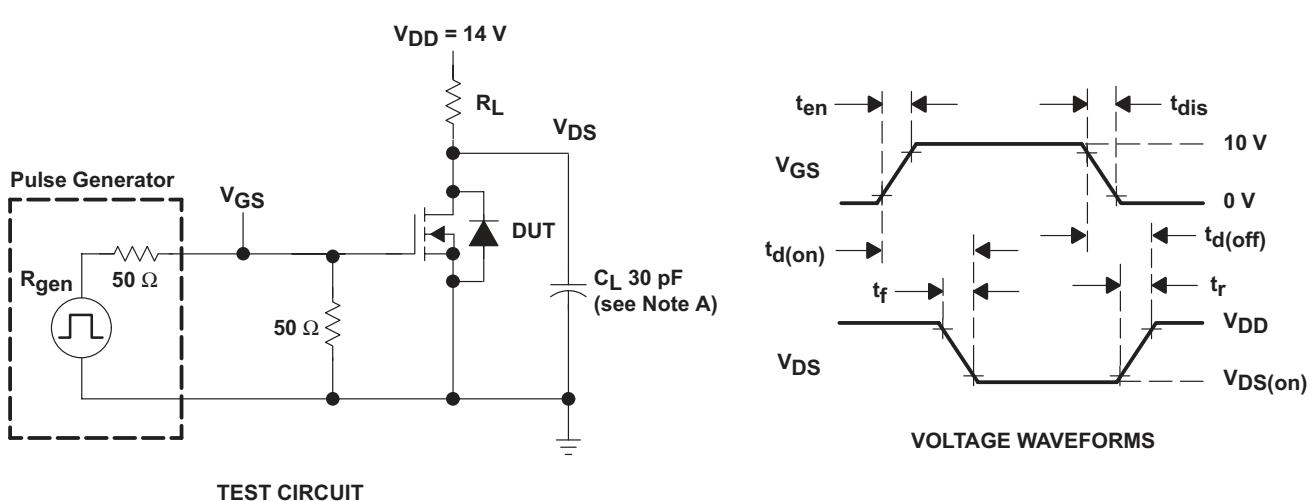


Figure 3. Resistive-Switching Test Circuit and Voltage Waveforms

TPIC1502

QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

PARAMETER MEASUREMENT INFORMATION

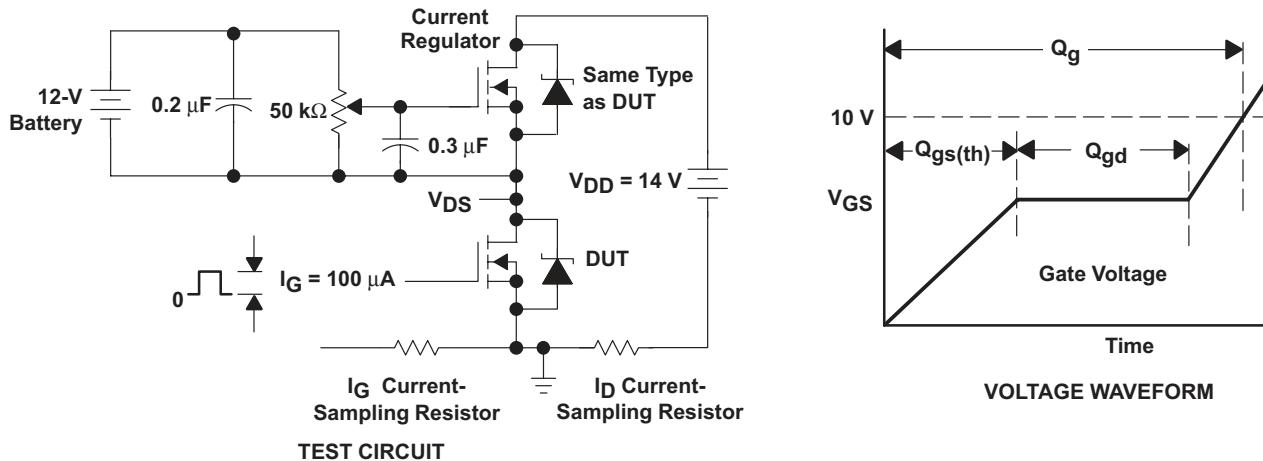


Figure 4. Gate-Charge Test Circuit and Voltage Waveform

TYPICAL CHARACTERISTICS

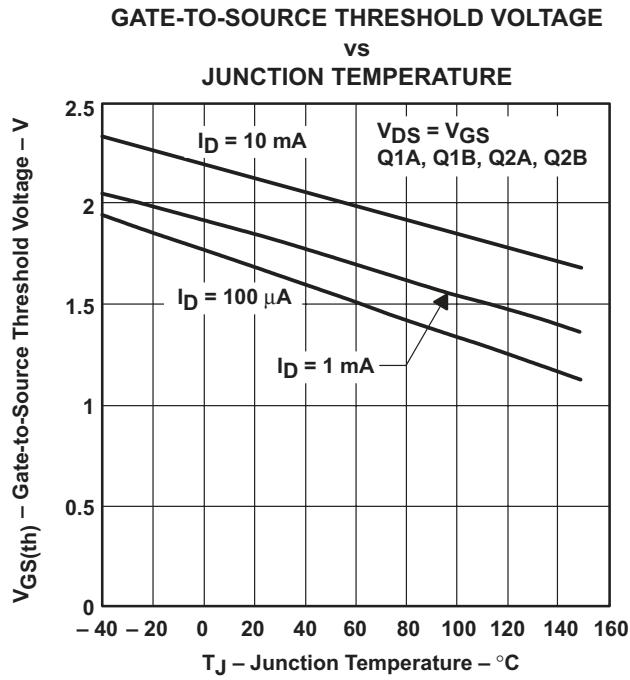


Figure 5

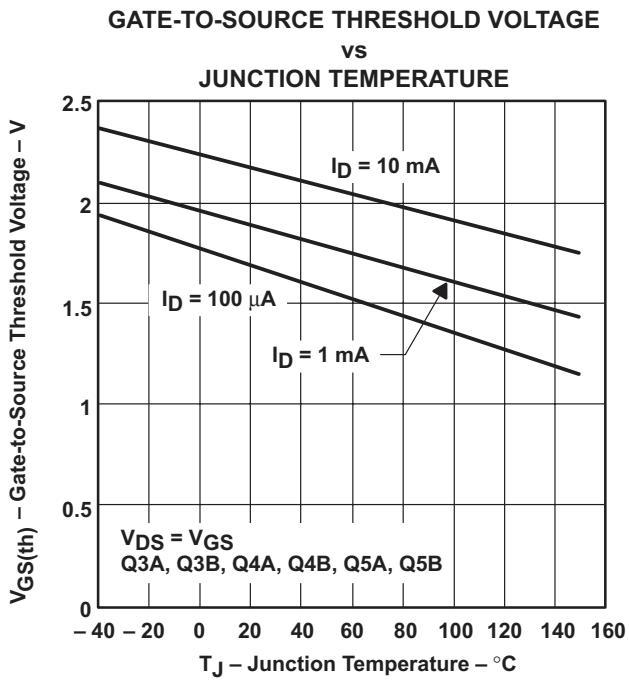


Figure 6

TYPICAL CHARACTERISTICS

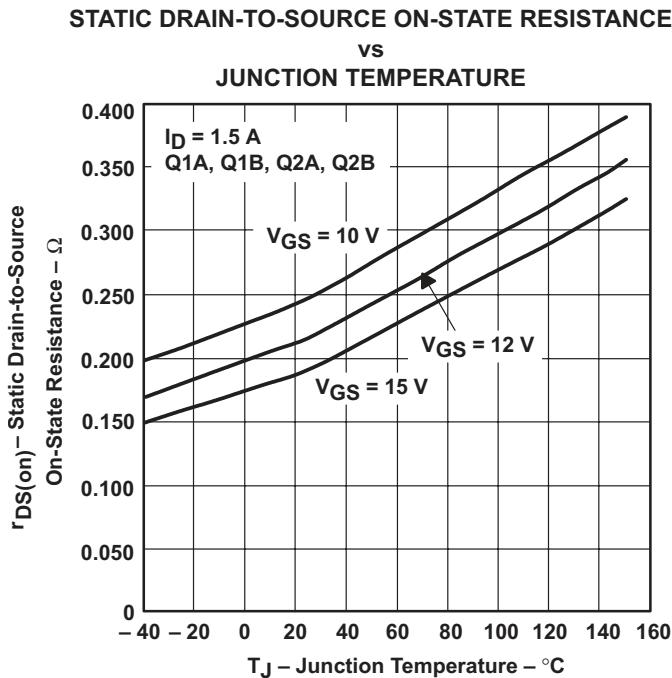


Figure 7

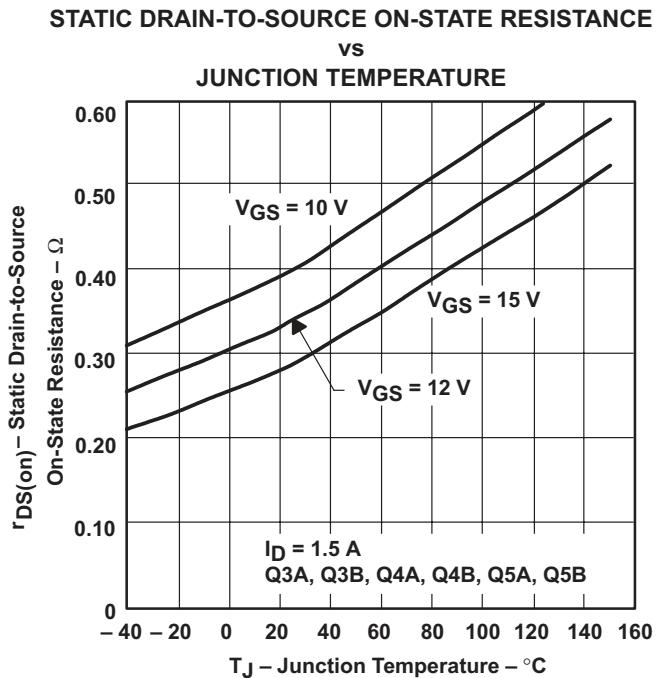


Figure 8

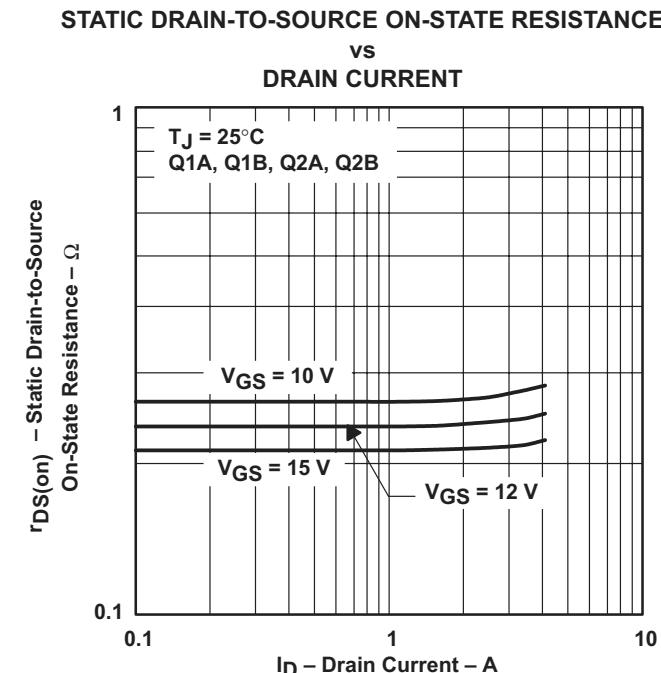


Figure 9

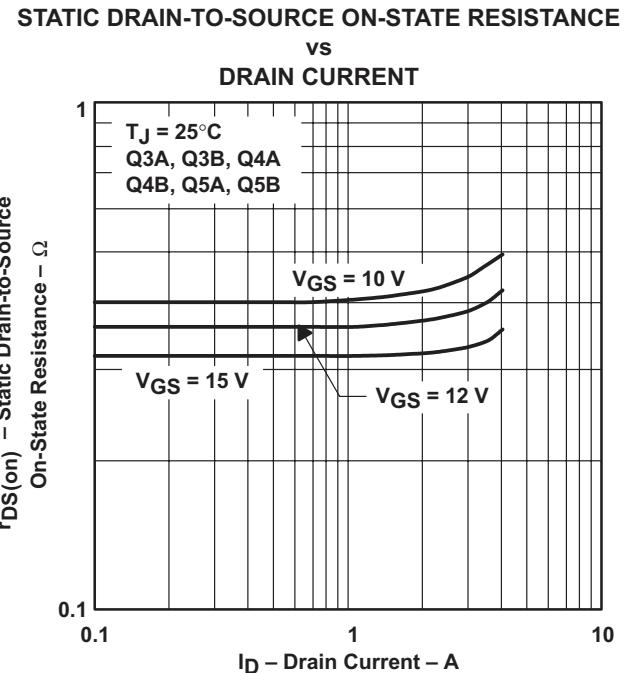


Figure 10

TPIC1502

QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

TYPICAL CHARACTERISTICS

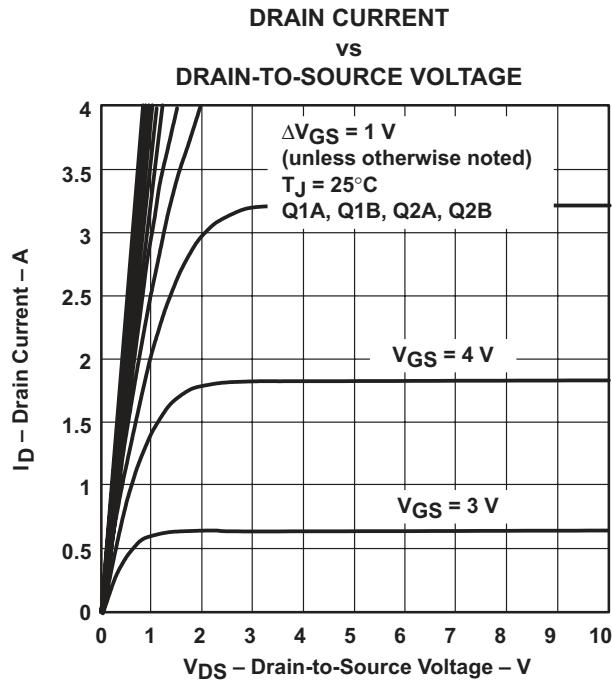


Figure 11

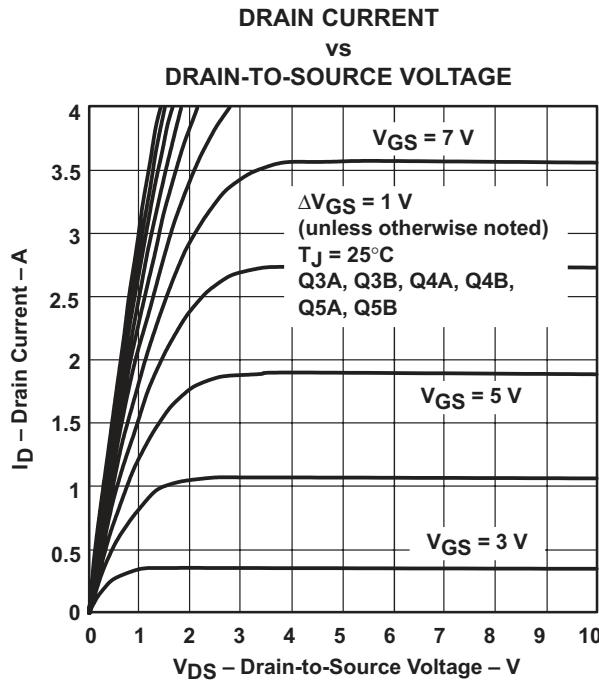


Figure 12

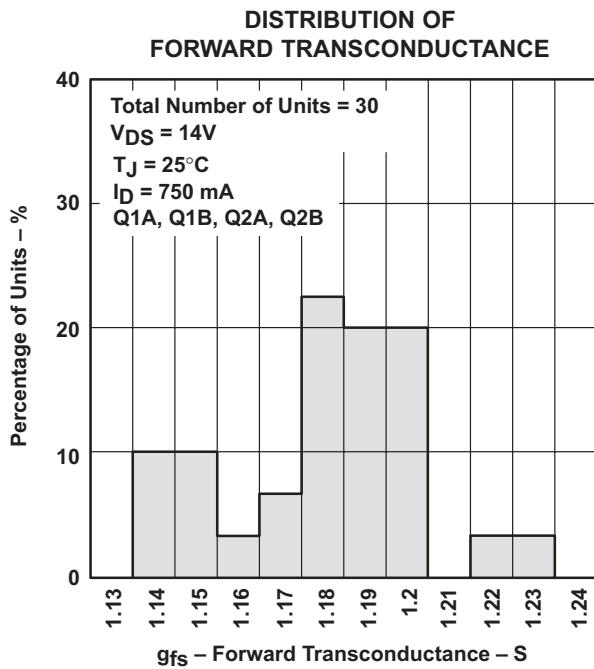


Figure 13

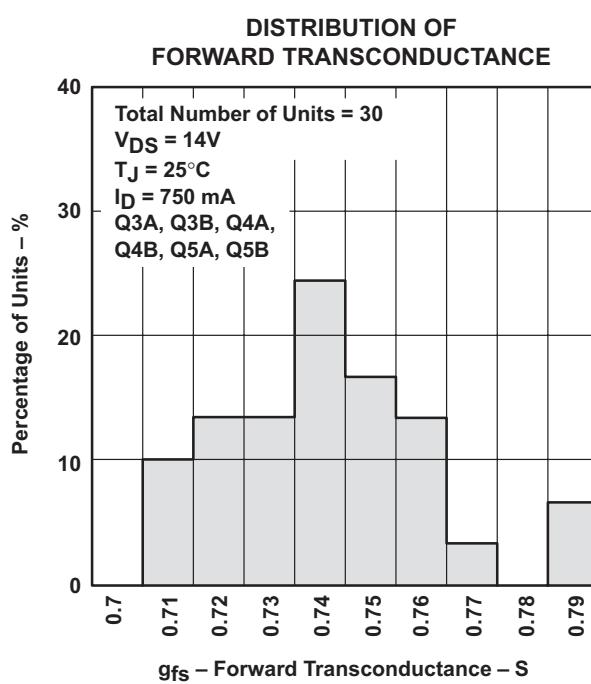


Figure 14

TYPICAL CHARACTERISTICS

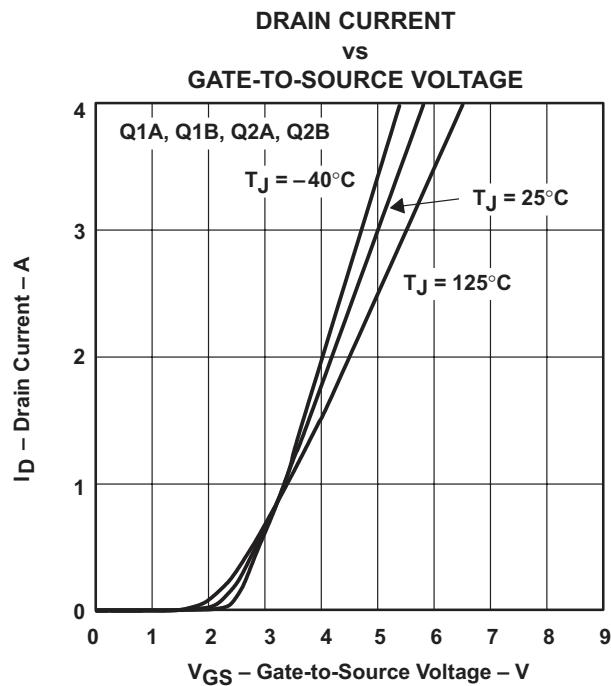


Figure 15

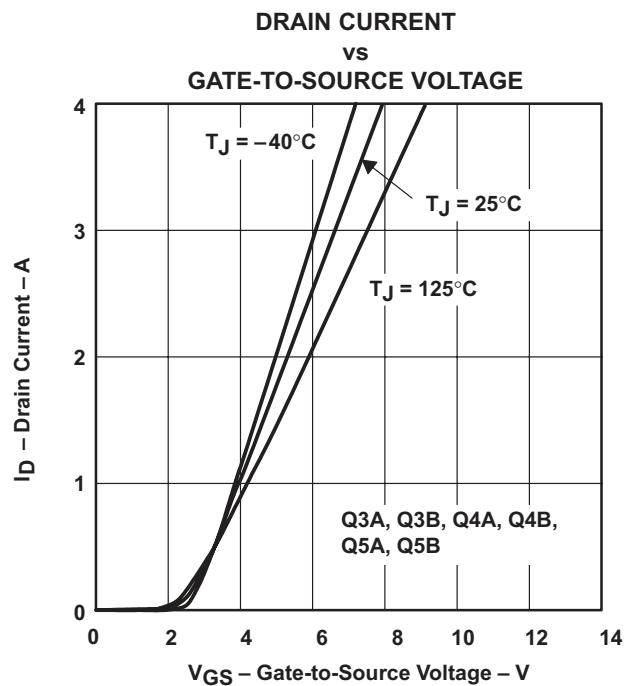


Figure 16

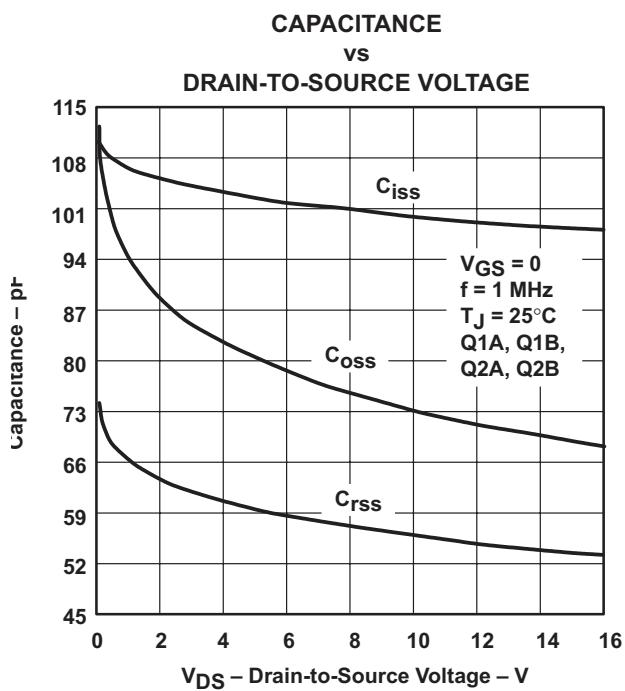


Figure 17

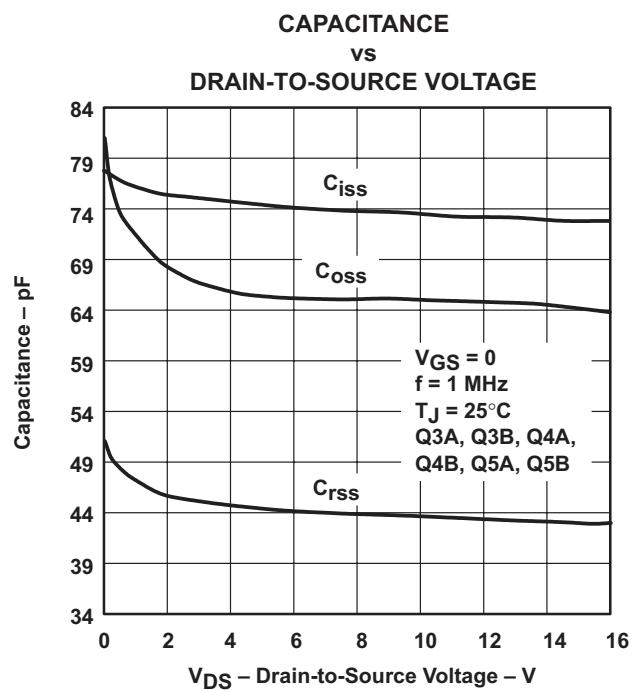


Figure 18

TPIC1502

QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

TYPICAL CHARACTERISTICS

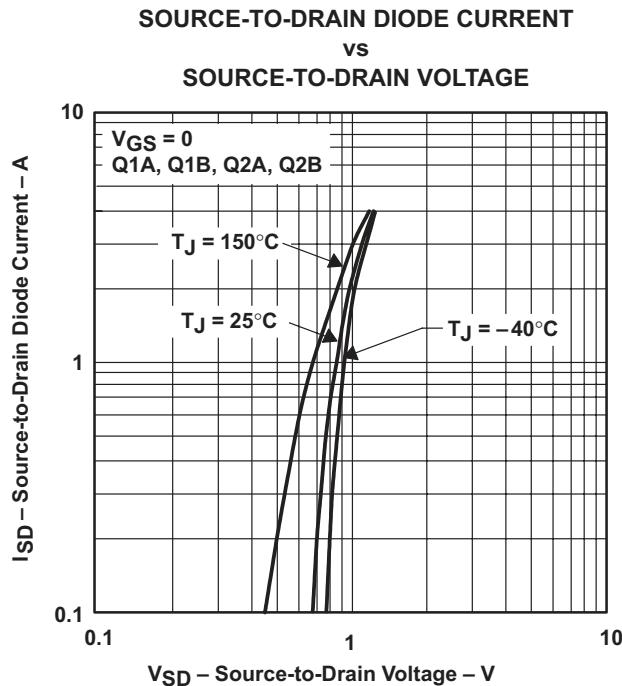


Figure 19

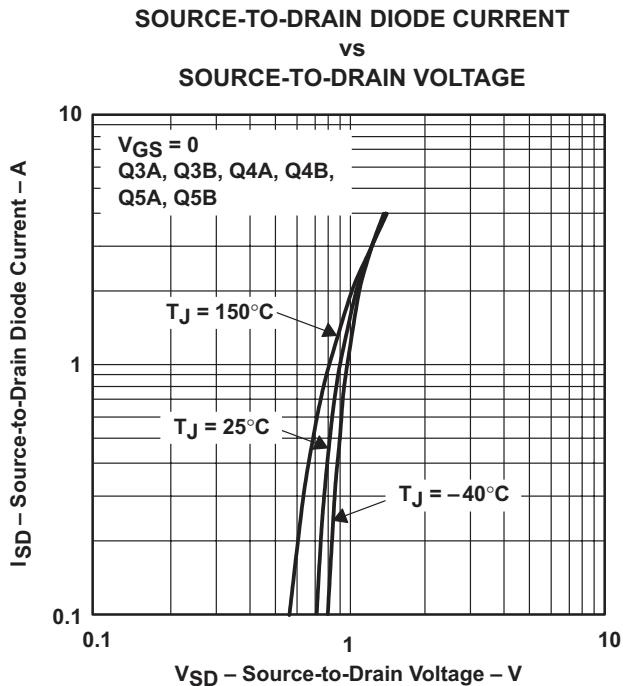


Figure 20

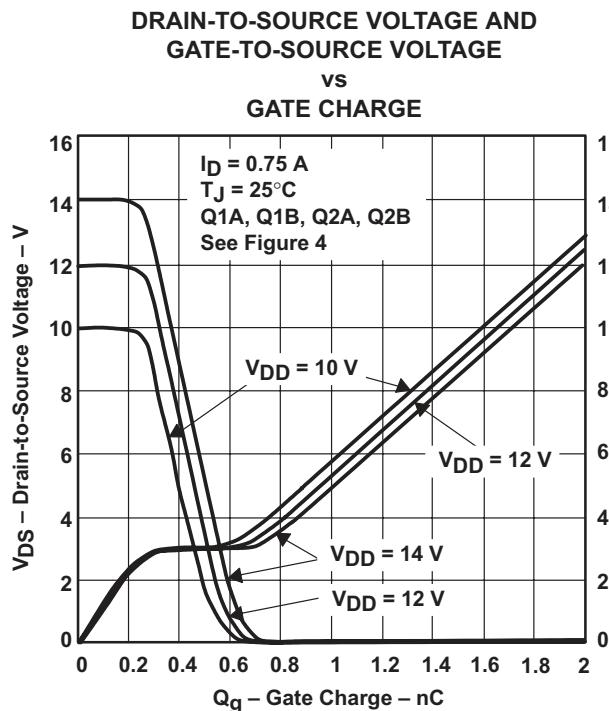


Figure 21

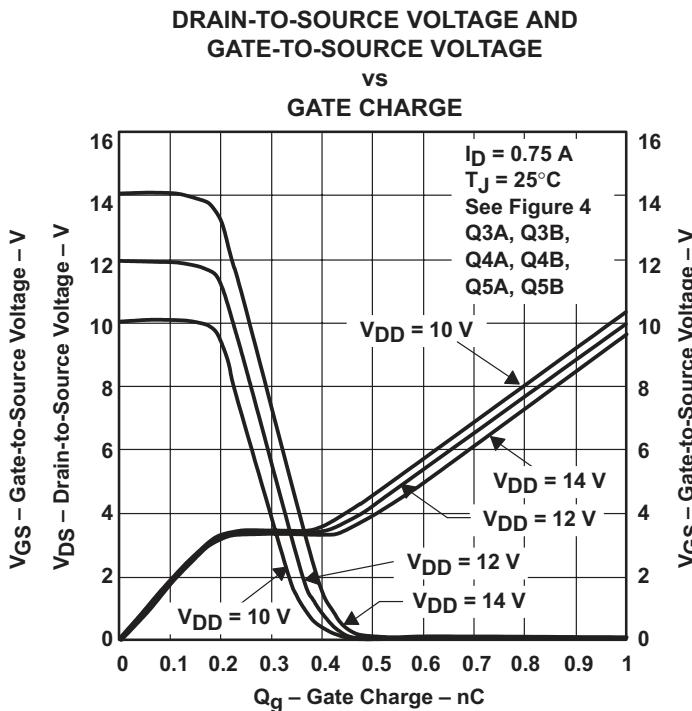


Figure 22

TYPICAL CHARACTERISTICS

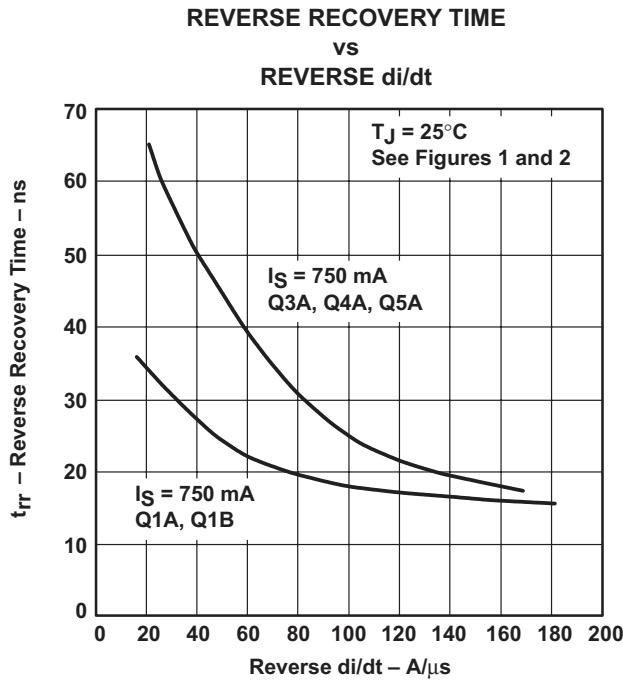


Figure 23

TPIC1502 QUAD AND HEX POWER DMOS ARRAY

SLIS054 – OCTOBER 1996

THERMAL INFORMATION

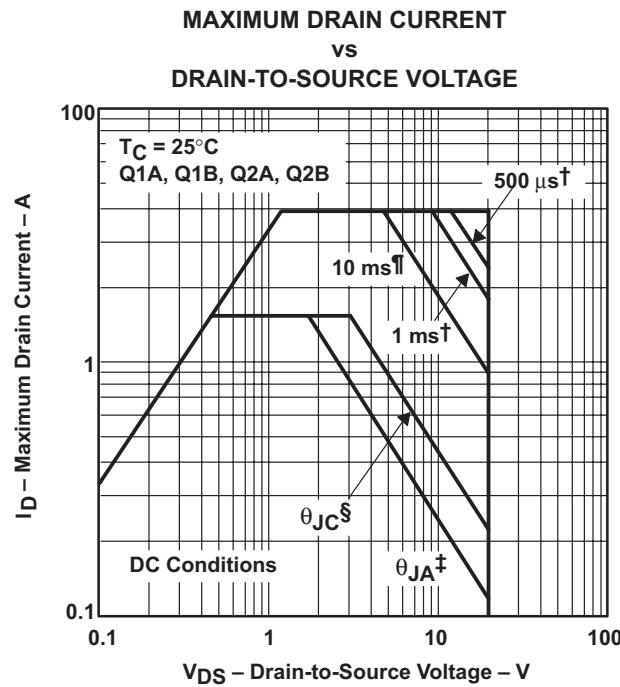


Figure 24

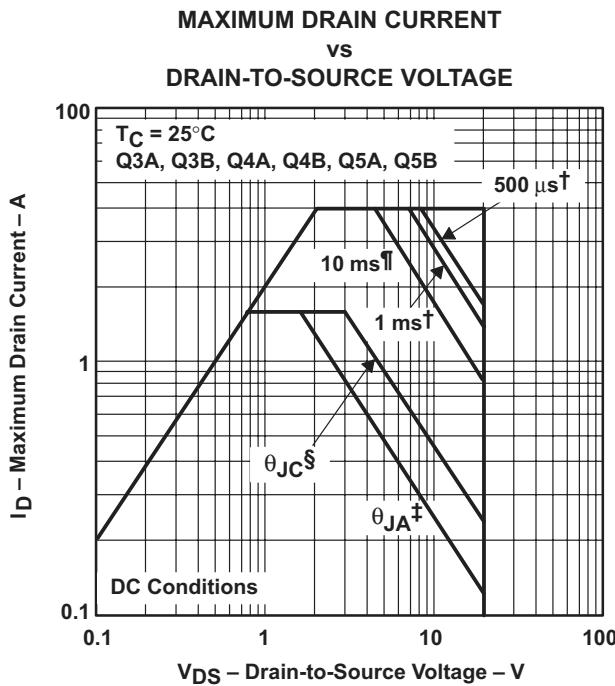


Figure 25

\dagger Less than 10% duty cycle


$\#$ Device is mounted on a 24 in², 4 layer FR4 printed-circuit board.

$\$$ Device is mounted in intimate contact with infinite heatsink.

\ddagger Less than 2% duty cycle

THERMAL INFORMATION

**DW PACKAGE†
JUNCTION-TO-BOARD THERMAL RESISTANCE
VS
PULSE DURATION**

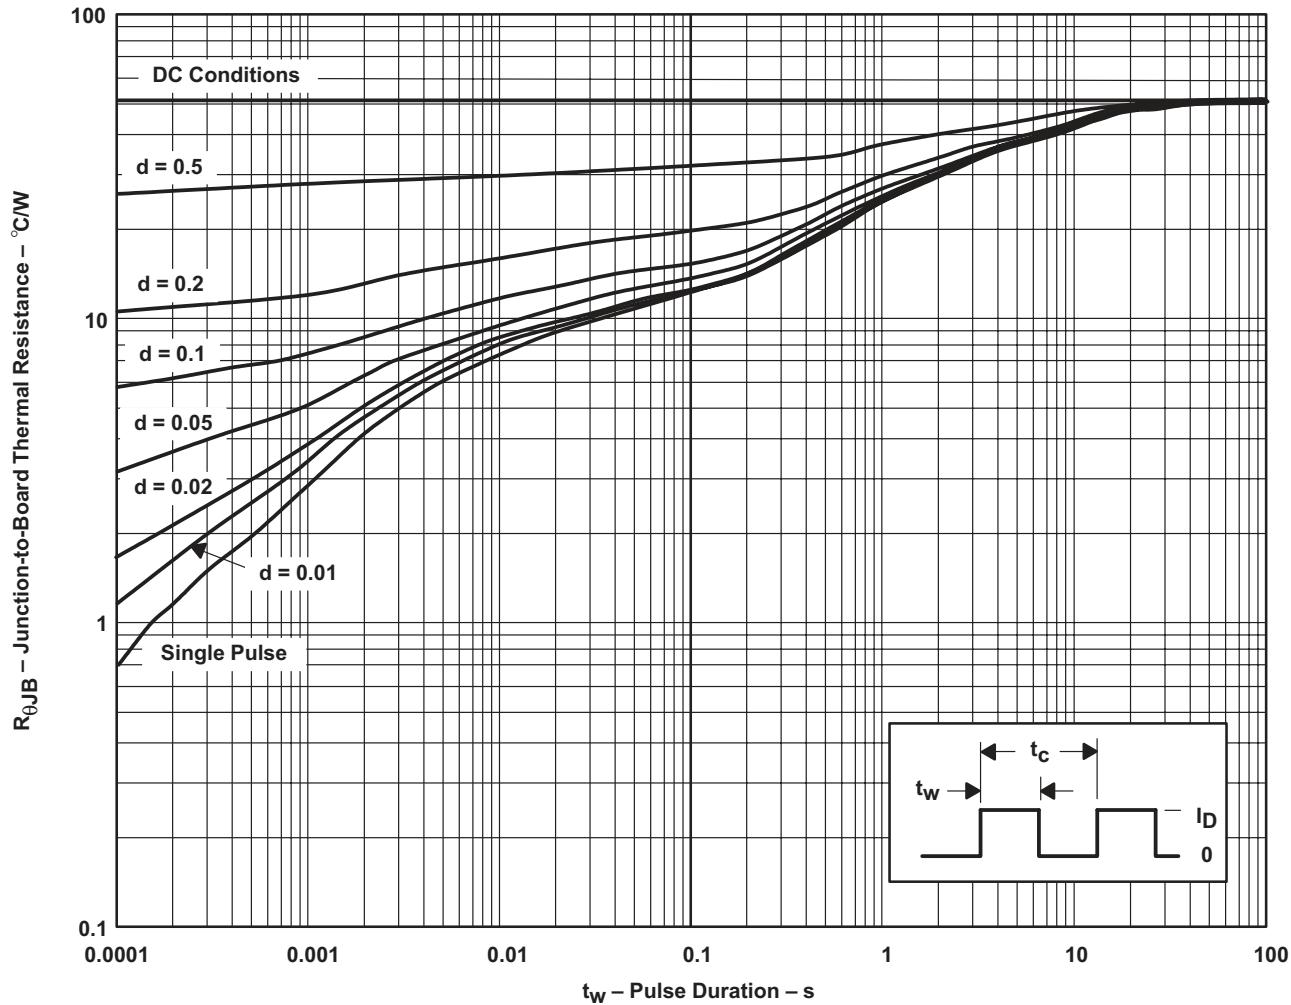

† Device is mounted on 24 in², 4-layer FR4 printed circuit board with no heat sink.

NOTE A: $Z_{\theta B}(t) = r(t) R_{\theta JB}$

t_W = pulse duration

t_C = cycle time

d = duty cycle = t_W/t_C

Figure 26

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.