


Order Number
203702-3700



Application Tooling Specification

FEATURES

- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry-standard mounting and 135.80mm (5.346”) shut height
- Quick setup time; plus, the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of 0.015mm (.0006”) for conductor crimp height and 0.063mm (.0025”) for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other
- This tool is IPC/WHMA-A-620 Class 2 Compliant
- Directly adapts to most automatic wire processing machines

SCOPE


Products: Micro-Fit Plus, 20-24 AWG Wire.

Terminal Series No.	Terminal Order No.	Wire Size AWG	Insulation Diameter				Strip Length	
			IPC/WHMA-A-620 (1)		Terminal (2)		mm	In.
			mm	In.	mm	In.		
206460	206460-0021 206460-0022* 206460-0023*	20-24	1.31-1.85	.052-.073	0.90-1.85	.035-.073	2.54-2.92	.100-.115
215953	215953-0021 215953-0022* 215953-0023*	20-24	1.31-1.85	.052-.073	0.90-1.85	.035-.073	2.54-2.92	.100-.115

(1) To achieve optimum IPC/WHMA-A-620 insulation crimps, use this insulation OD range.
 (2) Overall insulation OD specification for terminal.

*Terminal oiler 63801-7240 recommended when crimping gold-plated terminals.

DEFINITION OF TERMS

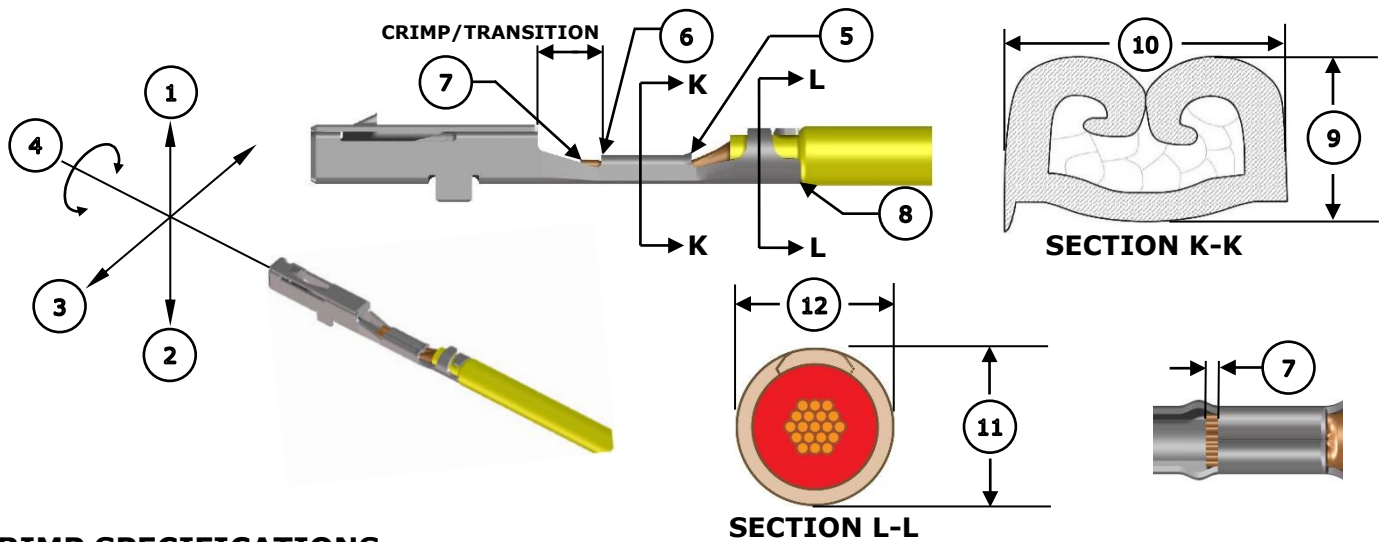

CRIMP SPECIFICATIONS

Feature	Requirement					
1. Bend Up	3° Max					
2. Bend Down	3° Max					
3. Twist	4° Max					
4. Roll	8° Max					
5. Bell Mouth Rear	0.05-0.35mm (.002-.014")					
6. Bell Mouth Front	Not Applicable					
7. Conductor Brush	0.80mm (.031")					
8. Cut-Off Tab	0.20mm (.008") Max					
Conductor Crimp	Terminal Order No.	Wire Size	9. Crimp Height		10. Crimp Width (Ref)	
	206460 215953	20 AWG	0.91-0.99mm	.036-.039 In.	1.40-1.50mm	.055-.059 In.
		22 AWG	0.84-0.91mm	.033-.036 In.	1.40-1.50mm	.055-.059 In.
		24 AWG	0.79-0.84mm	.031-.033 In.	1.40-1.50mm	.055-.059 In.
Insulation Crimp	Terminal Order No.	Wire Size	11. Crimp Height (Ref)		12. Crimp Width (Ref)	
	206460 215953	20 AWG	2.30mm	.090 In.	1.80-2.05mm	.071-.081 In.
		22 AWG	2.30mm	.090 In.	1.80-2.05mm	.071-.081 In.
		24 AWG	2.30mm	.090 In.	1.80-2.05mm	.071-.081 In.
Pull Force	Terminal Order No.	Wire Size	Minimum Pull Force		To be measured with no influence from the insulation crimp.	
	206460 215953	20 AWG	71.1 N	16.0 lb.		
		22 AWG	44.4 N	10.0 lb.		
		24 AWG	28.5 N	6.4 lb.		

Tool Qualification Notes

1. Pull force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.
3. Terminal Oiler (63801-7240) will improve tooling life and minimize crimp extrusions. See 63800-4900 FineAdjust manual.

NOTES

General Notes

1. Molex recommends that an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and applicator before crimping under power. Check that all screws are tight.
3. Slugs, terminals, dirt and oil should be kept clear of the work area.
4. Wear safety glasses at all times.
5. For recommended maintenance, refer to the FineAdjust manual.

WARNINGS

CAUTION: This applicator must be installed in a press with a standard shut height of 135.80mm (5.346"). Tooling damage could result at a lower setting.

CAUTION: To prevent injury, never operate this applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

CAUTION: Molex tooling crimp specifications are valid only when used with Molex terminals and tooling manufactured by Molex and sold by Molex or authorized distributors ("Molex Tooling"). When using tooling other than Molex Tooling with Molex-specific connector systems listed in our ATS documents, the Molex Tooling qualification does not apply, and the responsibility for full qualification of the connector system is that of the customer. Molex accepts no liability for connector performance or tooling support where tooling other than Molex Tooling is used or where Molex Tooling is modified.

PARTS LIST

FineAdjust Applicator 203702-3700				
Item	Order No.	Engineering No.	Description	Quantity
Perishable Tooling				
	203702-3770	203702-3770	Tool Kit (All "Y" Items)	Ref
1	63446-1902	63446-1902	Insulation Punch	1 Y
2	63444-1421	63444-1421	Conductor Punch	1 Y
3	63445-1905	63445-1905	Insulation Anvil	1 Y
4	63445-1451	63445-1451	Conductor Anvil	1 Y
5	63443-0005	63443-0005	Cut-Off Plunger	1 Y
6	63443-0012	63443-0012	Front Plunger Retainer	1 Y
Non-Perishable Components				
7	63443-0024	63443-0024	Key	1
8	01124-1067	4996-4	Cut-Off Plunger Spring	1
9	63443-0009	63443-0009	Front Scrap Chute	1
10	63443-0090	63443-0090	Wire Stop Assembly	1
11	200213-7552	200213-7552	Anvil Mount	1
12	63443-2806	63443-2806	Front Plunger Striker	1
13	63443-2905	63443-2905	Wire Hold Down Plunger	1
14	63600-0021	63600-0021	Wire Hold Down Spring	1
15	01118-4083	60707-8	Terminal Guide	1
16	63443-7137	63443-7137	Nose Hold Down	1
17	63443-0093	63443-0093	Nose Hold Down Shank	1
18	01117-0022	1736-21	Hold Down Spring	1
19	63443-6113	63443-6113	Rear Track Cover	1
Frame				
20	63800-4901	63800-4901	Top	1
21	63801-3281	63801-3281	Base	1
22	63801-4650	63801-4650	Track	1
Hardware				
23	—	—	M3 x 6 SHCS	2*
24	—	—	M3 x 6 FHCS	1*
25	—	—	M3 x 10 SHCS	1*
26	—	—	M4 x 6 SHCS	2*
27	—	—	M4 x 12 BHCS	2*
28	—	—	M4 x 50 SHCS	2*
29	—	—	M5 x 12 SHCS	1*
30	—	—	#10-32 x 3/8" Flat Point SSS	1*
31	—	—	#10-32 Hex Jam Nut	1*
*Fastener parts can be purchased through most industrial suppliers by using the description in the table above.				

ASSEMBLY DRAWING

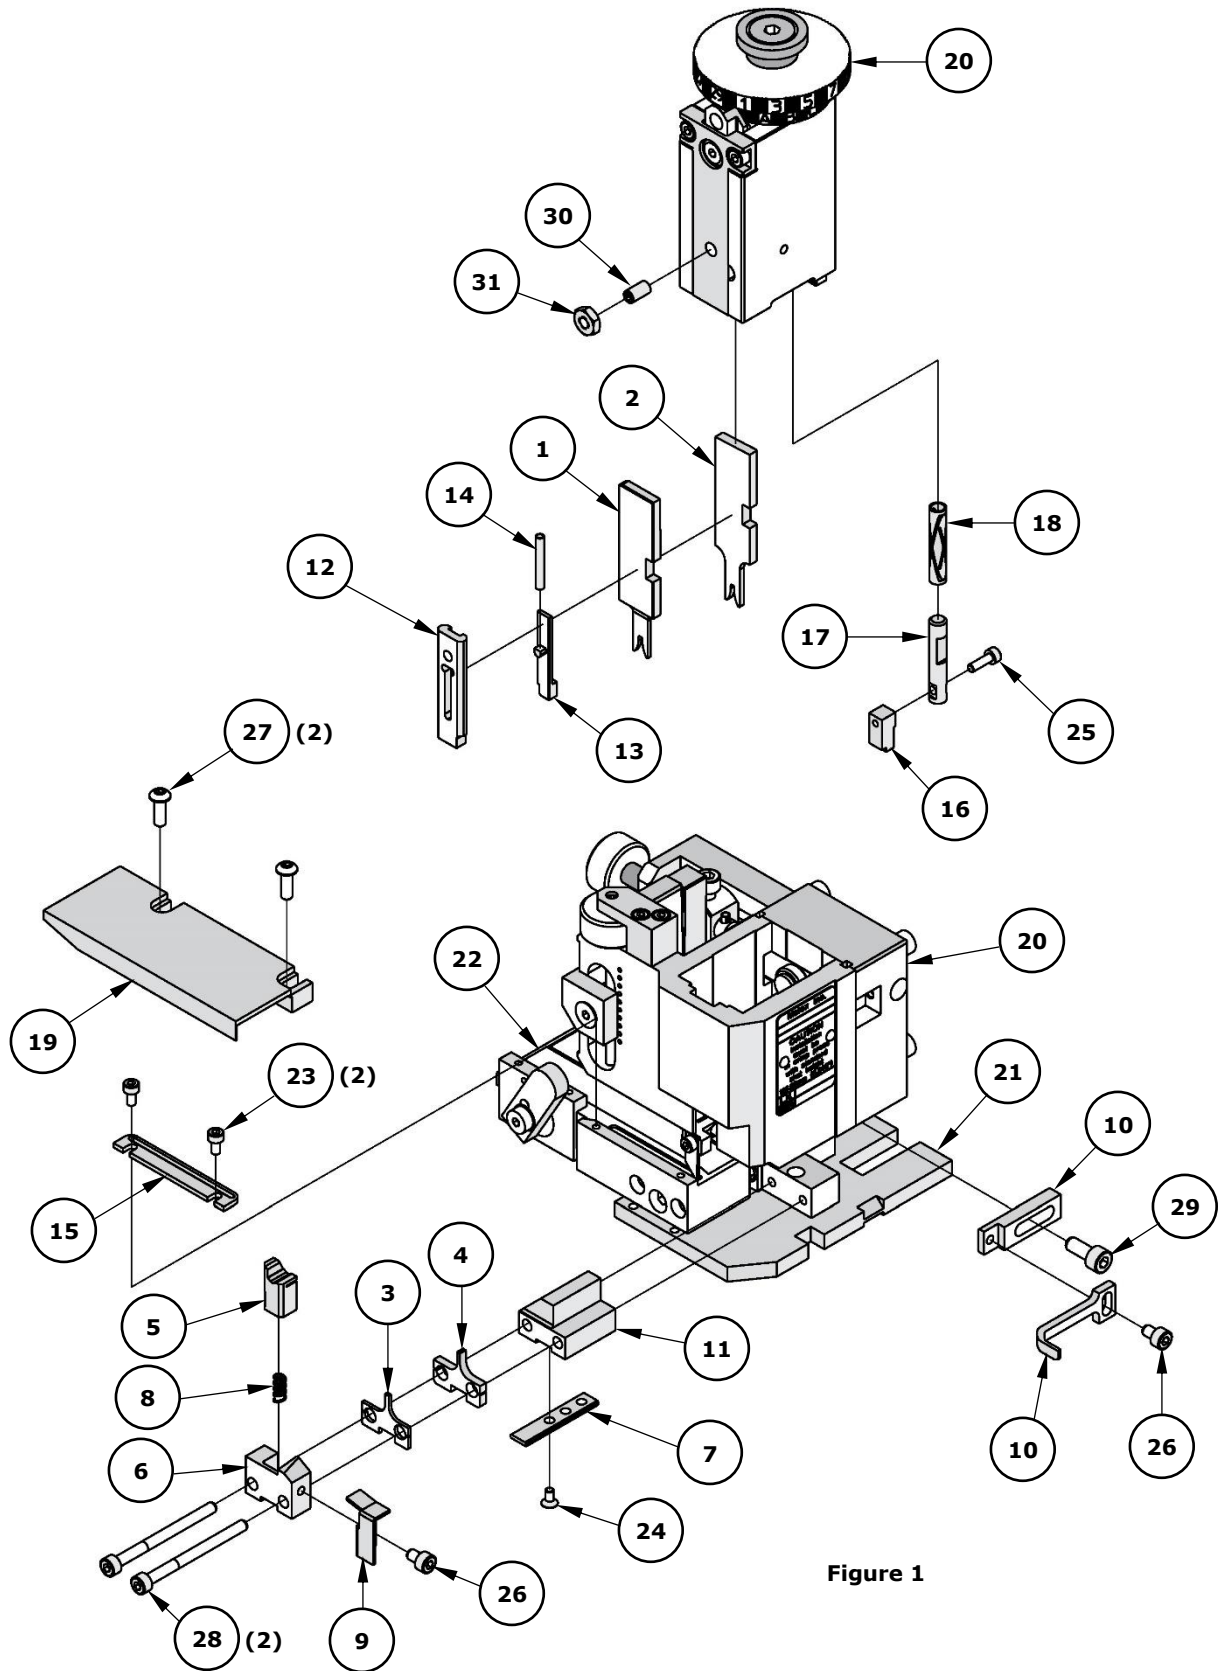


Figure 1

Application Tooling Support

Phone: (402) 458-TOOL (8665)

E-Mail: applicationtooling@molex.com

Website: www.molex.com/applicationtooling

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.