

G3G146-AB72-01

EC centrifugal fan

forward curved, single inlet
with housing (flange)



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
County court Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|---------|
| Type | G3G146-AB72-01 | |
| Motor | M3G074-CF | |
| Phase | | 1~ |
| Nominal voltage | VAC | 115 |
| Frequency | Hz | 50/60 |
| Type of data definition | | ml |
| State | | prelim. |
| Speed | min ⁻¹ | 2390 |
| Power input | W | 170 |
| Current draw | A | 2.1 |
| Min. back pressure | Pa | 0 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 60 |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



EC centrifugal fan

forward curved, single inlet

with housing (flange)

Technical features

| | |
|---|--|
| Mass | 3.5 kg |
| Size | 146 mm |
| Material of electronics housing | Die-cast aluminium |
| Material of impeller | Sheet steel, hot-galvanised |
| Housing material | Die-cast aluminium |
| Direction of rotation | Clockwise, seen on rotor |
| Type of protection | IP 44; Depending on installation and position as per EN 60034-5 |
| Insulation class | "B" |
| Humidity class | F3-1 |
| Max. permissible ambient motor temp. (transp./ storage) | + 80 °C |
| Min. permissible ambient motor temp. (transp./storage) | - 40 °C |
| Mounting position | Shaft horizontal or rotor on top; rotor on bottom on request |
| Condensate discharge holes | None |
| Operation mode | Continuous operation (S1) |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Output 10 VDC, max. 1.1 mA - Tach output - Motor current limit - Control input 0-10 VDC / PWM - Soft start - Over-temperature protected electronics / motor |
| EMC interference immunity | Acc. to EN 61000-6-2 |
| EMC interference emission | Acc. to EN 55022 (Class B) |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Cable exit | Variable |
| Protection class | I (if protective earth is connected by customer) |
| Product conforming to standard | EN 60335-1 |
| Approval | UL 2111; CSA C22.2 Nr.77 |




G3G146-AB72-01

EC centrifugal fan

forward curved, single inlet
with housing (flange)

Product drawing

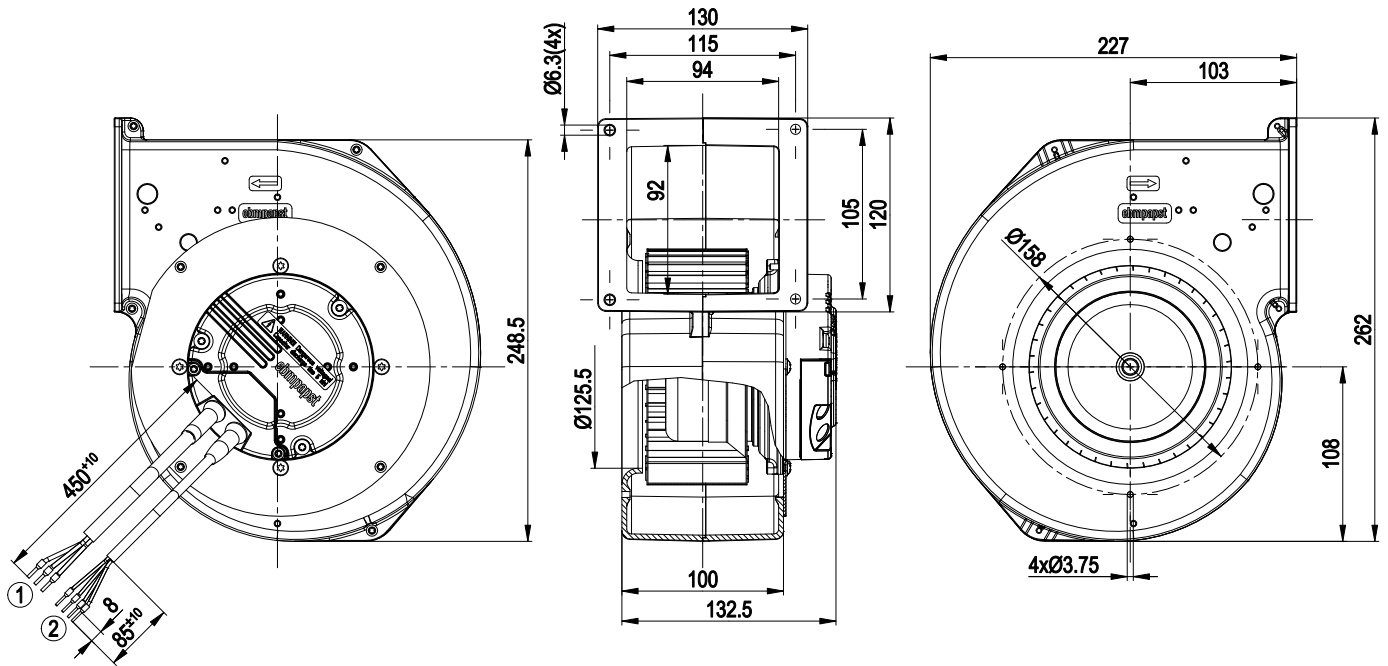


- | | |
|---|---|
| 1 | Connection line AWG18, 3 x crimped core-end sleeves |
| 2 | Control line AWG22, 4 x crimped core-end sleeves |



EC centrifugal fan

forward curved, single inlet
with housing (flange)

Connection screen

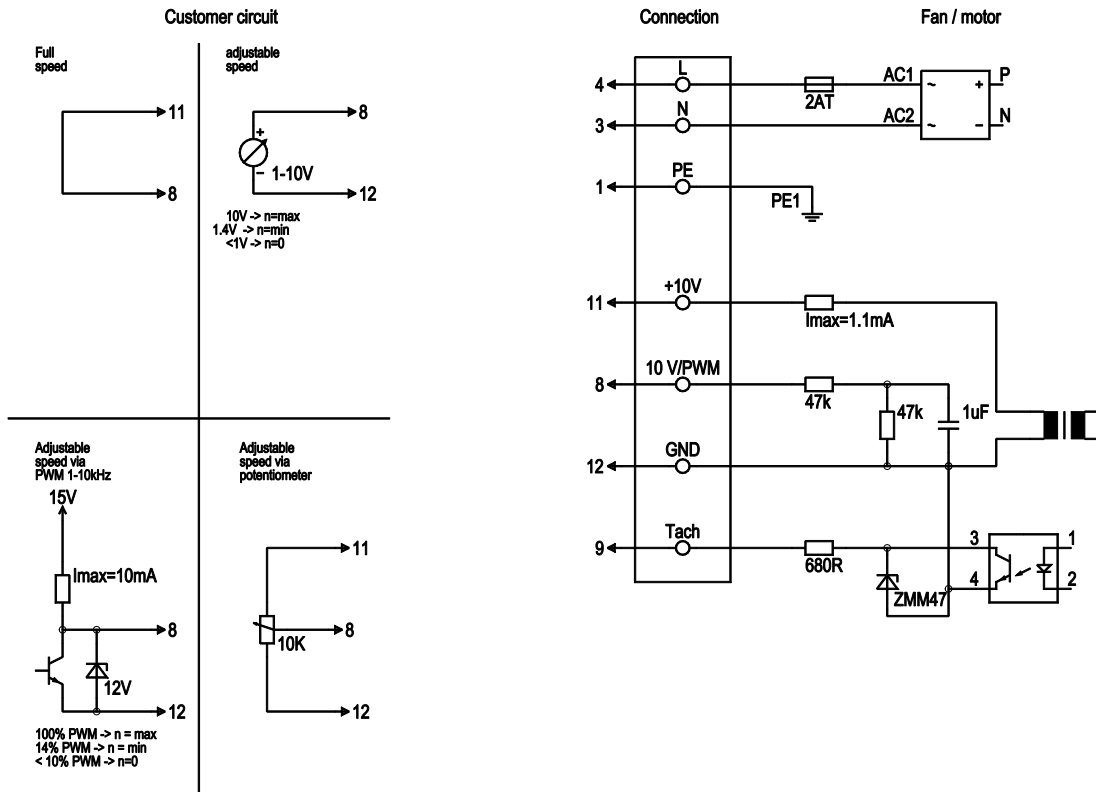

| Line | No. | Signal | Colour | Function / assignment |
|------|-----|------------------|--------------|--|
| | 4 | L | black | Power supply 230 VAC, 50-60 Hz, see type plate for voltage range |
| | 3 | N | blue | Neutral conductor |
| | 1 | PE | green/yellow | Protective earth |
| | 8 | 0-10 V PWM | yellow | Control input 0 - 10 V or PWM, electrically isolated |
| | 9 | Tach | white | Tach output: open collector, 1 pulse per revolution, electrically isolated |
| | 11 | 10V / max 1.1 mA | red | Voltage output 10 V / max. 1.1 mA, electrically isolated |
| | 12 | GND | blue | GND - Connection for control interface |




EC centrifugal fan

forward curved, single inlet

with housing (flange)

Charts: Air flow 50 Hz

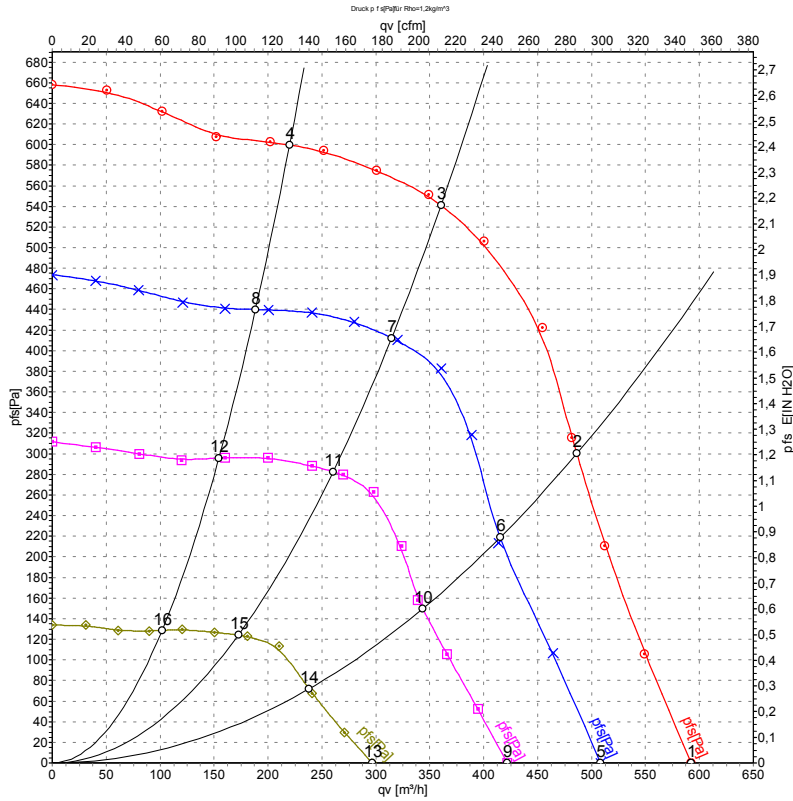

Measurement: LU-119429
 Measurement: LU-75520
 Measurement: LU-75521
 Measurement: LU-75522

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _{ed} | I | qv | P _{fs} |
|----|-----|----|-------------------|-----------------|------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa |
| 1 | 115 | 50 | 2390 | 170 | 2.10 | 590 | 0 |
| 2 | 115 | 50 | 2805 | 170 | 2.10 | 485 | 300 |
| 3 | 115 | 50 | 3090 | 143 | 1.84 | 360 | 540 |
| 4 | 115 | 50 | 3275 | 110 | 1.44 | 220 | 600 |
| 5 | 115 | 50 | 2115 | 110 | 1.44 | 510 | 0 |
| 6 | 115 | 50 | 2470 | 111 | 1.46 | 415 | 211 |
| 7 | 115 | 50 | 2735 | 97 | 1.29 | 315 | 413 |
| 8 | 115 | 50 | 2825 | 71 | 0.97 | 190 | 440 |
| 9 | 115 | 50 | 1770 | 66 | 0.91 | 420 | 0 |
| 10 | 115 | 50 | 2060 | 66 | 0.91 | 345 | 148 |
| 11 | 115 | 50 | 2285 | 60 | 0.83 | 260 | 283 |
| 12 | 115 | 50 | 2335 | 44 | 0.63 | 155 | 296 |
| 13 | 115 | 50 | 1245 | 26 | 0.40 | 295 | 0 |
| 14 | 115 | 50 | 1435 | 26 | 0.40 | 240 | 71 |
| 15 | 115 | 50 | 1525 | 22 | 0.34 | 175 | 124 |
| 16 | 115 | 50 | 1570 | 18 | 0.29 | 100 | 128 |

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

