



75 Ω BNC TO 12 GHz

BNC Cable Assemblies

RFC6T, RFA6T, RFB6T, RF179



| SERIES | END 1 CONNECTOR | END 2 CONNECTOR | OVERALL LENGTH |
|--|--|--|--|
| RFC6T* = 12G-SDI, Belden 4694R Cable | -74SP3 = 75 Ω BNC Straight Plug | -74SP3 = 75 Ω BNC Straight Plug | -“XXXX” = Overall Length in millimeters -0300 (300 mm) 11.81" minimum (RFA6T, RFB6T, RFC6T) -0100 (100 mm) 3.94" minimum (RF179) |
| RFA6T = RG 6 Cable | -D4SP3 = 75 Ω BNC Die Cast Straight Plug (RFA6T, RFB6T, RF179 only) | -D4SP3 = 75 Ω BNC Die Cast Straight Plug (RFA6T, RFB6T, RF179 only) | |
| RFB6T = Belden 1694A Cable | -74BJ3 = 75 Ω BNC Bulkhead Jack (RF179 only) | -74BJ3 = 75 Ω BNC Bulkhead Jack (RF179 only) | |
| RF179 = RG 179 Cable | -74RP3 = 75 Ω BNC Right-angle Plug (RFA6T, RFB6T, RFC6T only) | -74RP3 = 75 Ω BNC Right-angle Plug (RFA6T, RFB6T, RFC6T only) | |

ALSO AVAILABLE

75 Ω: DIN 1.0/2.3, HD-BNC™ = RFA6T, RFB6T, RFC6T

75 Ω: DIN 1.0/2.3, SMB, MCX, MMCX = RF179

*Designed to meet SMPTE 2082 12G-SDI specifications.

BNC Cable Connectors

BNC7T-CA




Supplied with pins, washers, nuts, gaskets and ferrules. See website for dimensions.

| CONNECTORS FOR INDUSTRY STANDARD CABLES | |
|---|----------------------------------|
| BNC7T-P-C-GN-ST-CA3 | Machined, RG 179 Cable |
| BNC7T-P-C-GN-RA-CA3 | Machined, RG 179 Cable |
| BNC7T-P-C-GN-ST-CA6 | *Machined, RG 6 Cable |
| BNC7T-P-C-GN-RA-CA6 | *Machined, RG 6 Cable |
| BNC7T-P-C-GN-ST-CA6B | Belden 4694R Cable |
| BNC7T-P-C-GN-RA-CA6B | Belden 4694R Cable |
| BNC7T-J-C-GN-ST-BH3 | Machined, Bulkhead, RG 179 Cable |
| BNC7T-P-C-GN-ST-CA3D | Die Cast, RG 179 Cable |
| BNC7T-P-C-GN-ST-CA6D | Die Cast, RG 179 Cable |

P-C = Cable Plug
J-C = Cable Jack
GN = Plating (10 μ" Gold on contact, Nickel on outer contact and shell)
ST = Straight
RA = Right-angle

*Designed to meet SMPTE 2082 12G-SDI specifications.

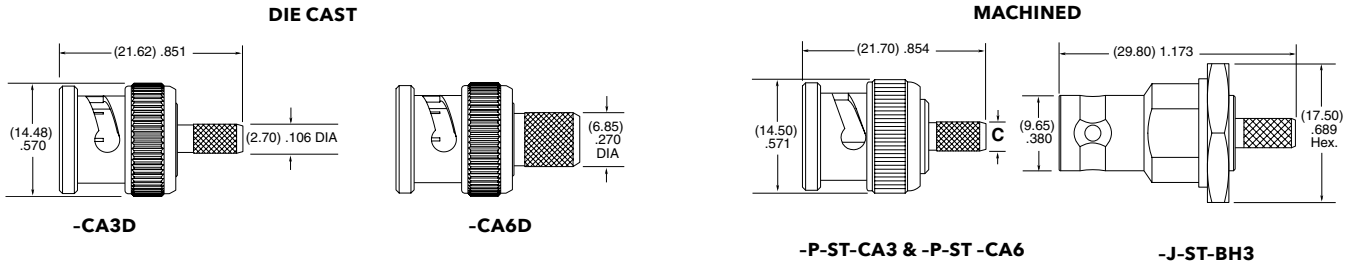

Note:
Additional plating options available on Cable Assemblies, Cable Connectors and Board Connectors. Contact RFGroup@samtec.com

| TERMINATION | C (DIA) |
|-------------|-------------|
| -CA3 | (2.70) .106 |
| -CA6 | (6.85) .207 |

75 Ω DIE CAST BNC TO 12 GHz

BNC Board Connectors
 BNC7T-TH, BNC7T-BH,
 BNC7T-BM, BNC7T-EM

Cable Mates:
 RF179, RFA6T, RFB6T,
 RFC6T, GRF7H-C



Notes:
 Contact RFGroup@samtec.com
 for 12G-SDI PCB mount launch
 characteristics.

Designed to meet SMPTE 2082
 12G-SDI specifications.

Additional plating options
 available on Board Connectors.
 Contact RFGroup@samtec.com

| BNC7T | GENDER | TYPE | PLATING | ORIENTATION | TERMINATION |
|--|---------------------|--------------------------|--|--|---|
| | -J = Jack | -P = PCB Mount | -GN = 10 μ" (0.25 μm) Gold contact, 100 μ" (2.54 μm) Nickel Shell | -ST = Straight -RA = Right-angle Bulkhead/Panel Mount | -TH2D = Tall Through-hole Die Cast (-ST only) -BH2D* = Low-Profile Die Cast Bulkhead Through-hole (-RA only) -BM1D* = Low-Profile Die Cast Bulkhead Mixed Technology for (1.60 mm) .062" PCB (-RA only) -BM2D* = Low-Profile Die Cast Bulkhead Mixed Technology for (3.18 mm) .125" PCB (-RA only) -EM1D* = Edge Mount Die Cast Bulkhead/Panel Mount for (1.60 mm) .062" PCB (-ST only) -EM2D* = Edge Mount Die Cast Bulkhead/Panel Mount for (2.40 mm) .093" PCB (-ST only) |
| | | | | | |
| -RA-BM1D (BALANCED FOR PICK-AND-PLACE) | | | | | |
| | | | | | |
| -RA-BH2D | | | | | |

*Lock washers & knurled nuts supplied with bulkhead/panel mount options

75 Ω MACHINED BNC TO 12 GHz

BNC Board Connectors
 BNC7T-TH, BNC7T-BH,
 BNC7T-EM

Cable Mates:
 RF179, RFA6T, RFB6T,
 RFC6T, GRF7H-C



Notes:
 Contact RFGroup@samtec.com
 for 12G-SDI PCB mount launch
 characteristics.

Designed to meet SMPTE 2082
 12G-SDI specifications.

Additional plating options
 available on Board Connectors.
 Contact RFGroup@samtec.com

| BNC7T | GENDER | TYPE | PLATING | ORIENTATION | TERMINATION |
|------------------------------|---------------------|--------------------------|--|--|--|
| | -J = Jack | -P = PCB Mount | -GN = 10 μ" (0.25 μm) Gold contact, 100 μ" (2.54 μm) Nickel Shell | -ST = Straight -RA = Right-angle Bulkhead/Panel Mount | -TH1 = Standard Through-hole (-ST only) -BH1* = Standard Bulkhead Through-hole (-RA only) -EM1* = Edge Mount Bulkhead/Panel Mount for (1.60 mm) .062" PCB (-ST only) -EM2* = Edge Mount Bulkhead/Panel Mount for (2.40 mm) .093" PCB (-ST only) |
| | | | | | |
| | | | | | |
| | | | | | |
| -ST-EM1 & -ST-EM2 | | | | | |
| | | | | | |
| -RA-BH1 | | | | | |

*Lock washers & knurled nuts supplied with bulkhead/panel mount options