

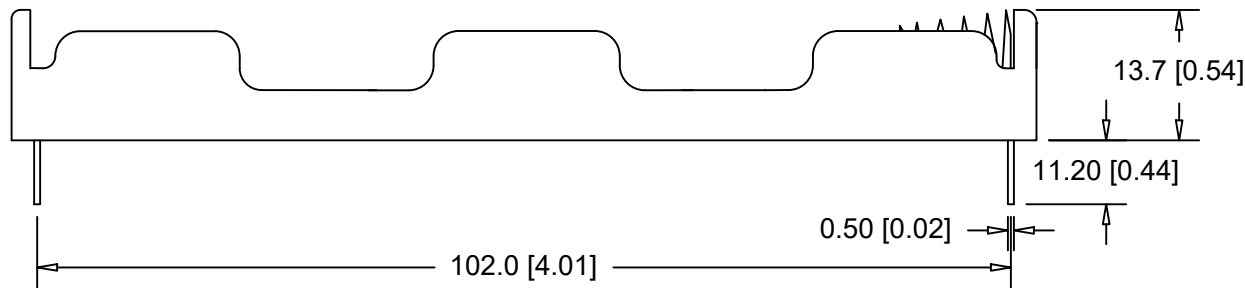



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/30/15	E	DIM. 102.0 WAS 104.0 DIM. 16.2 WAS 16.0	T.B.	B.S.	
04/21/17	F	DIM. 107.8 WAS 108.0 DIM. 49.7 WAS 50.2	T.B.	B.S.	
03/07/19	G	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

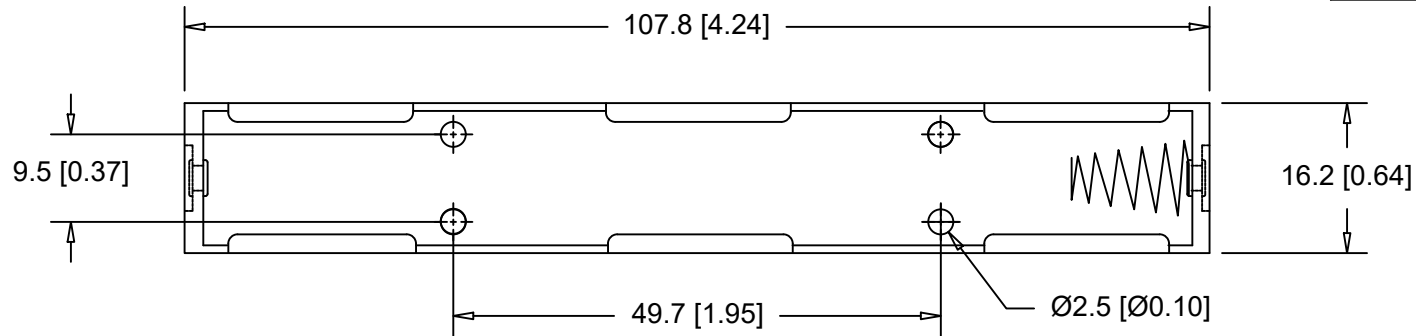

**SPECIFICATIONS:**

Plastic material - polypropylene, PP-1040  
 Flammability rating-UL94 HB, UL file no. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - nickel plated steel spring  
 Rivets - Brass, nickel plated  
 P.C. Pins - Steel, nickel plated  
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS COMPLAINT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title TWO "AA" CELL HOLDER WITH PC PINS		
Fractional ± .8 (.030)	Date 03/07/19	Drawing Number BC12AAPC	
Angular ± 3°			