

LEILA-Y-M

~25° medium beam. 14.8 mm high assembly with holder, installation tape and pins.

SPECIFICATION:

Dimensions	Ø 21.6 mm
Height	14.8 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
LEILA-Y-M	Single lens	PMMA	clear	
LEILA-Y-HLD	Holder	PC	black	gloss
LEILA-Y-TAPE	Tape	Acrylic foam		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA18091_LEILA-Y-M » Box size: 476 x 273 x 197 mm	1800	180	180	6.7



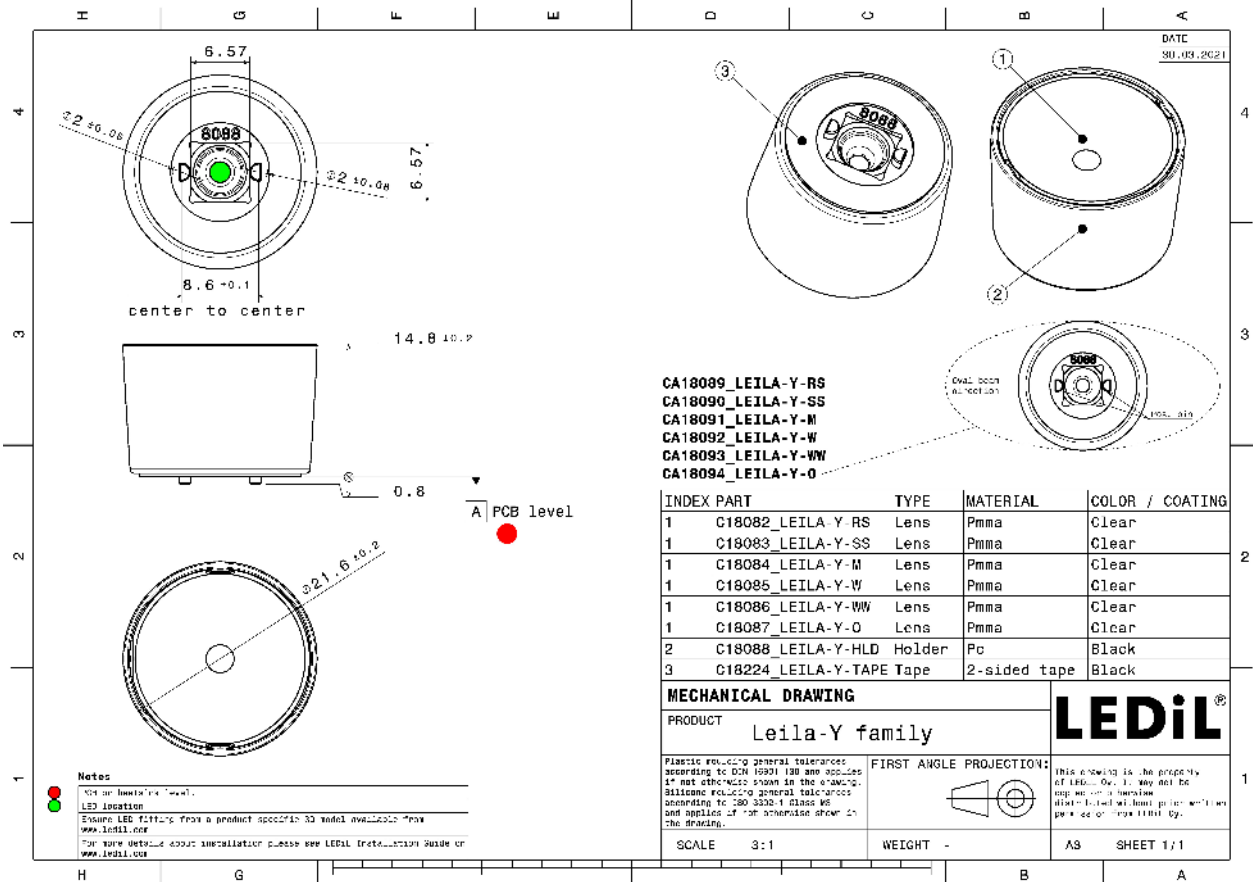


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):


CREE LED

LED XHP35 HI
 FWHM / FWTM 22.0° / 37.0°
 Efficiency 83 %
 Peak intensity 5.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

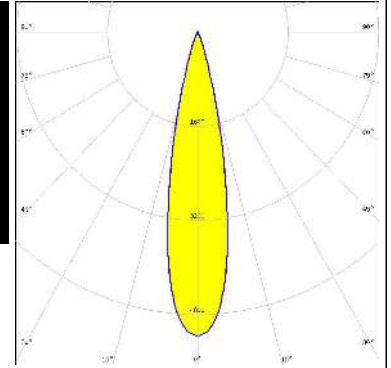


CREE LED

LED XP-G3
 FWHM / FWTM 23.0° / 39.0°
 Efficiency 78 %
 Peak intensity 4.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

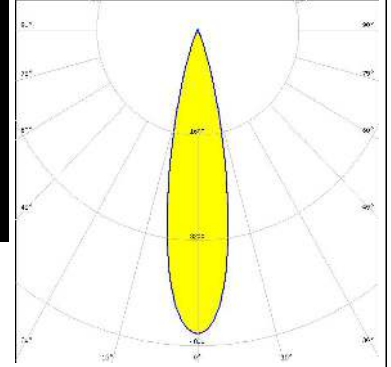


LUMILEDS

LED LUXEON 5050 Round LES
 FWHM / FWTM 28.0° / 48.0°
 Efficiency 77 %
 Peak intensity 2.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

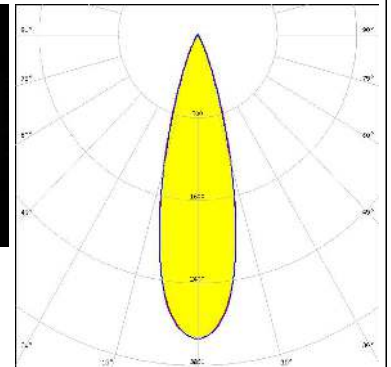

NICHIA


LED NVSW719AC
 FWHM / FWTM 21.0° / 35.0°
 Efficiency 85 %
 Peak intensity 6.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

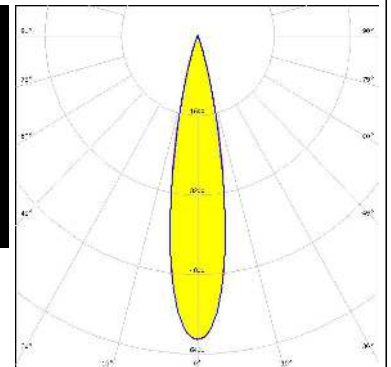

OPTICAL RESULTS (SIMULATED):


CREE LED

LED XM-L RGBW (XMLDCL HD)
 FWHM / FWTM 32.0° / 48.0°
 Efficiency 89 %
 Peak intensity 3 cd/lm
 LEDs/each optic 1
 Light colour RGBW
 Required components:

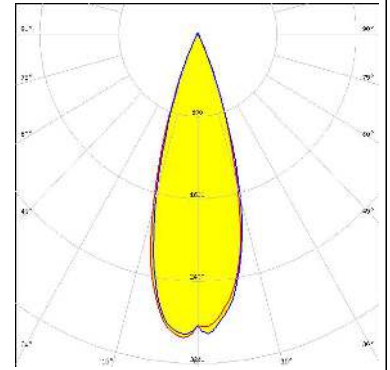


CREE LED

LED XM-L RGBW (XMLDCL HI)
 FWHM / FWTM 23.0° / 40.0°
 Efficiency 87 %
 Peak intensity 4.8 cd/lm
 LEDs/each optic 1
 Light colour RGBW
 Required components:

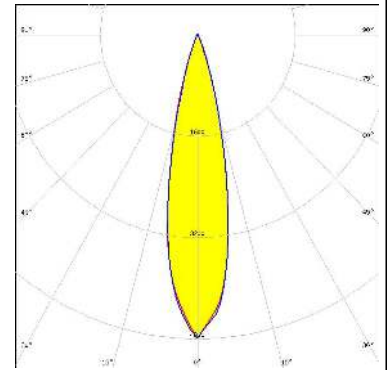


CREE LED

LED XM-L3
 FWHM / FWTM 28.0° / 44.0°
 Efficiency 83 %
 Peak intensity 3.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:





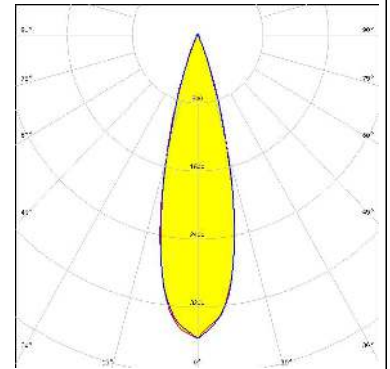


LUMILEDS


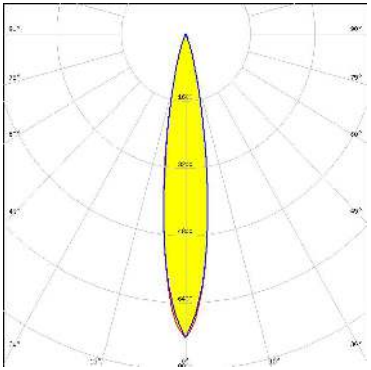

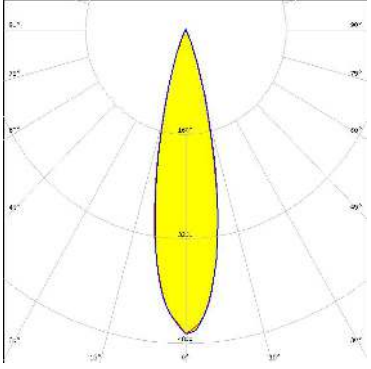

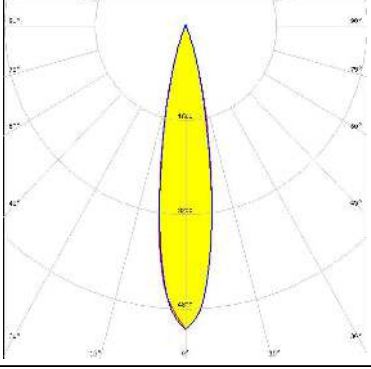


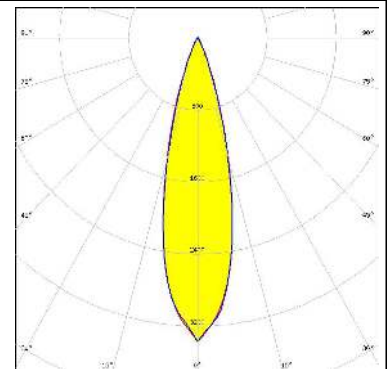
LED LUXEON 5050 Square LES
 FWHM / FWTM 26.0° / 46.0°
 Efficiency 80 %
 Peak intensity 3.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

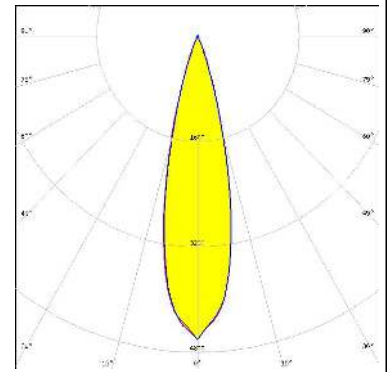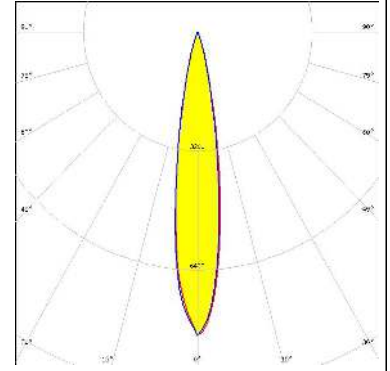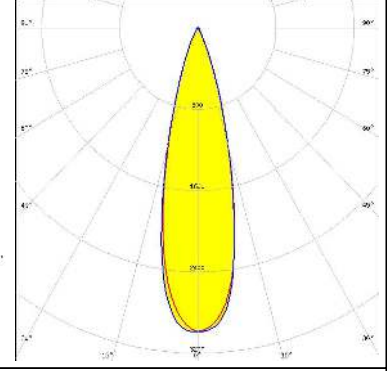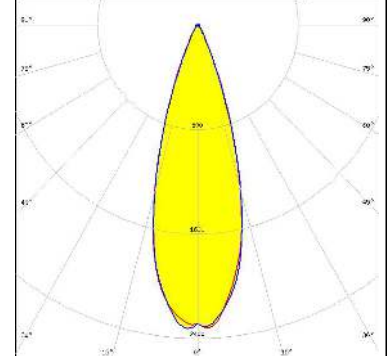





OPTICAL RESULTS (SIMULATED):

<p>LUMILEDS</p> <p>LED LUXEON HL2X</p> <p>FWHM / FWTM 25.0° / 40.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 4.6 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>LUMILEDS</p> <p>LED LUXEON Z ES</p> <p>FWHM / FWTM 17.0° / 32.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 8.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>NICHIA</p> <p>LED NCSxE17A</p> <p>FWHM / FWTM 27.0° / 46.0°</p> <p>Efficiency 73 %</p> <p>Peak intensity 3 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour RGB</p> <p>Required components:</p>		
<p>NICHIA</p> <p>LED NV4x144A</p> <p>FWHM / FWTM 32.0° / 52.0°</p> <p>Efficiency 78 %</p> <p>Peak intensity 2.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		

OPTICAL RESULTS (SIMULATED):

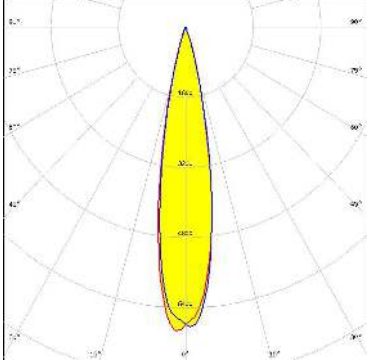	<p>LED NVSxE21A FWHM / FWTM 17.0° / 34.0° Efficiency 82 % Peak intensity 7.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
	<p>LED OSCONIQ P 3737 (3W version) FWHM / FWTM 24.0° / 41.0° Efficiency 85 % Peak intensity 4.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
	<p>LED OSOLON PURE 1010 FWHM / FWTM 20.0° / 38.0° Efficiency 79 % Peak intensity 5.2 cd/lm LEDs/each optic 4 Light colour White Required components:</p>		
	<p>LED OSOLON SSL 150 FWHM / FWTM 20.0° / 34.0° Efficiency 88 % LEDs/each optic 1 Light colour White Required components:</p>		

OPTICAL RESULTS (SIMULATED):
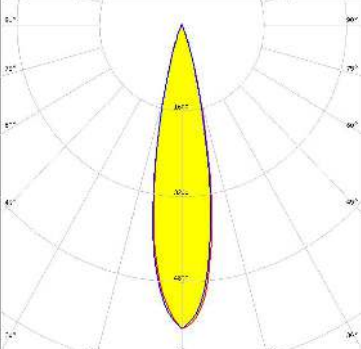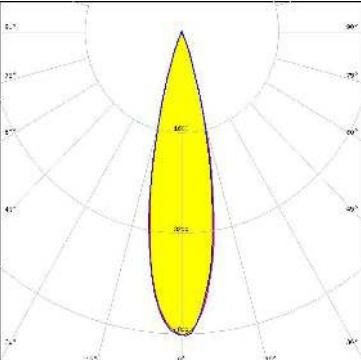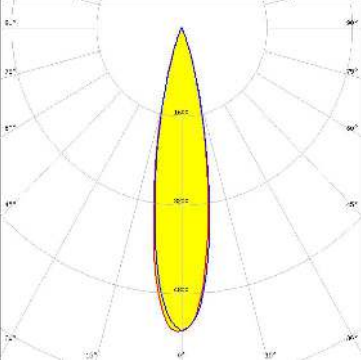
<p>OSRAM Opto Semiconductors</p> <p>LED: OSTAR Stage (S2WM)</p> <p>FWHM / FWTM: 22.0° / 37.0°</p> <p>Efficiency: 86 %</p> <p>Peak intensity: 5.7 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>		
<p>SAMSUNG</p> <p>LED: LH351B</p> <p>FWHM / FWTM: 24.0° / 40.0°</p> <p>Efficiency: 87 %</p> <p>Peak intensity: 4.8 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>		
<p>SEMI SEOUL SEMICONDUCTOR</p> <p>LED: Z5M4</p> <p>FWHM / FWTM: 21.0° / 38.0°</p> <p>Efficiency: 85 %</p> <p>Peak intensity: 5.5 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>		

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)