

481 Series Alarm Indicating Fuse



| Agency Approvals | | | | | | |
|----------------------------|--------------------|--------------|--|--|--|--|
| Agency | Agency File Number | Ampere Range | | | | |
| A 1 | E71611 | 0.180–20 A | | | | |
| SP. | 29862 | 0.180–20 A | | | | |
| Electrical Characteristics | | | | | | |

% of Ampere Rating Opening Time 100% 10 Minutes, Minimum 150% 5 Minutes, Maximum

Description

481 Series alarm indicating fuses are designed to reduce down time by immediately pinpointing the blown (open) circuit while triggering an LED or audio alarm. This item requires 482 Series mating fuse holder.

(SP

RoHS

· Body is constructed of

black plolyphenylene

sulfide with UL 94 V-0 flammability rating.

• Contacts made of bright

alloy-plated beryillium

copper.

All ranges of 481 Series fuses are available as our original design, and the 2-20 amp range is now available as a RoHS compliant option (use the "P" designator when ordering). See the part numbering section of this data sheet for related ordering instructions.

Features

- Color-coded indicator flags indicate ampere rating.
- Clear plastic lens option available for additional safety.
- RoHS compliant

Applications

Ideal for telecommunications and control panel circuits

| Ampere Rating (A) | Amp Code | Max Voltage Rating (V) | Interrupting Rating | Body Color Code | Nominal Cold Resistance (Ohms) | Nominal Melting I²t (A² Sec.) | Agency Approvals | |
|-------------------------|-------------|---------------------------------------|------------------------|-----------------------|--------------------------------------|----------------------------------|---------------------|---|
| | | | | | | | 71 | |
| 0.180* | .180 | i i i i i i i i i i i i i i i i i i i | | Yellow | 6.25 | 0.0400 | X | X |
| 0.200* | .200 | | | Red/Black | 5.70 | 0.0576 | X | X |
| 0.250* | .250 | | 40 A @ 175 VDC | Violet | 4.20 | 0.0625 | Х | X |
| 0.375* | .375 | | | Gray/White | 2.00 | 0.230 | X | X |
| 0.500* | .500 | | | Red | 1.52 | 0.490 | X | X |
| 0.650* | .650 | | | Black | 1.25 | 0.723 | X | X |
| 0.750* | .750 | | 450 A @ 60 VDC | Brown | .980 | 1.32 | X | X |
| 1.00* | 001. | | | Gray | .665 | 1.82 | X | X |
| 1.33* | 1.33 | | 300 A @ 125 VAC | White | .480 | 3.13 | X | X |
| 1.50* | 01.5 | 125 VAC | (up to 20 A) | Yellow/White | .385 | 2.55 | X | X |
| 2.00 | 002. | & | | Orange | .120 | 10.2 | X | X |
| 2.50 | 02.5 | 125 VDC | 300 A @ 125 VDC | Orange/White | 0.093 | 16.0 | X | X |
| 3.00 | 003. | | (up to 15 A) | Blue | .0670 | 25.0 | X | X |
| 3.50 | 03.5 | | | Blue/White | .0415 | 10.5 | X | X |
| 4.00 | 004. | | 200 A @ 125 VDC | Brown/White | .0350 | 36.0 | X | X |
| 5.00 | 005. | | (up to 20 A) | Green | .0285 | 64.0 | X | X |
| 7.50 | 07.5 | | | White/Black | .0113 | 121.0 | X | X |
| 10.0 | 010. | | 460 A @ 60 VDC | White/Red | .00840 | 380.3 | X | X |
| 12.0 | 012. | | (up to 15 A) | Yellow/Green | .00660 | 571.2 | X | X |
| 15.0 | 015. | | | Blue/Red | .00580 | 900.0 | X | X |
| 20.0** | 020. | | | White/Green | .00394 | 1024.0 | Х | X |

* 0.180 A thru 1.5 A items are not available for sale as a RoHS compliant "P" option

**20 A Fuseholder (482 Series) must be used. Fuse is keyed to prevent insertion in lower rated holders.


20 A Fuseholder (482 Series) is designed to accept all ratings up to 20 amperes.

Product Characteristics

| | Body: Polyphenylene Sulfide (UL 94VO) | |
|-----------|---|--|
| Material | Terminations: Beryllium Copper/Tin Plated | |
| | Optional Lens: Nylon | |
| Vibration | MIL-STD-202 Method 201 | |


| Operating Temperature | – 55 °C to 125 °C. |
|--|--|
| Thermal Shock | Withstands 5 cycles of – 55 $^{\rm o}{\rm C}$ to 125 $^{\rm o}{\rm C}$ |
| Insulation Resistance (After Opening) | Greater than 10,000 ohms. |

Dimensions

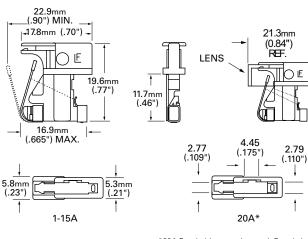


*20A Fuseholder must be used. Fuse is keyed to prevent insertion in lower rated holders. 20A Fuseholder is designed to accept all ratings up to 20 amperes.

Average Time Current Curves

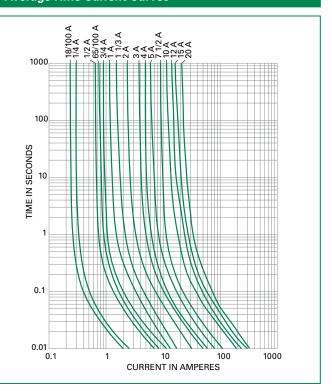

Part Numbering System

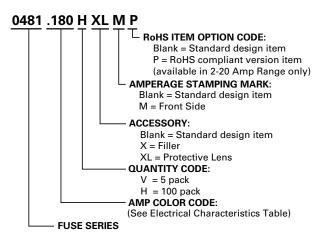



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littlefuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littlefuse.com/disclaimer-electronics.