

**61565 PRODUCT DETAILS**

<i>Property</i>	<i>Details</i>
<i>Height</i>	0.19 in (4.83 mm)
<i>Width</i>	0.25 in (6.35 mm)
<i>Perimeter</i>	1.73 in
<i>Weight</i>	0.1 lbs per foot (0.15 kg per meter)
<i>Material</i>	6063-T5 Aluminum Extrusion Alloy




**THERMAL DATA**

Natural Convection: 40.45 based on 70 C temp rise above ambient.

Thermal resistance is calculated based on a single 1" (25.4mm) square heat source centered on the heat sink. If you have distributed loads, then you can expect 10% better performance in natural convection and 20% better performance in forced convection.

**Natural Convection**

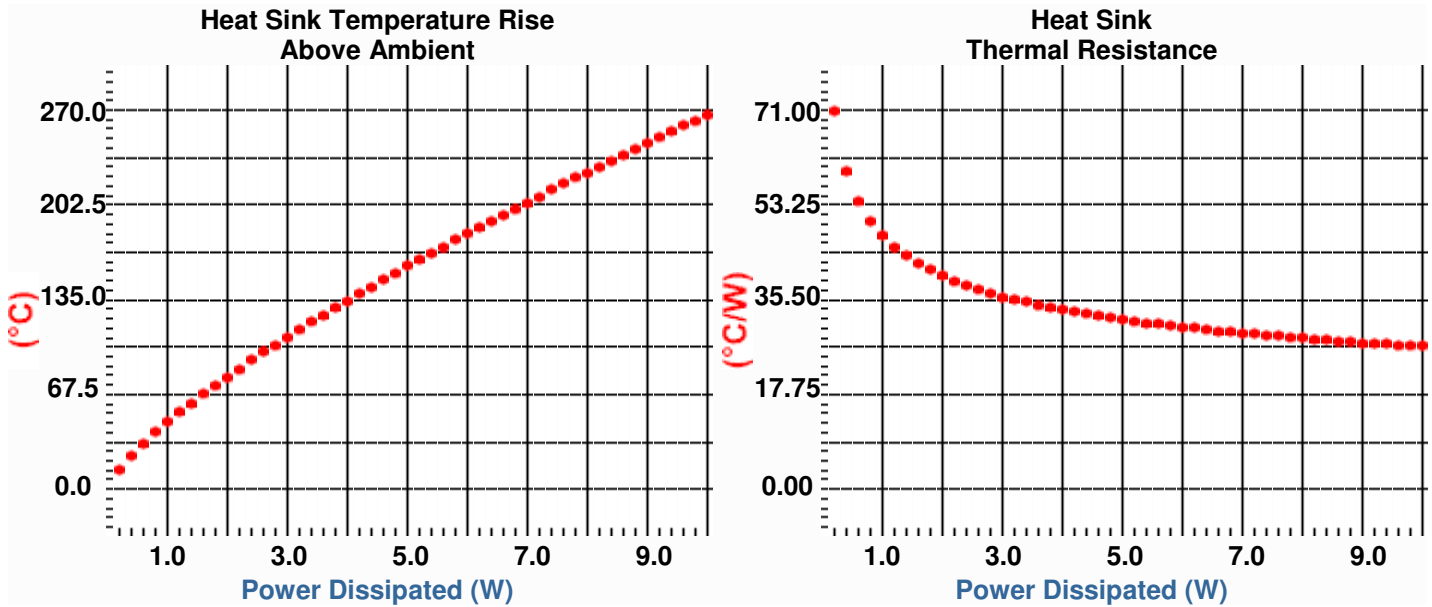

**Forced Convection**

