

## **KSC900**

## Low Frequency & Low Noise Amplifier

- Collector-Base Voltage: V<sub>CBO</sub>=30V
  Low Noise Level: NL=50mV (MAX)
- Suffix "-C" means Center Collector (1. Emitter 2. Collector 3. Base)



#### 1. Emitter 2. Base 3. Collector

## **NPN Epitaxial Silicon Transistor**

### **Absolute Maximum Ratings** $T_a$ =25°C unless otherwise noted

Symbol	Parameter	Value	Units
V <sub>CBO</sub>	Collector-Base Voltage	30	V
V <sub>CEO</sub>	Collector-Emitter Voltage	25	V
V <sub>EBO</sub>	Emitter-Base Voltage	5	V
I <sub>C</sub>	Collector Current	50	mA
P <sub>C</sub>	Collector Power Dissipation	250	mW
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>STG</sub>	Storage Temperature	-55 ~ 150	°C

### Electrical Characteristics T<sub>a</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV <sub>CBO</sub>	Collector-Base Breakdown Voltage	$I_{C}=100\mu A, I_{E}=0$	30			V
BV <sub>CEO</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> =10mA, I <sub>B</sub> =0	25			V
BV <sub>EBO</sub>	Emitter-Base Breakdown Voltage	$I_{E}=10\mu A, I_{C}=0$	5			V
I <sub>CBO</sub>	Collector Cut-off Current	V <sub>CB</sub> =25V, I <sub>E</sub> =0			50	nA
I <sub>EBO</sub>	Emitter Cut-off Current	V <sub>EB</sub> =3V, I <sub>C</sub> =0			100	nA
h <sub>FE</sub>	DC Current Gain	V <sub>CE</sub> =3V, I <sub>C</sub> =0.5mA	120		1000	
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	I <sub>C</sub> =20mA, I <sub>B</sub> =2mA		0.1	0.2	V
V <sub>BE</sub> (on)	Base-Emitter On Voltage	V <sub>CE</sub> =3V, I <sub>C</sub> =0.5mA		0.62	0.7	V
f <sub>T</sub>	Current Gain Bandwidth Product	V <sub>CE</sub> =3V, I <sub>C</sub> =1mA		100		MHz
NL	Noise Level	$V_{CC}$ =12V, $I_{C}$ =0.1mA $R_{S}$ =25k $\Omega$ $A_{V}$ =80dB, f=1KHz		30	50	mV

## **h**<sub>FE</sub> Classification

Classification	Υ	G	L	V
h <sub>FE</sub>	120 ~ 240	200 ~ 400	350 ~ 700	600 ~ 1000

# **Typical Characteristics**

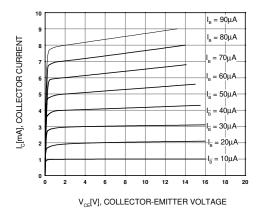


Figure 1. Static Characteristic




Figure 2. DC current Gain



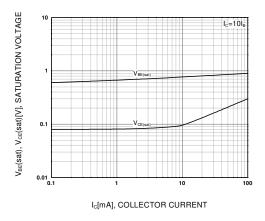


Figure 3. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage

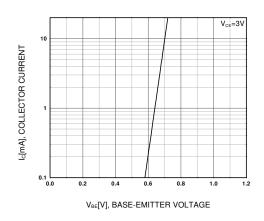


Figure 4. Base-Emitter On Voltage

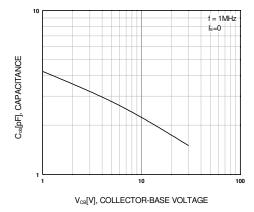


Figure 5. Collector Output Capacitance


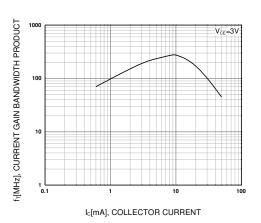



Figure 6. Current Gain Bandwidth Product


©2002 Fairchild Semiconductor Corporation Rev. B1, September 2002

# **Package Dimensions**

TO-92

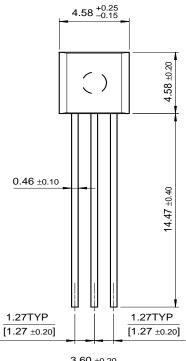

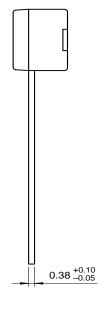



### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT™	ImpliedDisconnect™	PACMAN™	SPM™
ActiveArray™	FACT Quiet series™	ISOPLANAR™	POP™	Stealth™
Bottomless™	FAST <sup>®</sup>	LittleFET™	Power247™	SuperSOT™-3
CoolFET™	FASTr™	MicroFET™	PowerTrench <sup>®</sup>	SuperSOT™-6
CROSSVOLT™	FRFET™	MicroPak™	QFET™	SuperSOT™-8
DOME™	GlobalOptoisolator™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	GTO™	MSX™	QT Optoelectronics™	TinyLogic™
E <sup>2</sup> CMOS™	HiSeC™	MSXPro™	Quiet Series™	TruTranslation™
EnSigna™	$I^2C^{TM}$	OCXTM	RapidConfigure™	UHC™
Across the board.	. Around the world.™	OCXPro™	RapidConnect™	UltraFET®
The Power Franchise™		OPTOLOGIC <sup>®</sup>	SILENT SWITCHER®	VCX™
Programmable Ad	ctive Droop™	OPTOPLANAR™	SMART START™	

### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Rev. I1

### **PRODUCT STATUS DEFINITIONS**

### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.