


- INSTRUCTIONS:**
- 1) CUT THE WIRES ACCORDINGLY AS SHOWN ABOVE.
 - 2) RUN IT THROUGH INSULATOR AND SOLDER THE CONTACT WIRES TO THE PLUG ASSEMBLY. CONNECT THE INSULATOR TO THE PLUG ASSEMBLY.
 - 3) NOW SLIDE THE CONNECTED PLUG ASSEMBLY, INSULATOR INTO THE TINI QG HOUSING. MAKE SURE THAT THE PLUG ASSEMBLY IS BUTTED UP AGAINST THE FRONT OF THE TINI QG HOUSING.
 - 4) SOLDER THE GROUND TERMINAL WIRE TO THE TINI QG HOUSING'S LOWER THRU HOLE AS SHOWN.
 - 5) SLIDE THE BOTTOM PLASTIC HOUSING UP TOWARDS THE MALE HOUSING. THIS HOUSING CAN BE INSTALLED 90° ORIENTATED OTHER WAY IF PREFERRED.
 - 6) DROP AND SLIDE THE TOP RIGHT ANGLE HOUSING INTO THE GROVE SUCH AS IT LATCHES WITH THE BOTTOM PLASTIC AND MALE HOUSING.
 - 7) SLIDE THE CABLE CLAMP THROUGH THE CABLE INTO THE TOP/BOT HOUSINGS AS SHOWN.
 - 8) SCREW THE PLUG HANDLE AND POP IN THE BOOT TO ASSEMBLE FULL PRODUCT.

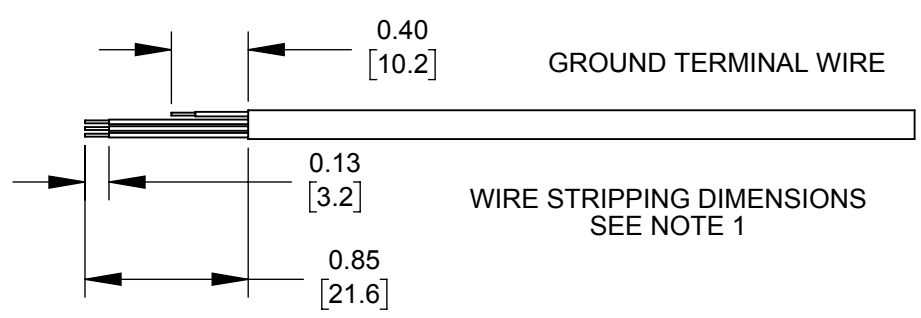

REV	ECO NUMBER	DATE	BY	APVD
0C	ADDED DIMENSIONS LAYOUT CHANGED	09/17/18	AM	*
0B	EDITED NOTES	03/10/17	AM	*
REVISIONS				

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES [mm]

- TWO PLACE DECIMALS ±0.02 [0.5]

- THREE PLACE DECIMALS ±0.005 [0.13]

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.							
SIZE *	WIDTH *	MULT *	LBS/M *	TEMPER *	MATERIAL *		
FINISH *				SPEC No. *			
FIRST USED ON *		SCALE 1:1		Switchcraft [®]			
DATE DRAWN	BY	CHKD	APVD				
01/03/17	AM	*	*	SHEET 1 OF 1			
NAME				PART No.		REV	
TINI QG, MALE RA, RoHS				TARA_MX SERIES_CD		0C	

CUSTOMER DRAWING