

# MSO/DS7000 Series Digital Oscilloscope

- Analog bandwidth: 500 MHz, 350 MHz, 200 MHz, and 100 MHz; bandwidth upgrade option supported
- 4 analog channels, 1 EXT channel, and 16 digital channels (Option)
- Up to 10 GSa/s real-time sample rate
- Up to 500 Mpts memory depth (Option)
- High waveform capture rate (over 600,000 waveforms per second)
- Up to 450,000 frames of hardware real-time and ceaseless waveforms recording and playback functions
- Integrates 7 independent instruments into 1, including digital oscilloscope, 16-channel logic analyzer, spectrum analyzer, arbitrary waveform generator, digital voltmeter, 6-digit frequency counter and totalizer, and protocol analyzer
- A variety of serial protocol triggers and decodes
- Auto measurement of 41 waveform parameters; full-memory hardware measurement function
- A variety of math operations, built-in enhanced FFT analysis, and peak search function
- Waveform histogram analysis (standard)
- Independent search, navigation keys, and event table
- Built-in advanced power analysis software (option)
- User-defined one-key quick operation
- 10.1-inch capacitive multi-touch screen, 256-level intensity grading display, with color persistence
- Multiple interfaces available: USB HOST&DEVICE, LAN(LXI), HDMI, TRIG OUT, and USB-GPIB
- Web Control remote command
- Unique online version upgrade
- Novel and delicate industrial design, easy to operate

MSO7000/DS7000 series is a multifunctional and high-performance digital oscilloscope designed on the basis of the UltraVision II technology developed by **RIGOL**. Integrating 7 independent instruments into one, the MSO7000/DS7000 series is equipped with super high sample bandwidth ratio, extremely high memory depth, clear display, excellent waveform capture rate, and powerful data analysis functions. Many of its specifications have reached the top level in the industry. With sound solutions for mainframes, optional accessories, and application software, it has aroused great attention from customers in the areas such as industrial control, power supply, and automotive electronics.

# MSO7000/ DS7000 Series Digital Oscilloscope

## ► Self-developed ASIC chip- “RIGOL Chip”

MSO/DS7000 series digital oscilloscope adopts RIGOL's self-developed chipset "Phoenix", which can gain the data acquisition capability of up to 10 GSa/s sample rate, realizing the high integration of all the function modules required for the analog front-end (AFE), and greatly improving the consistency and reliability of the digital oscilloscope. The 1 M $\Omega$ -path digital input attenuator can switch the scale rapidly and quietly. The unique circuit design can shorten the overload recovery time of the 1 M $\Omega$ -mode to 0.5% of that of the existing products. This is the first time for a Chinese enterprise to launch the ASIC chip, which is of great strategic significance in the global electronic test and measurement instrument industry.



### “ $\gamma$ Phoenixis” Differential Probe Amplifier

- Up to 6 GHz Bandwidth
- On-Chip Flatness Trimming
- Low Noise

### “Ankaa” DSO Signal Processing ASIC

- Low Noise Analog Front-End
- Synchronous Processing of Clock and Data
- 10 GSa/s Data Acquisition
- DSP for Digital Oscilloscope


### “ $\beta$ Phoenixis” Analog Front-End

- Most Highly Integrated Analog Front-End
- Up to 4 GHz Bandwidth
- Fast Overdrive Recovery
- Electronic Attenuator for 1M $\Omega$  Mode

## ► Upgrade of UltraVision II Technology— Carefully Crafted with Craftsman's Spirit


Based on the mature UltraVision technology, the R&D of the RIGOL's digital oscilloscope has again made a breakthrough in its achievements, launching the brand new UltraVison II technology platform. This innovative platform integrates RIGOL's latest research achievements in the digital oscilloscope's signal processing, data analysis, and waveform visualization, with higher waveform capture rate, full digital trigger technology, and full memory hardware measurement technology. The MSO/DS7000 series digital oscilloscope is equipped with the UltraVison II technical platform, and also integrates other instrument modules, such as MSO, arbitrary waveform generator, digital voltmeter, 6-digit counter and totalizer, and protocol analyzer, offering extraordinary user experience at an unprecedented price point.

- high sample rate (maximum sample rate: 10 GSa/s)
- high memory depth (maximum memory depth of 500 Mpts, optional)
- High waveform capture rate (over 600,000 waveforms per second)
- Rea-time waveform recording and playback functions (up to 450,000 frames)
- Full memory hardware measurement technology
- Full digital trigger technology

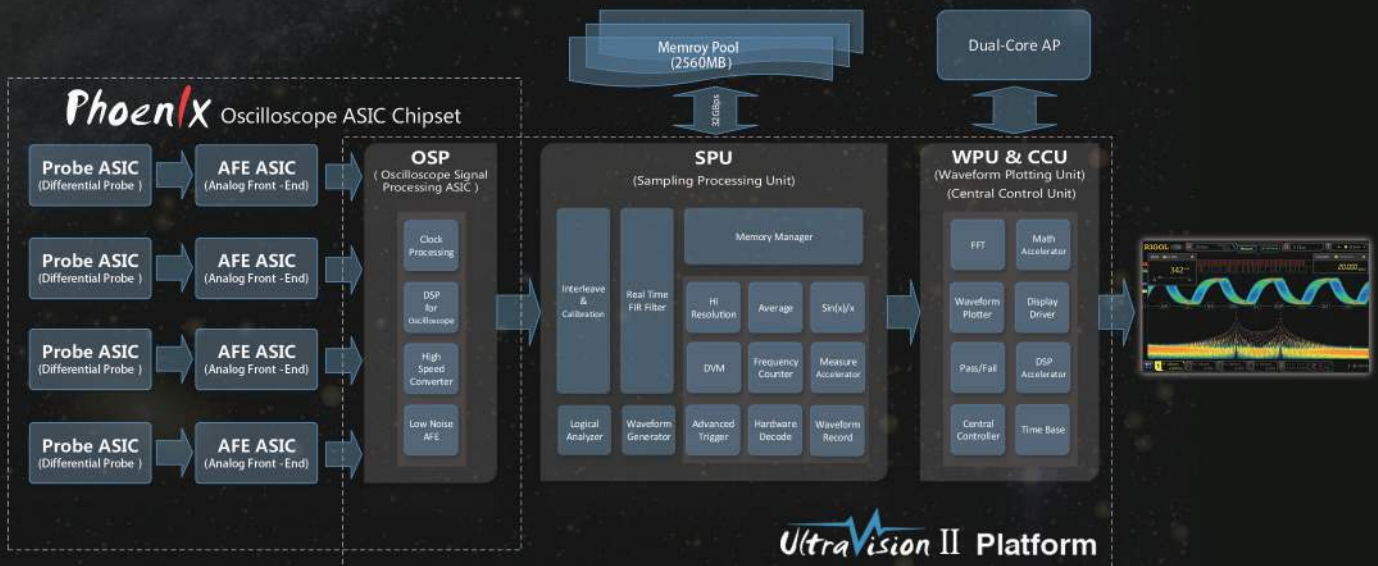

# ► Sophisticated and Convenient Industry Design -- Client Oriented

The innovative physical appearance of the instrument and the thin design in both sides of the instrument not only make its LCD display prominent but also keeps its shape delicate, making it portable and easy to operate.

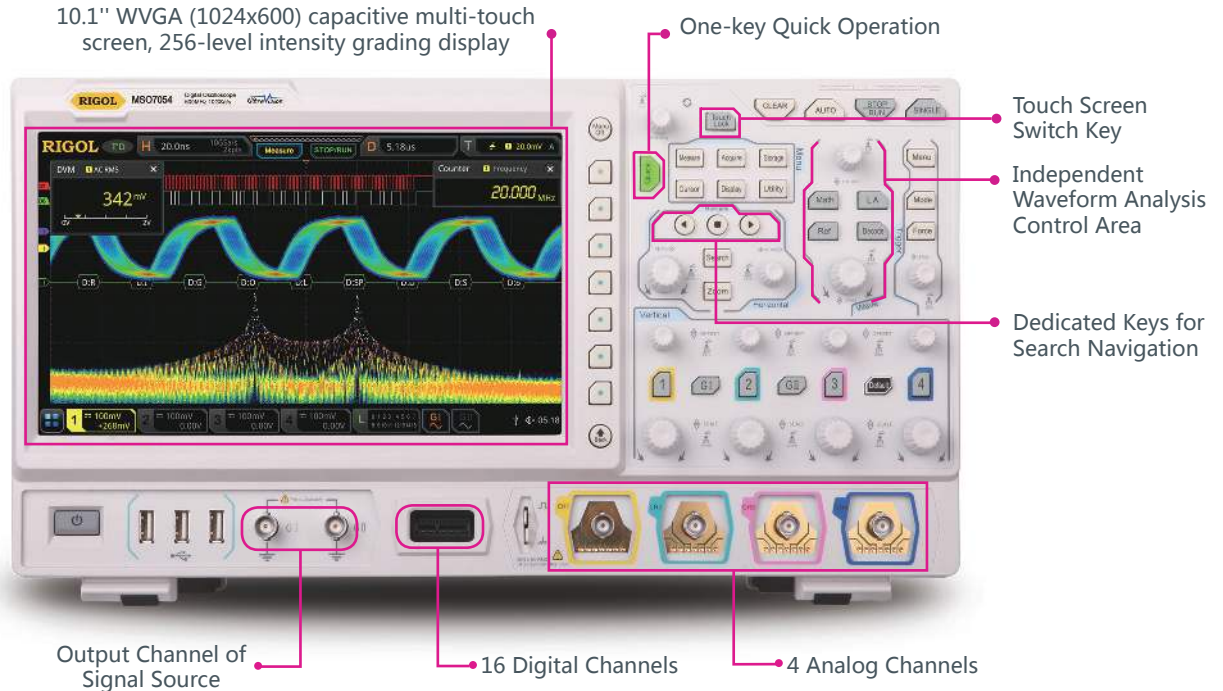

The 10.1-inch capacitive multi-touch screen supports various touch gestures, making it always keep up with the mainstream development trend for screen operation. The touch gestures such as "tap", "Pinch & Stretch", "Drag", and "Rectangle Drawing" make you find the measurement operation more smooth, convenient, and easy to learn. Meanwhile, the MSO7000/DS7000 series digital oscilloscope still keeps the knob and key operation as what RIGOL traditional digital oscilloscopes have, optimizing the user-friendly interactive experience to a large extent.




## ► Overview of RIGOL's Medium and High-end Series Products



	MSO/DS4000	DS6000	MSO/DS7000
Analog Channel	4 + 16	4	4 + 16
Analog Bandwidth	100 MHz to 500 MHz	600 MHz to 1 GHz	100 MHz to 500 MHz
Max. Sample Rate	4 GSa/s	5 GSa/s	10 GSa/s
Max. Memory Depth	140 Mpts/CH	140 Mpts/CH	500 Mpts (optional)
Waveform Capture Rate	> 110,000 wfms/s	> 180,000 wfms/s	> 600,000 wfms/s
Max. Frames of Waveform Recording	200,000	200,000	450,000
LCD	9"	10.1"	10.1" capacitive multi-touch screen
Hardware Template Test	Standard	Standard	Standard
Built-in Arbitrary Waveform Generator	None	None	2 CH, 25 MHz (optional)
Built-in Digital Voltmeter	None	None	Standard
Built-in Hardware Counter	6-digit frequency counter	6-digit frequency counter	6-digit frequency counter + totalizer
Search and Navigation	None	None	Standard, supporting table display
Power Analysis	PC (option)	PC (option)	Built-in UPA (optional)
Serial Protocol Analysis	RS232/UART, I2C, SPI, CAN, FlexRay, and MIL-STD-1553	RS232/UART, I2C, SPI, CAN, and FlexRay	RS232/UART, I2C, SPI, CAN, LIN, FlexRay, I2S, and MIL-STD-1553
Waveform Color Persistence	None	None	Standard
Histogram	None	None	Standard
FFT	Standard	Standard	Enhanced FFT, Standard
MATH	Displays 1 function at the same time	Displays 1 function at the same time	Displays 4 functions at the same time
Connectivity	standard: USB, LAN, and VGA option: USB-GPIB	standard: USB, VGA, and LAN option: USB-GPIB	standard: USB, LAN, and HDMI option: USB-GPIB

# Design Features

## ► 7-into-1 Integrated Digital Oscilloscope, with Excellent Performance at Unprecedented Price Point

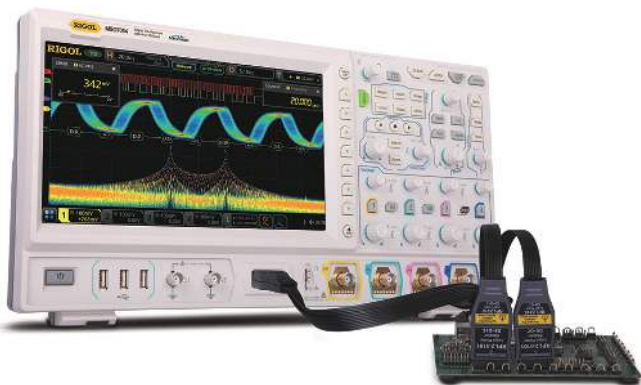

In today's integrated design field, a highly integrated comprehensive digital oscilloscope has become a useful tool for design engineers. The MSO7000/DS7000 series digital oscilloscope launched by **RIGOL** this time integrates 7 independent instruments into 1, including one digital oscilloscope, one 16-channel logic analyzer, one spectrum analyzer, one arbitrary waveform generator, one digital voltmeter, one high-precision frequency counter and totalizer, and one protocol analyzer. The MSO7000/DS7000 series offers you a flexible and economical solution to address your actual needs.

### 1. Digital Oscilloscope

- Four bandwidth models: 500 MHz, 350 MHz, 200 MHz, and 100 MHz; with the bandwidth upgradeable
- Up to 10 GSa/s real-time sample rate per channel
- 4 analog channels and 1 EXT channel
- Up to 500 Mpts memory depth (option)
- Maximum waveform capture rate of 600,000 wfms/s
- 500 MHz passive voltage probe for each channel (standard)




### 2. Logic Analyzer

- Standard configuration of 16 digital channels and 1 RPL2316 logic analyzer probe for the MSO model
- 62.5 Mpts memory depth for the waveforms of all the digital channels
- Up to 1.25 GSa/s sample rate
- Hardware real-time waveform recording and playback functions supported
- Mixed (analog channel and digital channel) trigger and decode supported
- Convenient digital channel grouping and group operation




### 3. Spectrum Analyzer

- Standard configuration of enhanced FFT, real-time operation for max. 1 Mpts waveform data
- Max. frequency range: oscilloscope analog bandwidth
- Up to 4 groups of operations can be displayed at the same time
- Independent FFT color persistence view supported
- Up to 15 peaks available for the peak search function; event table available to be exported

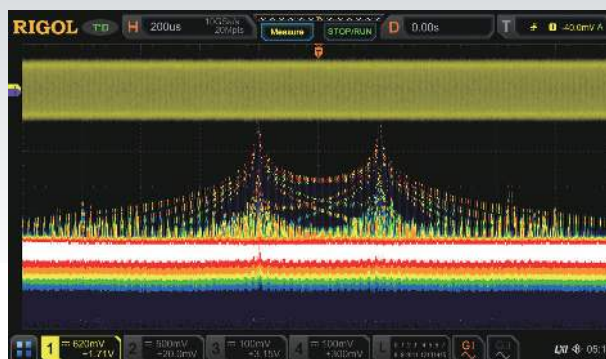


#### 4.Arbitrary Waveform Generator (Option)

- Standard configuration of 2 waveforms output channels for the hardware of MSO model, and only AWG option is required to be ordered
- 13 pre-defined waveforms
- Up to 25 MHz frequency
- Up to 200 MSa/s sample rate
- Advanced modulation, sweep, and burst signal output supported

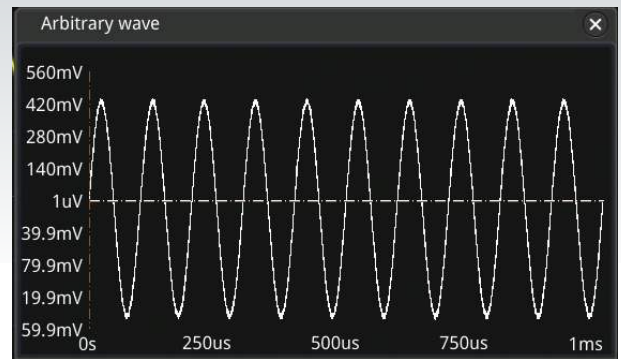

#### 5.Digital Voltmeter

- 3–digit DC/AC RMS/AC+DC RMS voltage measurement
- Sound an alarm for reaching or exceeding the limits
- Display the latest measurement results in the form of a diagram, and display the extrema over the last 3 seconds

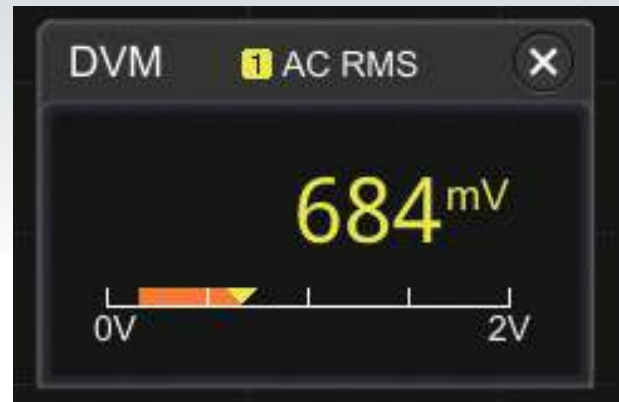

#### 6.High-precision Frequency Counter and Totalizer

- Optional 3 to 6–digit high–precision frequency counter
- Support the statistics on the maximum and minimum values of the frequency
- 48–bit totalizer (standard)



#### 7.Protocol Analyzer (Option)


- Support RS232/UART, I2C, SPI, CAN, LIN, I2S, FlexRay, and MIL–STD–1553 serial bus
- Support the protocol trigger and decoding for the analog channel and the digital channel
- RS232/UART, I2C, and SPI protocols support the waveform search function
- Capable of working with the waveform recording, pass/fail test, and zone trigger



## ► Super High Sample Bandwidth Ratio

Bandwidth and the sample rate are two key technical specifications that engineers take priority in choosing the digital oscilloscope. Bandwidth determines the maximum frequency that the oscilloscope can acquire. The higher the bandwidth of the oscilloscope, the better the oscilloscope can keep the steep, fast, abundant harmonics components and energies of the signal under test. The sample rate determines the time interval of the sample points, which determines the refinement of the outlined waveforms. The MSO7000/DS7000 series provides a maximum of 10 GSa/s real-time sample rate and 20X sample rate/bandwidth ratio for 500 MHz bandwidth, which makes itself far ahead of the same level products.

While maintaining the super high sample rate of 10 GSa/s, the MSO7000/DS7000 series also has a maximum of 500 Mpts memory depth, enabling itself to capture more events in one acquisition. This provides sufficient time for users to observe while retaining the waveform details to a large extent. Thus, users can not only get the detailed information about the waveforms, but also can take an overview of the waveforms.

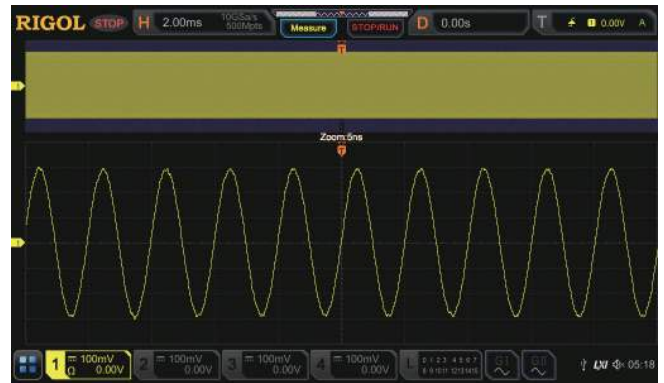

*With up to 500 M memory depth, you can capture 50 ms of waveforms while maintaining a sample rate of 10 G, without causing the waveforms to be distorted.*

## ► 600,000 wfms/s Capture Rate

Engineers often have to spend a lot of time and efforts in locating the problem in design and debugging. Therefore, a proper debugging tool will help engineers to work more efficiently. MSO7000/DS7000 series digital oscilloscope can provide the waveform capture rate of up to 600,000 wfms/s, so that the glitches and infrequent events in waveforms can be quickly identified, greatly improving the debugging efficiency for the engineers.

256-level intensity grading display can reflect the occurrence frequencies of the infrequent events. Its newly added color persistence function can highlight the signal of different probabilities with a different color grading. You can set the persistence time to control the duration time for the waveforms to be displayed on the screen, so that the display capability of the infrequent events can be further enhanced.



*Capture occasional exceptional signals in a highly refresh mode.*



*Changes of each frame of waveforms of the sweep signal can be clearly observed in the highly refresh mode.*



## ► Hardware Full Memory Auto Measurement

The auto measurement is the basic tool for engineers to make a rapid analysis of the signals, and it requires more efficient measurement process and accurate measurement results. MSO7000/DS7000 supports hardware full memory auto measurement, provides measurements of 41 waveform parameters, supports displaying the statistics and analysis of the measurement results for 10 items. In addition, the auto measurement function also supports auto cursor indicator and measurement range selection. You can also set the threshold for each measurement source independently, making the waveform measurement more flexible. To get a quick view about how to make measurements, we provide you with detailed help documents and diagrams to better illustrate the measurement methods for each item.

Based on the different data sources, auto measurement consists of two modes: Normal and Precision. In Normal mode, the data volume increases from 1 k to 1 M, realizing the optimization of the basic measurement function. In Precision mode, the oscilloscope provides hardware full-memory auto measurement, greatly improving the precision of the waveform measurement. With the 500 Mpts memory depth, any measurement for the item can be completed within 1.5 s, addressing the issue of long observation of the signal for measurement perfectly.



Observe and accurately measure two signals with great frequency deviations. The full-memory hardware measurement can measure accurate frequency value of the waveforms with 340k rising edges.



The ordinary 1 Mpts software measurement can no longer measure the accurate frequency of the high-frequency signal.

## ► Histogram Analysis

The MSO7000/DS7000 series supports the histogram analysis function, available to provide the horizontal waveform histogram, vertical waveform histogram, and measurement histogram. The horizontal waveform histogram is applicable for observing the number of jitters and jitter distribution of the clock signal; the vertical waveform histogram is applicable for observing the noise distribution of the signal; and measurement histogram is applicable for observing the distribution of the measurement results of the signal under test over a long period of time to help users quickly find out the potential abnormalities of the signal.



Histogram of Horizontal Waveforms

## ► Hardware Waveform Recording and Playback

The memory depth is one of the key specifications of the oscilloscope. However, whatever high the memory depth, it cannot be guaranteed that all the signals that users are concerned about can be captured in one time. This is especially true for the occurrence of the infrequent signals during debugging design or locating specific events from the long captured complicated signals. In addition, the long memory depth will be bound to reduce the response time for the oscilloscope. The hardware waveform recording and playback function can address this issue.

The MSO7000/DS7000 series provides ceaseless recording and playback for a maximum of 450,000 frames of hardware

real-time waveforms. This specification is second to none in the industry. The hardware waveform recording function adopts the segmented storage technology. With the technology, you can set the trigger conditions to make a selective choice in capturing and saving the signals that you are interested in, then mark the time on the signal. This has not only ensured the high capture efficiency, but also prolonged the overall observation time for the waveforms. The hardware waveform playback function enables you to have sufficient time to take a careful view and analysis of the recorded segment of the waveforms.



## ► Hardware Pass/Fail Test

The MSO7000/DS7000 series is equipped with hardware pass/fail test function as the standard configuration, which can be used in signal monitoring for a long time, signal monitoring during design, and signal test in the production line. You can set the test mask based on the known "standard" waveform, and then compare the signal under test with the "standard" waveform to display the statistics on the test results. When a successful or failed test is detected by the oscilloscope, you can choose to immediately stop monitoring, enable the beeper to sound an alarm, or save the current screen image. Also, you can choose to continue monitoring.



*The Pass/Fail test function can quickly make a statistics on the occurrence probability of the signal exceptions.*

## ► Enhanced FFT Analysis

The MSO7000/DS7000 series can analyze 1 Mpts of FFTs, which improves the frequency resolution to a large extent, convenient for you to better analyze the disturbance noise in the circuit under test. To adjust the spectrum waveforms to be observed, set the center frequency and the span; or set the start frequency and the stop frequency. The MSO7000/DS7000 series also provides the peak search function, which can auto mark up to 15 peaks and display their frequencies and amplitudes in the form of a list. Such information and the non-peak section in the frequency-domain cursor measurement can greatly improve the working efficiency of the engineers.



*With the near-field probe, you can easily observe the spectrum peak in the frequency domain when the probe approaches to the radiation leakage point.*



## ► A Variety of Triggers and Protocol Decodings

MSO7000/DS7000 series digital oscilloscope provides powerful trigger functions, including Edge trigger, Pulse trigger, Slope trigger, Video trigger, Pattern trigger, Duration trigger, Timeout trigger, Runt trigger, Window trigger, Delay trigger, Setup/Hold trigger, Nth Edge trigger, and serial protocol trigger. These triggers can help engineers accurately and quickly capture and identify the signals of great interest.

The optional serial protocol decoding is capable of decoding 4 serial buses simultaneously. The full memory data analysis and the decoding event table display can help engineers quickly find out the system failure and locate the symbol error waveforms, greatly improving the debugging efficiency of the overall system signals. The MSO7000/DS7000 series also provides optional decodings such as RS232/UART, I2C, SPI, CAN, LIN, I2S, FlexRay, and MIL-STD-1553. These serial bus decodings can help engineers make a deep analysis on the waveforms, and they are widely applied to the auto electronics, aerospace, and other fields. Besides, the oscilloscope has a standard parallel bus decoding, which is capable of performing the debugging test for the mixed signals of up to 20 channels (analog channel and digital channel) simultaneously.




The Runt trigger helps you capture the runt pulse signal in the pulse train



## ► Zone Trigger

In face of the complex and variable circuit signal in the circuit debugging, it is easy for us to find the transient occasional exception signals on the oscilloscope with a high waveform capture rate. However, it is not easy to isolate the exceptional signal from the complex circuit signals and trigger them stably. You have to spend more time on the usage of some advanced trigger types, and sometimes even the powerful advanced trigger is unable to make it. The MSO7000/DS7000 series is specially equipped with touch screen-based zone trigger function, which can help users accelerate the signal isolation process. The zone trigger function is easy to operate. You only need to use the specified rectangle drawing gesture to draw one or two rectangular zones on the corresponding signal section, then you can quickly isolate the signal for observation.

The zone trigger can work with other 20 trigger types, and it also supports the decoding, waveform recording, and pass/fail test functions. This is conducive to the debugging of the complex signals.

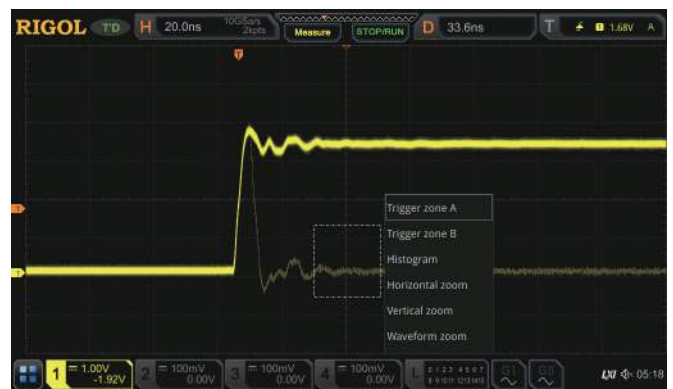

Draw a rectangle on the transient exception signal and select Trigger zone A.



Quickly isolate the exceptional signal with Edge trigger and Zone trigger.

## ► Search and Navigation

As the memory depth of the oscilloscope becomes higher, locating a specific event from the thousands of captured complicated waveforms is a tedious task that requires much time and efforts. The waveform search function can help you quickly locate the concerned events and make a mark. Then, you can use the specific navigation keys to quickly locate the marked signal and make measurements easily. The search conditions for waveform search include edge, pulse, runt pulse, and slope. The searched event information is displayed in the form of a list.



The search and navigation function can quickly search for the signals with exceptions and locate them accurately.

## ► Power Analysis (Option)

To cater to the increasing test demand for the switch power supply and the power component, we configure the MSO7000/DS7000 series with the optional built-in power analysis software. The current power analysis software can complete the power quality analysis and ripple analysis, helping engineers analyze the commonly used power parameters rapidly and accurately, without needing to make tedious configurations manually or do complicated formula calculation.




## ► Remote Control and Offline Analysis Software

The Web Control software and Ultra Scope control analysis software are served as the standard configurations for the MSO7000/DS7000 series. You can use them to migrate the instrument control and waveform analysis to the PC, and then click the mouse to operate easily.


You only need to input the IP address of the oscilloscope into the address bar of the Web browser to open the Web Control software. The display of the waveform interface and instrument control in the software are consistent with that in the MSO7000/DS7000 series. You can use the mouse to tap the keys or knobs in the Web Control interface to complete the waveform control, measurement, and analysis. In the Web Control interface, the basic information of the instrument is displayed, and you can also upload or download the files of the oscilloscope, control with the SCPI commands, set or modify the network status.

The powerful data analysis function of the MSO7000/DS7000 series is not only limited to the oscilloscope itself. The Ultra Scope control analysis software can not only realize the basic control for the instrument, but also can export the 500 M waveform big data to the PC, and then make measurements, math operation, and analysis of the data offline. It also supports real-time monitoring of the oscilloscope status and display in multiple windows with multiple instruments. The available remote control interfaces include USB, LAN, and GPIB, and you can select any one of them to realize remote control.

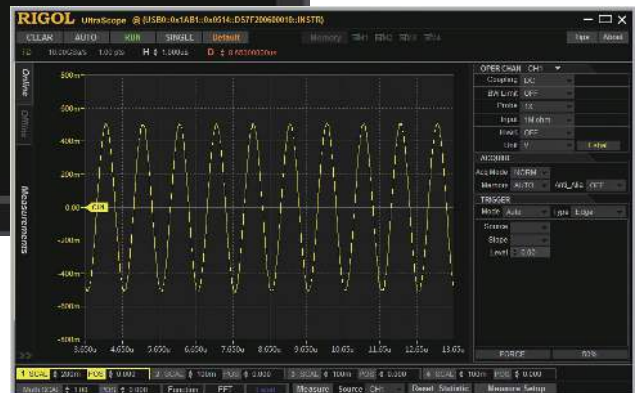

## ► User-defined One-key Quick Operation

There is a dedicated Quick key on the front panel of the MSO7000/DS7000 series, enabling you to customize the function of the key and complete the commonly used operation quickly. With the customized setting of the Quick key, you can quickly capture the screen image, realize waveform saving, setup saving, all measurement, reset measurement statistics, reset pass/fail test statistics, and etc.

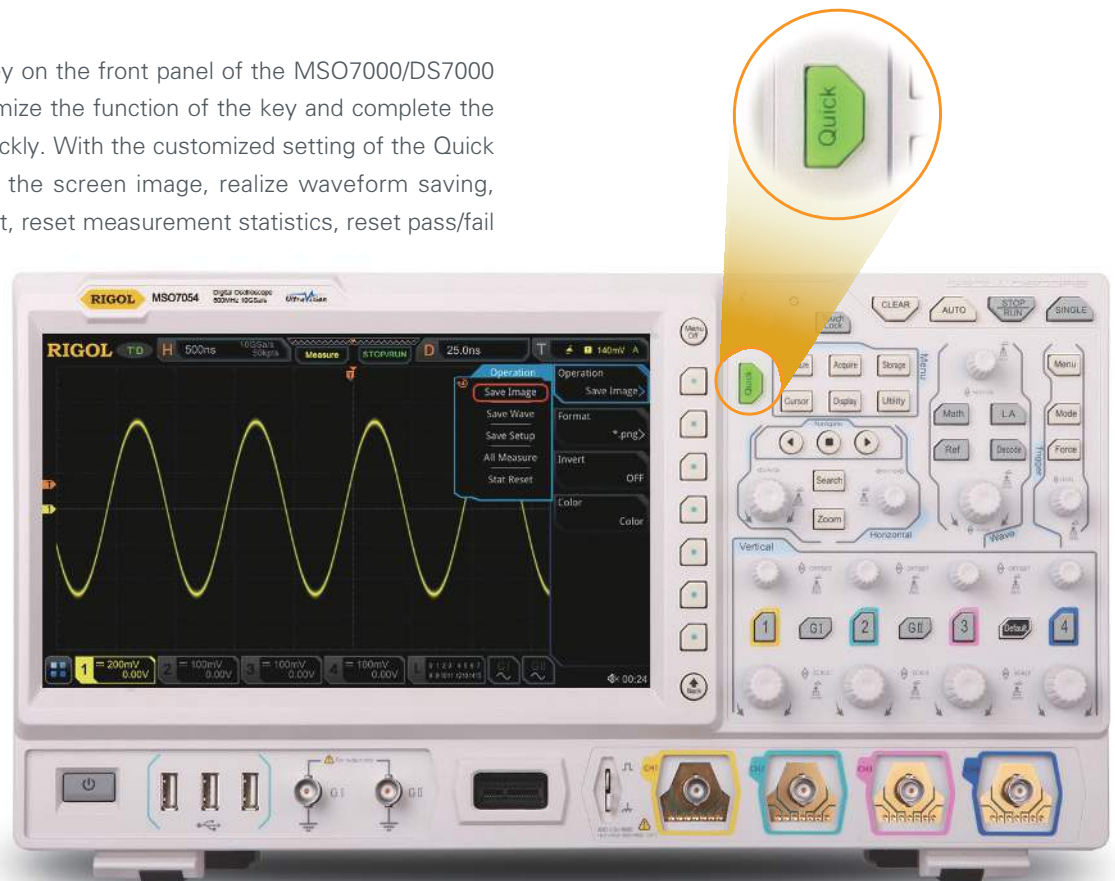










## ► Multiple External Interfaces

The MSO7000/DS7000 series provides a variety of external interfaces, including USB HOST&DEVICE, LAN(LXI), HDMI, TRIG OUT, and USB-GPIB. The oscilloscope is in compliance with the standards specified in LXI Device Specification 2011. It can access to the LXI webpage via the LAN interface. You can purchase the USB-GPIB interface converter from **RIGOL** to enjoy the reliable GPIB communication service. The available HDMI video output interface can transmit the screen display of the oscilloscope to the PC, TV, or projector for view. In addition, the Linux-based MSO7000/DS7000 series also enables you to control the instrument by using the externally connected mouse via the USB interface.



# RIGOL Probes and Accessories Supported by the MSO7000 Series

## • RIGOL Passive Probes

Model	Type	Description	Model	Type	Description
 <p>PVP2150</p>	High-impedance Probe	1X: DC ~ 35 MHz 10X: DC ~ 150 MHz Compatibility: All models of <b>RIGOL</b> 's digital oscilloscopes	 <p>RP1010H</p>	High-voltage Probe	DC ~ 40 MHz DC: 0 ~ 10 kV DC AC: pulse $\leq 20$ kVp-p AC: sine wave $\leq 7$ kVrms Compatibility: All models of <b>RIGOL</b> 's digital oscilloscopes
 <p>PVP2350</p>	High-impedance Probe	1X: DC ~ 35 MHz 10X: DC ~ 350 MHz Compatibility: All models of <b>RIGOL</b> 's digital oscilloscopes	 <p>RP1018H</p>	High-voltage Probe	DC ~ 150 MHz DC+AC Peak: 18 kV CAT II AC RMS: 12 kV CAT II Compatibility: All models of <b>RIGOL</b> 's digital oscilloscopes
 <p>RP3500A</p>	High-impedance Probe	DC ~ 500 MHz Compatibility: All models of <b>RIGOL</b> 's digital oscilloscopes	 <p>RPL2316</p>	Logic Analyzer Probe	Logic analyzer probe (dedicated probe for MSO2000A, MSO4000, and MSO7000 series)
 <p>RP5600A</p>	High-impedance Probe	DC ~ 600 MHz Compatibility: MSO/DS4000, DS6000, MSO7000, and MSO8000 series			
 <p>RP6150A</p>	Low-impedance Probe	DC ~ 1.5 GHz Compatibility: MSO/DS4000, DS6000, MSO7000, and MSO8000 series			
 <p>RP1300H</p>	High-voltage Probe	DC ~ 300 MHz CAT I 2000 V (DC+AC) CAT II 1500 V (DC+AC) Compatibility: All models of <b>RIGOL</b> 's digital oscilloscopes			



• **RIGOL Active and Current Probes**

Model	Type	Description	Model	Type	Description
 RP7150	Single-ended/ Differential Active Probe	BW: DC~1.5 GHz 30 V peak, CAT I Compatibility: MSO/ DS4000 series, DS6000 series, and MSO/DS7000 series oscilloscopes	 RP1004C	Current Probe	BW: DC ~ 100 MHz Maximum Input AC P-P: 50 A (noncontinuous) AC RMS: 30 A Compatibility: All models of <b>RIGOL's</b> digital oscilloscopes Required to order RP1000P power supply.
 RP7080	Single-ended/ Differential Active Probe	BW: DC~0.8 GHz 30 V peak, CAT I Compatibility: MSO/ DS4000 series, DS6000 series, and MSO/DS7000 series oscilloscopes	 RP1005C	Current Probe	BW: DC ~ 10 MHz Maximum Input AC P-P: 300 A (noncontinuous), 500 A (@pulse width ≤ 30 us) AC RMS: 150 A Compatibility: All models of <b>RIGOL's</b> digital oscilloscopes Required to order RP1000P power supply.
 RP7150S	Single-ended Active Probe	BW: DC~1.5 GHz 30 V peak, CAT I Compatibility: MSO/ DS4000 series, DS6000 series, and MSO/DS7000 series oscilloscopes	 RP1000P	Power Supply	Power supply for RP1003C, RP1004C, and RP1005C; supporting 4 channels.
 RP7080S	Single-ended Active Probe	BW: DC~0.8 GHz 30 V peak, CAT I Compatibility: MSO/ DS4000 series, DS6000 series, and MSO/DS7000 series oscilloscopes	 RP1025D	High- voltage Differential Probe	BW: 25 MHz Max. voltage ≤ 1400 Vpp Compatibility: All models of <b>RIGOL's</b> digital oscilloscopes
 RP1001C	Current Probe	BW: DC ~ 300 kHz Maximum Input DC: ± 100 A AC P-P: 200 A AC RMS: 70 A Compatibility: All models of <b>RIGOL's</b> digital oscilloscopes	 RP1050D	High- voltage Differential Probe	BW: 50 MHz Max. voltage ≤ 7000 Vpp Compatibility: All models of <b>RIGOL's</b> digital oscilloscopes
 RP1002C	Current Probe	BW: DC ~ 1 MHz Maximum Input DC: ± 70 A AC P-P: 140 A AC RMS: 50 A Compatibility: All models of <b>RIGOL's</b> digital oscilloscopes	 RP1100D	High- voltage Differential Probe	BW: 100 MHz Max. voltage ≤ 7000 Vpp Compatibility: All models of <b>RIGOL's</b> digital oscilloscopes
 RP1003C	Current Probe	BW: DC ~ 50 MHz Maximum Input AC P-P: 50 A (noncontinuous) AC RMS: 30 A Compatibility: All models of <b>RIGOL's</b> digital oscilloscopes Required to order RP1000P power supply.			

# Specifications

All the specifications are guaranteed except the parameters marked with "Typical" and the oscilloscope needs to operate for more than 30 minutes under the specified operation temperature.

## Overview of the MSO7000/DS7000 Series Technical Specifications

Model	MSO7014	DS7014	MSO7024	DS7024	MSO7034	DS7034	MSO7054	DS7054
Analog Bandwidth	100 MHz		200 MHz		350 MHz		500 MHz	
Rising time (typical)	≤3.5 ns		≤1.75 ns		≤1 ns		≤700 ps	
No. of Input/Output Channels	4 input analog channels							
	1 input EXT channel							
	16 input digital channels (only for the MSO model)							
	dual-channel arbitrary waveform generator output (only for the MSO model, option)							
Sampling Mode	real-time sampling							
Max. Sample Rate of Analog Channel	10 GSa/s (single-channel), 5 GSa/s (half-channel <sup>[1]</sup> ), 2.5 GSa/s (all channels)							
Max. Memory Depth	analog channel: 500 Mpts (single-channel), 250 Mpts (half-channel <sup>[1]</sup> ), 125 Mpts (all channels) digital channel: 62.5 Mpts (all channels)							
Max. Waveform Capture Rate <sup>[2]</sup>	≥600,000 wfms/s							
Hardware real-time waveform recording and playing	≥450,000 wfms (single-channel)							
Peak Detection	under all the time base settings, capture 400 ps glitches							
LCD Size and Type	10.1-inch capacitive multi-touch screen/gesture enabled operation							
Display Resolution	1024 × 600							

## Vertical System Analog Channel

Vertical System Analog Channel		
Input Coupling	DC or AC	
Input Impedance	1 MΩ ± 1%, 50 Ω ± 1%	
Input Capacitance	17 pF ± 3 pF	
Probe Attenuation Coefficient	0.01X, 0.02X, 0.05X, 0.1X, 0.2X, 0.5X, 1X, 2X, 5X, 10X, 20X, 50X, 100X, 200X, 500X, 1000X, 2000X, 5000X, 10000X, 20000X, and 50000X	
Probe Recognition	auto-recognized RIGOL probe	
Maximum Input Voltage	1 MΩ	CAT I 300 Vrms, 400 Vpk, Transient Overvoltage 1600 Vpk
	50 Ω	5 Vrms
Vertical Resolution	8 bits	
Vertical Sensitivity Range <sup>[3]</sup>	1 MΩ	1 mV/div ~ 10 V/div
	50 Ω	1 mV/div ~ 1 V/div
Offset Range	1 MΩ	± 1 V ( 1 mV/div ~ 50 mV/div )
		± 30 V ( 51 mV/div ~ 260 mV/div )
	50 Ω	± 100 V ( 265 mV/div ~ 10 V/div )
		± 1 V ( 1 mV/div ~ 100 mV/div ) ± 4 V ( 102 mV/div ~ 1 V/div )
Dynamic Range	± 5 div (8 bits)	
Bandwidth Limit (Typical)	20 MHz, 250 MHz; selectable for each channel	
DC Gain Accuracy <sup>[3]</sup>	± 2% of full scale	
DC Offset Accuracy	<200 mV/div ( ± 0.1 div ± 2 mV ± 1.5% of offset value)	
	>200 mV/div ( ± 0.1 div ± 2 mV ± 1.0% of offset value)	
Channel-to-Channel Isolation	40dB, from DC to maximum rated bandwidth of each model	
ESD Tolerance	± 8 kV (on input BNCs)	

## Vertical System Digital Channel

Vertical System Digital Channel	
Number of Channels	16 input channels (D0 ~ D15) (D0 ~ D7, D8 ~ D15)
Threshold Range	± 20.0 V, in 10 mV step
Threshold Accuracy	± (100 mV + 3% of the threshold setting)
Threshold Selection	TTL(1.4 V), CMOS5.0(2.5 V), CMOS3.3(1.65 V), CMOS2.5(1.25 V), CMOS1.8(0.9 V), ECL(-1.3 V), PECL(3.7 V), LVDS(1.2 V), and 0.0V User (adjustable threshold for 8 channels in a group)
Max. Input Voltage	± 40 V peak CAT I; transient overvoltage 800 Vpk
Max. Input Dynamic Range	± 10 V + threshold
Minimum Voltage Swing	500 mVpp
Input Impedance	about 101 kΩ
Probe Load	≈ 8 pF
Vertical Resolution	1 bit

## Horizontal System--Analog Channel

Vertical System--Analog Channel					
		100 MHz	200 MHz	350 MHz	500 MHz
Range of Time Base		5 ns/div ~ 1 ks/div	2 ns/div ~ 1 ks/div	1 ns/div ~ 1 ks/div	500 ps/div ~ 1 ks/div
		support fine adjustment			
Time Base Resolution		10 ps			
Time Base Accuracy		± 2 ppm ± 2 ppm/year			
Time Base	before triggering	≥ 1/2 screen width			
Delay Range	after triggering	1 s to 100 div			
Time Interval (ΔT) Measurement		± (1 sample interval) ± (2 ppm × readout) ± 50 ps			
Inter-channel Offset Correction Range		± 100 ns			
Horizontal Mode	YT	Default			
	XY	X = Channel 1, Y = Channel 2			
	SCAN	Time base ≥ 200 ms/div, available to enter or exit the SCAN mode by rotating the Horizontal SCALE knob			
	ROLL	Time base ≥ 200 ms/div, available to enter or exit the SCAN mode by rotating the Horizontal SCALE knob			

## Horizontal System--Digital Channel

Horizontal System--Digital Channel	
Min. Detectable Pulse Width	3.2 ns
Maximum Input Frequency	500 MHz (accurately copied as the sine wave of the maximum frequency of the logic square wave; input amplitude is the minimum swing; the shortest the ground cable is required for the logic probe)
Inter-channel Time Delay	1 ns (typical), 2 ns (maximum)

## Acquisition System

Acquisition System		
Max. Sample Rate of Analog Channel		10 GSa/s (single-channel), 5 GSa/s (half-channel <sup>[1]</sup> ), 2.5 GSa/s (all channels)
Max. Memory Depth of Analog Channel	Standard	100 Mpts (single-channel), 50 Mpts (half-channel <sup>[1]</sup> ), 25 Mpts (all channels)
	2RL (Option)	250 Mpts (single-channel), 125 Mpts (half-channel <sup>[1]</sup> ), 50 Mpts (all channels)
	5RL (Option)	500 Mpts (single-channel), 250 Mpts (half-channel <sup>[1]</sup> ), 125 Mpts (all channels)
Max. Sample Rate of Digital Channel		1.25 GSa/s (all channels)
Max. Memory Depth of Digital Channel		62.5 Mpts (all channels)
Acquisition Mode	Normal	Default
	Peak Detection	capture 400 ps glitches
	Average Mode	2, 4, 8, 16...65536 are available for you to choose, averaging point by point

## Trigger System

Trigger System		
Trigger Source	Analog channel (1 ~ 4), Digital channel (D0 ~ D15), EXT TRIG, and AC Line	
Trigger Mode	Auto, Normal, Single	
Trigger Coupling	DC	DC coupling trigger
	AC	AC coupling trigger
	High Frequency Rejection	High frequency rejection, cut-off frequency ~ 75 kHz (internal only)
	Low Frequency Rejection	Low frequency rejection, cut-off frequency ~ 75 kHz (internal only)
Noise Rejection	increase delay for the trigger circuit (internal only), On/Off	
Holdoff Range	8 ns to 10 s	
Trigger Bandwidth	Internal: analog bandwidth of the oscilloscope	
	External: 200 MHz	
Trigger Sensitivity (Internal)	1 div or 5 mVpp, whichever is larger, <10mV/div	
	0.5 div, $\geq 10\text{mV/div}$ enable the noise rejection, with trigger sensitivity reducing half	
Trigger Sensitivity (External)	200 mVpp, DC ~ 100 MHz	
	500 mVpp, 100 MHz ~ 200 MHz	
Trigger Level Range	Internal:	$\pm 5$ div from the center of the screen
	External	$\pm 8$ V
	AC Line	fixed 50%

## Trigger Type

Trigger Type	
Zone Trigger	Triggers in the rectangle area drawn manually, supporting trigger zone A and trigger zone B. The trigger conditions can be "Intersect" or "Not intersect" Source channel: CH1~CH4; only one analog channel is triggered each time
Trigger Type	Standard: Edge trigger, Pulse trigger, Slope trigger, Video trigger, Pattern trigger, Duration trigger, Timeout trigger, Runt trigger, Window trigger, Delay trigger, Setup/Hold trigger, and Nth Edge trigger Option: RS232, UART, I2C, SPI, CAN, FlexRay, LIN, I2S, and MIL-STD-1553
Edge	Trigger on the threshold of the specified edge of the input signal. The edge types can be Rising, Falling, or Either Source channel: CH1 ~ CH4, D0 ~ D15, EXT, or AC Line
Pulse	Trigger on the positive or negative pulse with a specified width. The pulse width is greater or smaller than a certain value or within a certain time range Source channel: CH1 ~ CH4, D0 ~ D15
Slope	Trigger on the positive or negative slope of the specified time (800 ps ~ 10 s). The slew time is greater or smaller than a certain value or within a certain time range. The channel only supports analog channels Source channel: CH1 ~ CH4
Video	Trigger on all lines, specified line, add field, or even field that conforms to the video standards. The supported video standards include NTSC, PAL/SECAM, 480P, and 576P. The channel only supports analog channels Source channel: CH1 ~ CH4
Pattern	Identify a trigger condition by searching for a specified pattern. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, X, Rising, or Falling Source channel: CH1 ~ CH4, D0 ~ D15
Duration	Trigger when the specified pattern meets the specified duration condition. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, X. The duration is greater or smaller than a certain value, or within a certain time range, or outside a certain time range Source channel: CH1 ~ CH4, D0 ~ D15
Timeout	Trigger when duration of a certain event exceeds the specified time (16 ns ~ 10 s) . The event can be specified as Rising, Falling, or Either Source channel: CH1 ~ CH4, D0 ~ D15
Runt	Trigger when the pulses pass through one threshold but fail to pass through another threshold. The channel only supports analog channels Source channel: CH1 ~ CH4
Window	Trigger in a specified window state when the rising edge of the signal crosses the upper threshold or the falling edge crosses the lower threshold. The window state can be Enter, Exit, or Time. The channel only supports analog channels Source channel: CH1 ~ CH4
Delay	Trigger when the time difference between the specified edges of Source A and Source B meets the preset time. The duration is greater or smaller than a certain value, or within a certain time range, or outside a certain time range Source channel: CH1 ~ CH4, D0 ~ D15
Setup Hold	When the setup time or hold time between the input clock signal and the data signal is smaller than the specified time (8 ns ~ 1 s ) Source channel: CH1 ~ CH4, D0 ~ D15

Nth Edge	Trigger on the Nth edge that appears after the specified idle time. The edge can be specified as Rising or Falling Source channel: CH1 ~ CH4, D0 ~ D15
RS232/UART (Option)	DS7000–COMP option Trigger on the Start, Error, Check Error, or Data frame of the RS232/UART bus (up to 20Mb/s) Source channel: CH1 ~ CH4, D0 ~ D15
I2C (Option)	DS7000–EMBD option Trigger on the Start, Stop, Restart, MissedACK, Address (7 bits, 8 bits, or 10 bits), Data, or Address Data of the I2C bus Source channel: CH1 ~ CH4, D0 ~ D15
SPI (Option)	DS7000–EMBD option Trigger on the specified pattern of the specified data width (4 ~ 32) of SPI bus. CS and Timeout are supported Source channel: CH1 ~ CH4, D0 ~ D15
CAN (Option)	DS7000–AUTO option Trigger on the start of a frame, end of a frame, Remote ID, Overload, Frame ID, Frame Data, Data&ID, Frame Error, Answer Error, Check Error, Format Error, and Random of the CAN signal (up to 5Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF Source channel: CH1 ~ CH4, D0 ~ D15
FlexRay (Option)	DS7000–FLEX option Trigger on the specified position (TSS End, FSS_BSS End, FES End and DTS End), frame (Invalid, Syn, Start and All), symbol (CAS/MTS and WUS), error (Head CRC Err, Tail CRC Err, Decode Err, and Random Err.) of the FlexRay signal (up to 10 Mb/s) Source channel: CH1 ~ CH4, D0 ~ D15
LIN (Option)	DS7000–AUTO option Triggers on the Sync, ID, Data (length settable), Data&ID, Wakeup, Sleep, and Error of the LIN bus signal (up to 20 Mb/s) Source channel: CH1 ~ CH4, D0 ~ D15
I2S (Option)	DS7000–AUDIO option Triggers on 2's complement data of audio left channel, right channel, or either channel (=, ≠, >, <, <>, ><). The available alignment modes include I2S, LJ, and RJ Source channel: CH1 ~ CH4, D0 ~ D15
MIL–STD–1553 (Option)	DS7000–AERO option Triggers on the sync (Data Sync, Cmd Sync, and All Sync) field, Data word, command word, status word, and Error (Sync Error and Check Error) of the MIL–STD–1553 bus Source channel: CH1 ~ CH4

## Search and Navigation

Search, Navigation, and Table	
Type	Edge, Pulse, Runt, Slope, RS232, I2C and SPI
Source	Any analog channel
Copy	Copy the search settings to the trigger settings, and copy from the trigger settings
Result Display	Event table or navigation. Go to the specific event through the event table index
Navigation	Memory playing: view the memory waveforms with the navigation keys by scrolling through stored waveform data, supporting viewing at three speeds
	ZOOM playing: view the details of waveforms with the navigation keys by panning the ZOOM window automatically, supporting viewing at three speeds
	Recording playback: play back the recorded waveforms with the navigation keys
	Event navigation: use the navigation keys to scroll through the event search results

## Waveform Measurement

Waveform Measurement		
Cursor	Number of Cursors	2 pairs of XY cursors
	Manual Mode	Voltage deviation between cursors ( $\Delta Y$ )
		Time deviation between cursors ( $\Delta X$ )
		Reciprocal of $\Delta X$ (Hz) ( $1/\Delta X$ )
	Track Mode	Fix Y-axis to track X-axis waveform point's voltage and time values Fix X-axis to track Y-axis waveform point's voltage and time values
Auto Measurement	Allows to display cursors during auto measurement	
XY Mode	Measures the voltage parameters of the corresponding channel waveforms in XY time base mode. X = Channel 1, Y = Channel 2	

Auto Measurement	Number of Measurements	41 auto measurements; and up to 10 measurements can be displayed at a time
	Measurement Source	CH1 ~ CH4, Math1 ~ Math4, and D0 ~ D15 (only for MSO model)
	Measurement Mode	Normal and Precision (full-memory hardware measurement)
	Measurement Range	Main, Zoom, and Cursor
	All Measurement	Display 33 measurement items for the current measurement channel; the measurement results are updated continuously; you can switch the measurement channel
	Vertical	Vmax, Vmin, Vpp, Vtop, Vbase, Vamp, Vupper, Vmid, Vlower, Vavg, VRMS, Per. VRMS, Overshoot, Preshoot, Area, Period Area, and Std Dev
	Horizontal	Period, Frequency, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Positive Pulse Count, Negative Pulse Count, Rising Edge Count, Falling Edge Count, Tvmax, Tvmin, +Slew Rate, and -Slew Rate
	Others	Delay(A ↑ - B ↑), Delay(A ↑ - B ↓), Delay(A ↓ - B ↑), Delay(A ↓ - B ↓), Phase(A ↑ - B ↑), Phase(A ↑ - B ↓), Phase(A ↓ - B ↑), and Phase(A ↓ - B ↓)
	Analysis	Frequency counter, DVM, power analysis, histogram
Statistics	Current, Average, Max, Min, Standard Deviation, Count Statistical times settable	

## Waveform Calculation

Waveform Calculation		
No. of Math Functions	4; 4 math functions available to be displayed at a time	
Operation	A+B, A-B, A × B, A/B, FFT, A&&B, A  B, A'B, !A, Intg, Diff, Sqrt, Lg, Ln, Exp, Abs, AX+B, LowPass, HighPass, BandPass, and BandStop	
Color Grade	Supporting Math and FFT	
Enhanced FFT	Record Length	Max. 1 Mpts
	Window Type	Rectangular (default), Blackman-Harris, Hanning, Hamming, Flattop, and Triangle
	Peak Search	a maximum of 15 peaks, confirmed by the settable threshold and offset threshold set by users

## Waveform Analysis

Waveform Analysis		
Waveform Recording		Store the signal under test in segments according to the trigger events, i.g. save all the sampled waveform data as a segment to the RAM for each trigger event. The maximum number of the sampled segments reaches 450,000.
	Source	All enabled analog channels and digital channels
Pass/Fail Test	Analysis	Support playing frame by frame or continuous playing; capable of calculating, measuring, and decoding the played waveforms
	Source	Any analog channel
Histogram		The waveform histogram provides a group of data, showing the number of times a waveform hits within the defined region range on the screen. The waveform histogram not only shows the distribution of hits, but also the ordinary measurement statistics
	Source	Any analog channel or auto measurement item
	Type	horizontal, vertical, or measurement
	Measure	sum, peak, max, min, pKpk, mean, median, mode, bin width, and sigma
Color Grade	Mode	Support all modes, except the Zoom, XY, and ROLL modes
		Provide a dimensional view for color grade waveforms
	Source	Any analog channel
	Color Theme	Temperature and intensity
	Mode	Support all modes

## Parallel Decoding

Parallel Decoding	
Number of Decodings	4, four protocol types can be supported at the same time

Decoding Type	Standard: Parallel Option: RS232, UART, I2C, SPI, LIN, CAN, FlexRay, I2S, and MIL-STD-1553
Parallel	Up to 20 bits of Parallel decoding, supporting the combination of any analog channel and digital channel. Support user-defined clock and auto clock settings Source channel: CH1 ~ CH4, D0 ~ D15
RS232/UART	DS7000-COMP option Decode the RS232/UART (up to 20 Mb/s) bus's TX/RX data (5-9 bits), parity (Odd, Even, or None), and stop bits (1-2 bits) Source channel: CH1 ~ CH4, D0 ~ D15
I2C	DS7000-EMBD option Decode the address (with or without the R/W bit) of the I2C bus, data, and ACK Source channel: CH1 ~ CH4, D0 ~ D15
SPI	DS7000-EMBD option Decode the MISO/MOSI data (4-32 bits) of the SPI bus. The available mode includes "Timeout" and "CS" Source channel: CH1 ~ CH4, D0 ~ D15
LIN	DS7000-AUTO option Decode the protocol version (1.X or 2.X) of the LIN bus(up to 20 Mb/s). The decoding displays sync, ID, data, and check sum Source channel: CH1 ~ CH4, D0 ~ D15
CAN	DS7000-AUTO option Decode the remote frame (ID, byte number, CRC), overload frame, and data frame (standard/extended ID, control domain, data domain, CRC, and ACK) of the CAN bus(up to 5Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF Source channel: CH1 ~ CH4, D0 ~ D15
FlexRay	DS7000-FLEX option Decode the frame ID, PL (payload), Header CRC, Cycle Count, Data, Tail CRC, and DTS of the FlexRay bus (up to 10 Mb/s). The supported signal types include BP, BM, and RX/TX Source channel: CH1 ~ CH4, D0 ~ D15
I2S	DS7000-AUDIO option Decode I2S audio bus left channel data and right channel data, supporting 4-32 bits. The alignment modes include I2S, LJ, and RJ Source channel: CH1 ~ CH4, D0 ~ D15
MIL-STD-1553	DS7000-AERO option Decode the MIL-STD-1553 bus signal's data word, command word, and status word (address+last 11 bits) Source channel: CH1 ~ CH4

## Auto

Auto	
AutoScale	Min voltage greater than 5 mVpp, duty cycle 1%, frequency over 35 Hz

## Arbitrary Waveform Generator

Arbitrary Waveform Generator (technical specifications are typical values) (option, only for the MSO model)		
Number of Channels	2	
Output Mode	normal (2-channel output)	
Sample Rate	200 MSa/s	
Vertical Resolution	14 bits	
Max. Frequency	25 MHz	
Standard Waveform	Sine, Square, Ramp, Pulse, DC, Noise	
Built-in Waveform	Sinc, Exp.Rise, Exp.Fall, ECG, Gauss, Lorentz, and Haversine	
Sine	Frequency Range	100 mHz to 25 MHz
	Flatness	± 0.5 dB (relative to 1 kHz)
	Harmonic Distortion	-40 dBc
	Spurious (non-harmonics)	-40 dBc
	Total Harmonic Distortion	1%
	S/N Ratio	40 dB

Square/Pulse	Frequency Range	Square: 100 mHz to 15 MHz Pulse: 100 mHz to 1 MHz
	Rise/Fall Time	<15 ns
	Overshoot	<5%
	Duty	Square: always be 50% Pulse: 10% to 90%, adjustable
	Duty Cycle Resolution	1% or 10 ns (whichever is greater)
	Min. Pulse Width	20 ns
	Pulse Width Resolution	5 ns
	Jitter	500 ps
Ramp	Frequency Range	100 mHz to 100 kHz
	Linearity	1%
Noise	Symmetry	0% to 100%
	Bandwidth	>25 MHz
Built-in Waveform	Frequency Range	100 mHz to 1 MHz
Arbitrary Waveform	Frequency Range	100 mHz to 10 MHz
	Waveform Length	2 ~ 16 kpts
	support loading channel waveforms and stored waveforms	
Frequency	Accuracy	100 ppm (<10 kHz), 50 ppm (>10 kHz)
	Resolution	100 mHz or 4 bits (whichever is greater)
Amplitude	Output Range	20 mVpp ~ 5 Vpp (HighZ), 10 mVpp ~ 2.5 Vpp (50 Ω)
	Resolution	100 uV or 3 bits (whichever is greater)
	Accuracy	2% (1 kHz)
DC Offset	Range	± 2.5 V (HighZ), ± 1.25 V (50 Ω)
	Resolution	100 uV or 3 bits (whichever is greater)
	Accuracy	± 2% of offset setting
Sweep	AM, FM, FSK	
	AM	Modulating Waveforms: Sine, Square, Triangle, and Noise.
		Modulation Frequency: 1 Hz to 50 kHz Modulation Depth: 0% to 120%
	FM	Modulating Waveforms: Sine, Square, Triangle, and Noise.
		Modulation Frequency: 1 Hz to 50 kHz Modulation Offset: 1 Hz to carrier frequency
	FSK	Modulating Waveforms: 50% duty cycle square
Modulation Frequency: 1 Hz to 50 kHz Hopping Frequency: 100 mHz to max. carrier frequency		
Sweep	Linear, Log, and Step	
	Sweep Time	1 ms to 500 s
	Start Frequency and End Frequency	any frequencies within the waveform range
Burst	N Cycle, Infinite	
	Cycle Count	1 to 1000000
	Burst Period	1 μs to 500 s
	Burst Delay	0 s to 100 s
	Trigger Source	Internal, Manual

## Digital Voltmeter

Digital Voltmeter (technical specifications are typical values)	
Source	Any analog channel
Function	DC, AC+DC RMS, and AC RMS
Resolution	ACV/DCV: 3 bits
Limits Beeper	Sound an alarm when the voltage value is within or outside of the limit range.
Range Measurement	Display the latest measurement results in the form of a diagram, and display the extrema over the last 3 seconds

## High-precision Frequency Counter

High-precision Frequency Counter	
Source	Any analog channel, digital channel, and EXT
Measure	frequency, period, totalizer



Counter	Resolution	max. 6 bits, user-defined
	Max. Frequency	max. bandwidth of the analog channel
Totalizer		48-bit totalizer
	Edge	count the number of the rising edges
Time Reference		Internal Reference

## Customization for Quick Key

Customization for Quick Key		
Quick Screenshot		Quickly save the screen image to the specified path based on the current image storage menu settings
Quick Waveform Save		Quickly save the screen or memory waveforms to the specified path based on the current waveform storage menu settings
Quick Save Settings		Quickly save the setup file to the specified path based on the current setup storage menu settings
Quick All Measurement		Display all the prompt message windows for all the measurement of the waveforms.
Quick Reset of Statistics		Quickly reset all the measurement statistics data and measurement counts
		Quickly reset all the statistics information in PassFail function

## Command Set

Command Set		
Common Commands Support		IEEE488.2 Standard
Error Message Definition		Error messages
Support Status Report Mechanism		Status reporting
Support Syn Mechanism		Synchronization

## Display

Display		
LCD		10.1-inch capacitive multi-touch screen/gesture enabled operation
Resolution		1024 × 600 (Screen Region)
Graticule		(10 vertical divisions) × (8 horizontal divisions)
Persistence		Off, Infinite, variable persistence (100 ms to 10 s)
Brightness		256 intensity levels (LCD, HDMI)

## I/O

I/O		
USB 2.0 Hi-speed Host Port		4 (3 on the front panel and 1 on the rear panel)
USB 2.0 Hi-speed Device Port		1 on the rear panel, compatible with USB Test and Measurement Class (USBTMC)
LAN		1 on the rear panel, 10/100/1000-port, supporting LXI-C
GPIB		GPIB-USB adapter (option)
Web Remote Control		Support VNC Web interface (input the IP address of the oscilloscope into the Web browser to display the operation interface of the oscilloscope)
Aux Output		BNC output on the rear panel Vo (H) ≥ 2.5 V open circuit, ≥ 1.0 V 50 Ω to GND Vo (L) ≤ 0.7 V to load ≤ 4 mA; ≤ 0.25 V 50 Ω to GND
	Trig Out	Output a pulse signal when the oscilloscope is triggered
	Pass/Fail	Output a pulse signal when a pass/fail event occurs. Support user-defined pulse polarity and pulse time (100 ns ~ 10 ms)
HDMI video output		1 on the rear panel, HDMI 1.4b, A plug. used to connect to an external monitor or projector
Probe Compensation Output		1 kHz, 3 Vpp square waveform

## Power Supply

Power Supply		
Power Voltage		100 V-240 V, 45 Hz-440 Hz
Power		Max. 200 W (connect to various interfaces, USB, and active probes)
Fuse		3.15 A, T degree, 250 V

## Environment

Environmental Stress		
Temperature Range	Operating	0°C ~ +50°C
	Non-operating	-30°C ~ +70°C
Humidity Range	Operating	below +30°C: ≤95% RH (without condensation)
		+30°C to +40°C, ≤75% RH (without condensation)
	Non-operating	+40°C to +50°C, ≤45% RH (without condensation)
		below 65°C: ≤95% RH (without condensation)
Altitude	Operating	below 3,000
	Non-operating	below 15,000

## Warranty and Calibration Interval

Warranty and Calibration Interval	
Warranty	3 years
Recommended Calibration Interval	18 months

## Regulations

Regulations		
Electromagnetic Compatibility	Compliant with EMC DIRECTIVE 2014/30/EU, compliant with or higher than the standards specified in IEC 61326-1:2013/EN 61326-1:2013 Group 1 Class A CISPR 11/EN 55011	
	IEC 61000-4-2:2008/EN 61000-4-2	± 4.0 kV (contact discharge), ± 8.0 kV (air discharge)
	IEC 61000-4-3:2002/EN 61000-4-3	3 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)
	IEC 61000-4-4:2004/EN 61000-4-4	1 kV power line
	IEC 61000-4-5:2001/EN 61000-4-5	0.5 kV (phase-to-neutral voltage); 1 kV (phase-to-earth voltage); 1 kV (neutral-to-earth voltage)
	IEC 61000-4-6:2003/EN 61000-4-6	3 V, 0.15-80 MHz
	IEC 61000-4-11:2004/EN 61000-4-11	voltage dip: 0% UT during half cycle; 0% UT during 1 cycle; 70% UT during 25 cycles short interruption: 0% UT during 250 cycles
Safety	IEC 61010-1:2010 (Third Edition)/EN 61010-1:2010, UL 61010-1:2012 R4.16 and CAN/CSA-C22.2 NO. 61010-1-12+ GI1+ GI2	
Vibration	Meets GB/T 6587; class 2 random Meets MIL-PRF-28800F and IEC60068-2-6; class 3 random	
Shock	Meets GB/T 6587-2012; class 2 random Meets MIL-PRF-28800F and IEC60068-2-27; class 3 random (in non-operating conditions: 30 g, half sine, 11 ms duration, 3 vibrations along the main axis, a total of 18 vibrations)	

## Mechanical Characteristics

Mechanical Characteristics		
Dimensions <sup>[4]</sup>	410 mm (W) × 224 mm (H) × 135 mm (D)	
Weight <sup>[5]</sup>	Package Excluded	<3.9 kg
	Package Included	<7.1 kg
Rack Mount Kit	6U	

## Non-volatile Memory

Non-volatile Memory		
Data/File Storage	Setup/Image	setup (*.stp), image (*.png, *.bmp, *.tif, *.jpg)
	Waveform Data	CSV waveform data (*.csv), binary waveform data (*.bin, *.wfm), list data (*.csv), reference waveform data (*.ref, *.csv, *.bin), arbitrary waveform data (*.arb)
Reference Waveform	Display 10 internal waveforms, and its storage is limited by the capacity	
Setting	Storage is limited by the capacity	
USB Capacity	Support the USB storage device that conforms to the industry standard	

Note[1]: Half-channel mode: CH1 and CH2 are considered as a group; CH3 and CH4 are considered as another group. Each group share the sample rate 5 GSa/s, and either one of the channels in each group is enabled.

Note[2]: Maximum value. single-channel, 10 ns horizontal time base, input amplitude 4 div, sine wave signal with 10 MHz frequency. Others are default settings.

Note[3]: 1 mV/div and 2 mV/div are a magnification of 4 mV/div setting. For vertical accuracy calculations, use full scale of 32 mV for 1 mV/div and 2 mV/div sensitivity setting.

Note[4]: Supporting legs and handle folded, knob height included, front protective cover excluded.

Note[5]: MS07000 model, standard configuration.

# Order Information

Order Information	Order No.
<b>Model</b>	
MSO7054 (500 MHz, 10 GSa/s, 100 Mpts, 4+16 CH MSO)	MSO7054
MSO7034 (350 MHz, 10 GSa/s, 100 Mpts, 4+16 CH MSO)	MSO7034
MSO7024 (200 MHz, 10 GSa/s, 100 Mpts, 4+16 CH MSO)	MSO7024
MSO7014 (100 MHz, 10 GSa/s, 100 Mpts, 4+16 CH MSO)	MSO7014
DS7054 (500 MHz, 10 GSa/s, 100 Mpts, 4CH DS)	DS7054
DS7034 (350 MHz, 10 GSa/s, 100 Mpts, 4CH DS)	DS7034
DS7024 (200 MHz, 10 GSa/s, 100 Mpts, 4CH DS)	DS7024
DS7014 (100 MHz, 10 GSa/s, 100 Mpts, 4CH DS)	DS7014
<b>Standard Accessories</b>	
Power cord conforming to the standard of the destination country	–
USB cable	CB-USBA-USBB-FF-150
4 passive probes (500 MHz)	RP3500A
1 logic analyzer probe (only for MSO model)	RPL2316
Front panel cover	DS7000-FPC
Quick guide (hard copy)	–
<b>Recommended Accessories</b>	
Active differential probe (1.5 GHz BW)	RP7150
Active differential probe (800 MHz BW)	RP7080
Active single-ended probe (1.5 GHz BW)	RP7150S
Active single-ended probe (800 MHz BW)	RP7080S
Rack mount kit	RM6041
USB-GPIB interface converter	USB-GPIB
Near-field probe	NFP-3
Power analysis phase difference correction jig	RPA246
Digital oscilloscope demonstration plate	DK-DS6000
<b>Bandwidth Upgrade Option</b>	
Bandwidth upgrades from 100 MHz to 200 MHz	DS7000-BW1T2
Bandwidth upgrades from 100 MHz to 350 MHz	DS7000-BW1T3
Bandwidth upgrades from 100 MHz to 500 MHz	DS7000-BW1T5
Bandwidth upgrades from 200 MHz to 350 MHz	DS7000-BW2T3
Bandwidth upgrades from 200 MHz to 500 MHz	DS7000-BW2T5
Bandwidth upgrades from 350 MHz to 500 MHz	DS7000-BW3T5
<b>Memory Depth Option</b>	
Maximum memory depth up to 250 Mpts	DS7000-2RL
Maximum memory depth up to 500 Mpts	DS7000-5RL
<b>Bundle Option</b>	
Function and application bundle option, including DS7000-COMP, DS7000-EMBD, DS7000-AUTO, DS7000-FLEX, DS7000-AUDIO, DS7000-AERO, MSO7000-AWG, and DS7000-PWR	DS7000-BND
<b>Serial Protocol Analysis Option</b>	
PC serial bus trigger and analysis (RS232/UART)	DS7000-COMP
Embedded serial bus trigger and analysis (I2C, SPI)	DS7000-EMBD
Auto serial bus trigger and analysis (CAN, LIN)	DS7000-AUTO
FlexRay serial bus trigger and analysis (FlexRay)	DS7000-FLEX
Audio serial bus trigger and analysis (I2S)	DS7000-AUDIO
MIL-STD-1553 serial bus trigger and analysis (MIL-STD-1553)	DS7000-AERO
<b>Measurement Application Option</b>	
Dual-channel 25 MHz arbitrary waveform generator (only for MSO model)	MSO7000-AWG
Built-in power analysis	DS7000-PWR

Note: For all the mainframes, accessories and options, please contact the local office of **RIGOL**.

## Warranty Period

Three years for the mainframe, excluding the probes and accessories

**HEADQUARTER**

**RIGOL TECHNOLOGIES, INC.**  
No.8 Keling Road, New District,Suzhou,  
JiangSu,P.R.China  
Tel:+86-400620002  
Email:info@rigol.com

**EUROPE**

**RIGOL TECHNOLOGIES EU GmbH**  
Lindbergh str. 4  
82178 Puchheim  
Germany  
Tel: 0049-89/89418950  
Email: info-europe@rigol.com

**NORTH AMERICA**

**RIGOL TECHNOLOGIES, USA INC.**  
8140 SW Nimbus Ave.  
Beaverton, OR 97008  
Tel: 877-4-**RIGOL**-1  
Fax: 877-4-**RIGOL**-1  
Email: info@rigol.com

**JAPAN**

**RIGOL TECHNOLOGIES JAPAN, LLC**  
MJ Bldg. 3F, 1-7-4 Minato, Chuou-ku,  
Tokyo, Japan 104-0043  
Tel: +81-3-6262-8932  
Fax: +81-3-6262-8933  
Email: info-japan@rigol.com

**RIGOL**<sup>®</sup> is the registered trademark of **RIGOL** Technologies, Inc. Product information in this document subject to update without notice. For the latest information about **RIGOL**'s products, applications and services, please contact local **RIGOL** office or access **RIGOL** official website: [www.rigol.com](http://www.rigol.com)