

-				
<u> </u>	<u>ر</u> ی	 	<b>O</b>	0



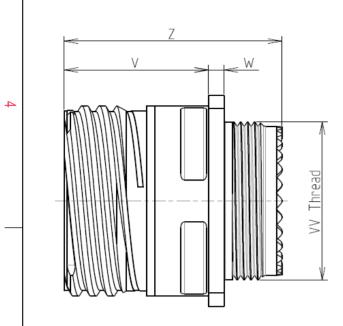



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray

: 15.71 g ± 10%

8D 0

G

13

F

04

Ρ


F

А

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 23.01 R1 20.62 R2 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M18x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

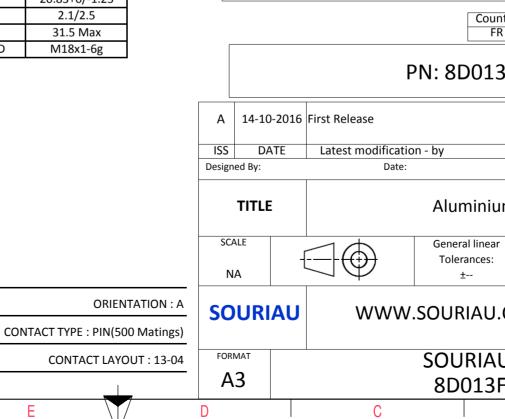

	ω		Þ		
					4
AS EXAM	IPLE				3
s which o er of the	does not co Parties or b technical no Jurisd	by a third par			2
um Re	eceptacl		R DRAWING ES	MOD N°	
ar	Receptacle 8D series NPRDS / PROJECT				
	,		59		1
J.CON	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	RG N° PA-C			SHEET	
	B		A		J

-	т	G	н <b>т</b>	m		0	
		Contact Layout					Panel Cutout
4		$X_{1} \begin{pmatrix} & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & $			ħ	SQUARE FLANGE RECEPTACLE (TYPE ( REAR MOUNTING	
	Conta position A B C D Shell Arrangement No. 13 -4	n ID         (mm)         (mm)           +.000 (0.00)         +.150 (3.81)           +.146 (3.71)         +.035 (0.89)           +.000 (0.00)        083 (2.11)          146 (3.71)         +.035 (0.89)			₩		
cى						Ø Ø/ R	MAAA
	-					SOURIAU shall not be	e liable for any
						due to a use of the the Specifications issue (professional r	e Products whi ed by either of recommendation
N						PN:	Country FR 8D013F
					A 14-10-20 ISS DATE	16 First Release	/
					Designed By: TITLE	Date:	luminium
<u> </u>					SCALE NA		eneral linear Tolerances: ±
					SOURIA	U WWW.SO	URIAU.C
					FORMAT A3		DURIAU 3D013F0
L	Н	G	F	E	D	С	

