


SPECIFICATION CONTROL DRAWING			5012W5812
<b>CHEMINAX</b>	50 OHM, AWG 12, 7 STRANDS OF AWG 20, WATERBLOCKED, OPTIMIZED SHIELD, TRIAXIAL CABLE	Date	2-25-13
		Revision	R
THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.			
CONSTRUCTION DETAILS		ELECTRICAL CHARACTERISTICS	
DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED. 		CHARACTERISTIC IMPEDANCE 50 ± 2 ohms, Method A CAPACITANCE 27.0 pF/ft. (nominal) 30.0 pF/ft. (maximum) VELOCITY OF PROPAGATION 78% (nominal) ATTENUATION (maximum) 0.7 dB/100 ft. at 10 MHz 2.3 dB/100 ft. at 100 MHz 5.4 dB/100 ft. at 400 MHz 9.2 dB/100 ft. at 1000 MHz SURFACE TRANSFER IMPEDANCE 700 milliohms/meter (maximum) at .1 MHz - 1 GHz EMP RESPONSE (2ND SHIELD) 60.0 dB (minimum) for 1 meter	
<b>CONDUCTOR</b> AWG 12, 7 Strands of AWG 20, Silver-Coated Copper DIMENSION: .0890		<b>ADDITIONAL REQUIREMENTS</b>	
<b>DIELECTRIC</b> Rayfoam L Color - Natural DIMENSION: .239			
<b>1ST SHIELD</b> AWG 34, Silver-Coated Copper DIMENSION: .265 Water Sealant filling shield interstices		<b>ELECTRICAL</b> CONDUCTOR RESISTANCE 1.9 ohms/1000 ft. (nominal) INSULATION RESISTANCE (DIELECTRIC) 10,000 megohms (minimum) for 1000 ft. JACKET FLAWS SPARK TEST 1.0 kV (rms) IMPULSE TEST 6.0 kV (peak) VOLTAGE WITHSTAND (DIELECTRIC) CONDUCTOR TO SHIELD 1500 volts (rms) (minimum) SHIELD TO SHIELD 500 volts (rms) (minimum)	
<b>WATERBLOCK LAYER</b> Non-Woven Polyester		<b>ENVIRONMENTAL</b> FLAMMABILITY Method B HEAT SHOCK 225°C LOW TEMPERATURE-COLD BEND -30°C/12.00 inch mandrel	
<b>1ST JACKET</b> Zerohal Color - Black DIMENSION: .323		<b>PHYSICAL</b> INSULATION (DIELECTRIC) ELONGATION 50% (minimum) TENSILE STRENGTH 1000 lbf/in <sup>2</sup> (minimum) 2ND JACKET ELONGATION 150% (minimum) TENSILE STRENGTH 1200 lbf/in <sup>2</sup> (minimum)	
<b>2ND SHIELD</b> AWG 34, Silver-Coated Copper Optimized DIMENSION: .349 Water Sealant filling shield interstices		1ST SHIELD COVERAGE 90% (minimum) 2ND JACKET THICKNESS .043 inch (nominal) WRAP (EACH) .006 inch thick (nominal)	
<b>WATERBLOCK LAYER</b> Non-Woven Polyester		WEIGHT 147. lbs/1000 ft. (nominal)	
<b>2ND JACKET</b> Zerohal DIMENSION: .450 ± .010		Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.	
Outer jacket color will be black (designated by a "-0" appended to the part number, e.g. 5012W5812-0) unless otherwise specified.		Page 1 of 1 Rayfoam, Zerohal, Cheminax, Raychem, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.	
Designate outer jacket color with a dash number in accordance with MIL-STD-681. Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.			

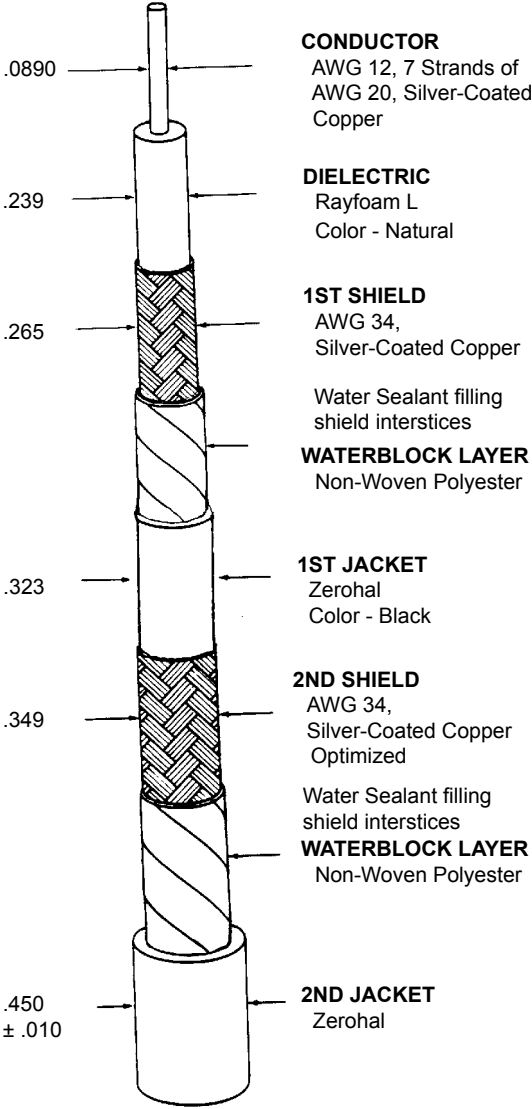

Raychem Wire & Cable  
 501 Oakeside Avenue  
 Redwood City, California 94063-3800  
 1-800-227-8816 Fax: 1-650-361-6297

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

© 2005- 2013 Tyco Electronics Corporation, All rights reserved.