
Dimensions: [mm]

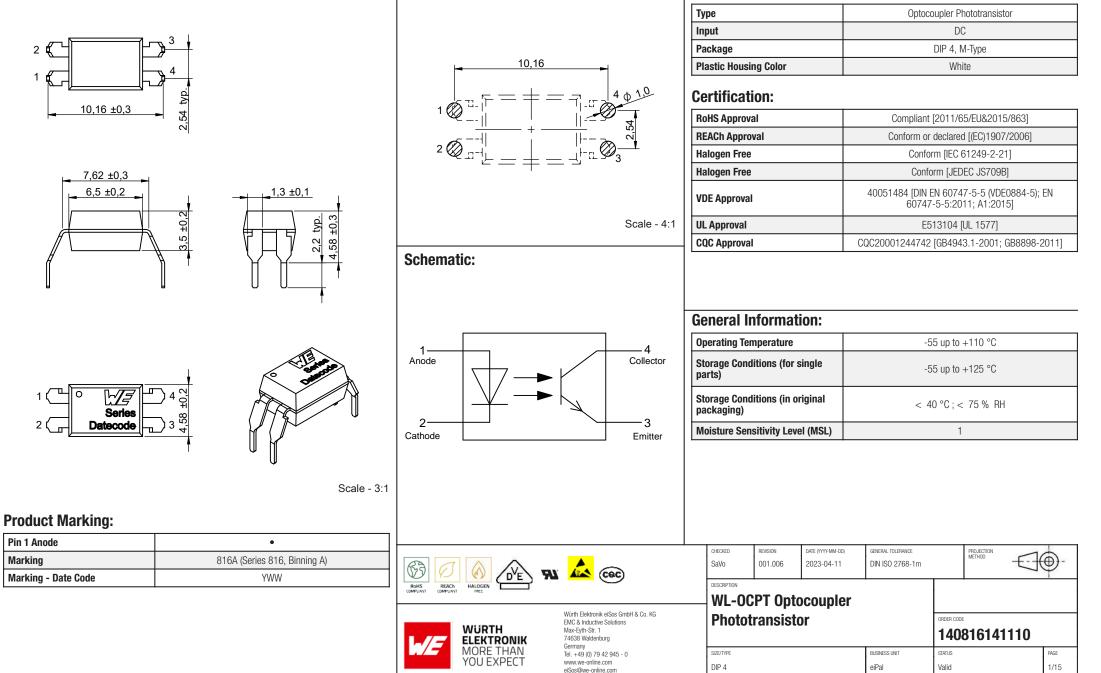

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Recommended Hole Pattern: [mm]

General Properties:

Absolute Maximum Ratings Input Properties (Ambient Temperature 25 °C unless otherwise specified):

Properties		Test conditions	Value	Unit
Forward Current	I _{F max.}		60	mA
Peak Forward Current	I _{F Peak}	duty/ 100 @ 100 Hz	1	А
Input Power Dissipation	P _I		100	mW
Reverse Voltage	V _{REV}		6	V

Absolute Maximum Ratings Output Properties: (Ambient Temperature 25 °C unless otherwise specified):

Properties		Value	Unit
Collector Emitter Voltage	V _{CE}	80	V
Emitter Collector Voltage	V _{EC}	7	V
Collector Current	I _{CE.P}	50	mA
Output Power Dissipation	P ₀	150	mW

Absolute Maximum Ratings Common Properties:

Properties		Test conditions	Value	Unit	
Power Dissipation ¹⁾	P_{Diss}		200	mW	
Isolation Voltage	V _{ISO}	AC for 1 Minute, RH 40~60 %	5000	V (RMS)	

¹⁾ Total power dissipation of the whole component

Electrical & Optical Input Properties:

Drepartico	Test conditions		Value			
Properties			typ.	max.	Unit	
Forward Voltage	V _F	I _F = 10 mA	1.24	1.4	V	
Reverse Current	I _{REV}	$V_{REV} = 6 V$		10	μA	
Input Capactiance	C _{in}	V = 0 V f = 1 kHz	10		pF	

Electrical & Optical Output Properties:

Properties		Test conditions	Value			
rioperues			min.	max.	Unit	
Collector-Emitter Dark Current	I _{CEO.Dark}	$\begin{array}{l} V_{CE} = 20 \ V \\ I_F = 0 \end{array}$		100	nA	
Collector-Emitter Breakdown Voltage	V _{(BR)CE}	$\begin{array}{l} I_{C}=100 \ \mu A \\ I_{F}=0 \end{array}$	80		V	
Emitter-Collector Breakdown Voltage	V _{(BR)EC}	$\begin{array}{l} I_E = 100 \ \mu A \\ I_F = 0 \end{array}$	7		V	

Electrical & Optical Transfer Properties:


Drepartice		Test conditions		Value		Unit
Properties		Test conditions	min.	typ.	max.	
Current Transfer Ratio	CTR	$I_{\rm F}=5~{\rm mA}$ $V_{\rm CE}=5~{\rm V}$	80		160	%
Collector-Emitter Saturation Voltage	V _{CEsat}	$I_F = 20 \text{ mA}$ $I_C = 1 \text{ mA}$		0.06	0.2	V
Rise Time	t _r	$\begin{array}{l} V_{CE}=2~V\\ I_{C}=2~mA\\ R_{L}=100~\Omega \end{array}$		3	18	μs
Fall Time	t _f	$\begin{array}{l} V_{CE}=2~V\\ I_{C}=2~mA\\ R_{L}=100~\Omega \end{array}$		4	18	μs
Cut-Off Frequency	f _c	$\begin{array}{l} V_{CE}=5 \ V \\ I_{C}=2 \ mA \\ R_{L}=1 \ k\Omega \\ -3 \ dB, \ Bin \ B \end{array}$		80		kHz
Floating Capacitance	C _{IO}	V = 0 V f = 1 MHz		0.4		рF
Isolation Resistance	R _{ISO}	DC = 500 V 40~60 % R.H.	1	100		TΩ

	RI <u>&</u> @©	CHECKED SaVo	REVISION 001.006	DATE (YYYY-MM-DD) 2023-04-11	GENERAL TOLERANCE DIN ISO 2768-1 m		PROJECTION METHOD]@ -
ROHS COMPLAVIT COMPLAVIT HALOGEN	Referse REACD COMPLANT COMPLANT HILDGEN WURTH ELEKTRONIK WITH Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74/38 Waldenburg		PT Opto					
ELEKTRONIK			ransisto	or		ORDER CODE 1408	816141110	
MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE DIP 4			BUSINESS UNIT eiPal	status Valid		PAGE 2/15

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc... Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.


Total Power Dissipation vs. Ambient Temperature:

Collector Dark Current vs. Ambient Temperature:

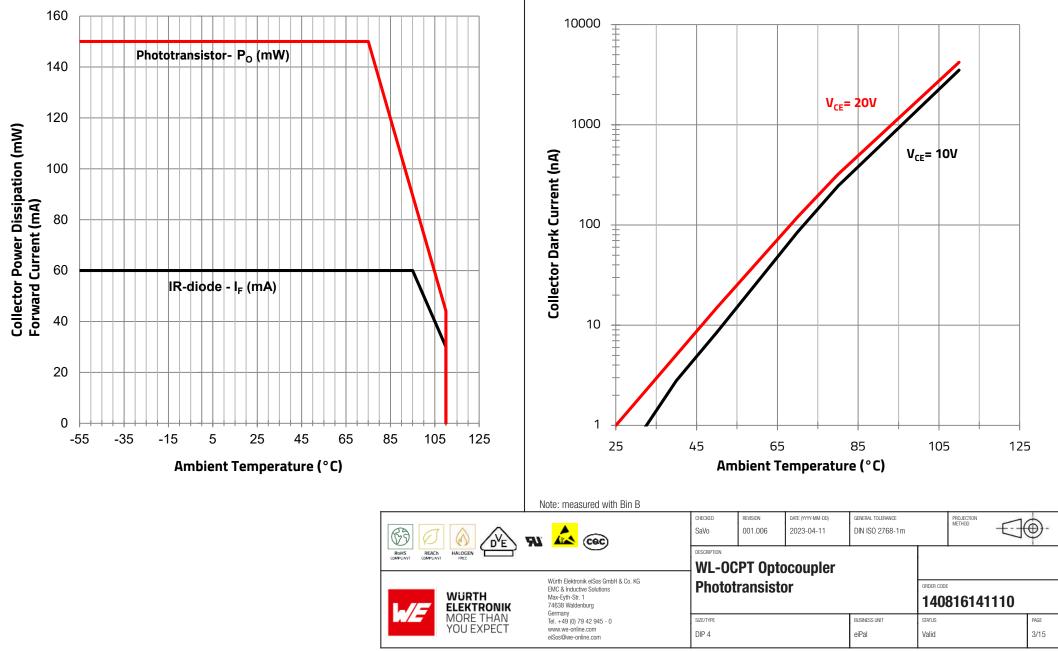

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that rule and reliability and reliability introducts or performance.


Absolute CTR vs. Ambient Temperature

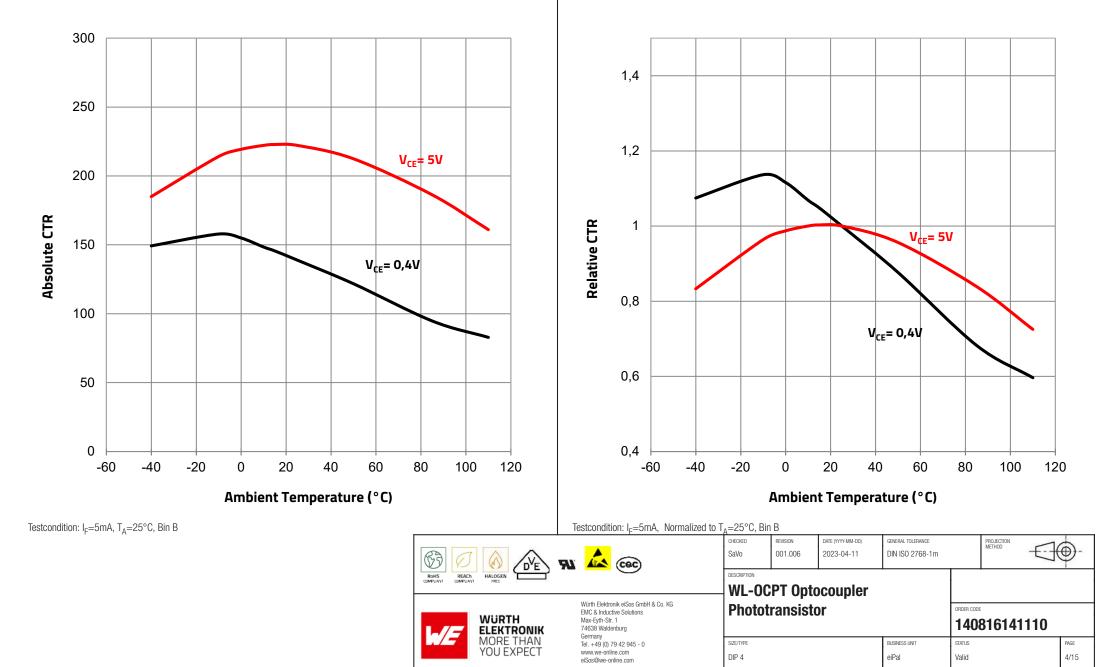

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Relative CTR vs. Ambient Temperature:

Collector-Emitter Saturation Voltage vs. Ambient Temperature:

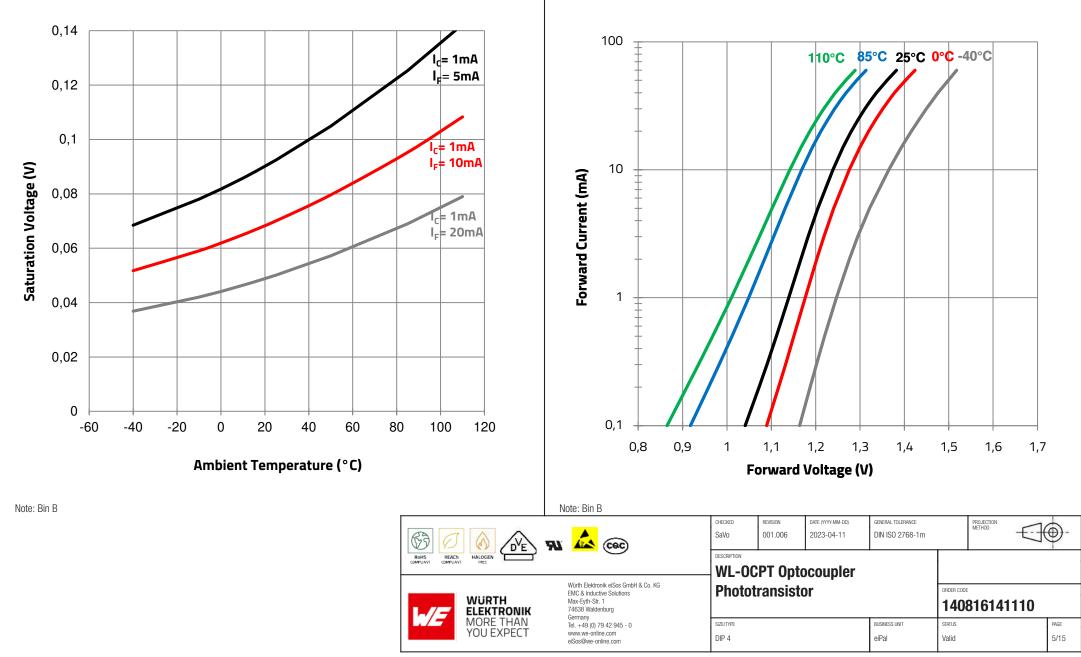

Forward Current vs. Forward Voltage:

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic aircuits that that quirt high safety and reliability information.

Collector Current vs. Collector-Emitter Voltage:

100 10 IF=10mA 8 10 Collector Current (mA) IF= 5mA IF=1mA Collector Current (mA) 6 IF=2mA IF=5mA IF=10mA IF=20mA IF=2mA IF=50mA 2 IF= 1mA IF=0.5mA 0,1 0 0,1 10 1 0.1 0,2 0,3 0 0,4 Collector-Emitter Voltage (V) Collector-Emitter Voltage (V) Testcondition T_A=25°C, Bin B Testcondition T_A=25°C, Bin B CHECKED REVISION DATE (YYYY-MM-DD) GENERAL TOLERANCE PROJECTION METHOD \oplus G SaVo 001.006 2023-04-11 DIN ISO 2768-1m A. Cec D'E 717 DESCRIPTION RoHS COMPLIANT REACH HALOGEN **WL-OCPT Optocoupler** Würth Elektronik eiSos GmbH & Co. KG **Phototransistor** ORDER CODE EMC & Inductive Solutions WÜRTH Max-Eyth-Str. 1 140816141110

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

ELEKTRONIK

MORE THAN YOU EXPECT

74638 Waldenburg

www.we-online.com

eiSos@we-online.com

Tel. +49 (0) 79 42 945 - 0

SIZE/TYPE

DIP 4

STATUS

Valid

PAGE

6/15

BUSINESS UNIT

eiPal

Germany

Collector Current vs. Collector-Emitter Voltage, saturated



Absolute CTR (%)

450 1,4 Bin A Bin A Bin B Bin B 400 Bin C -Bin C 1,2 Bin D Bin D 350 1 300 0,8 250 **Relative CTR** 200 0,6 150 0,4 100 0,2 50 0 0 0,1 10 0,1 10 1 1 Forward Current (mA) Forward Current (mA) Testcondition T_Δ=25°C Testcondition T_A=25°C CHECKED REVISION DATE (YYYY-MM-DD) GENERAL TOLERANCE PROJECTION METHOD G SaVo 001.006 2023-04-11 DIN ISO 2768-1m Cec JR DE DESCRIPTION RoHS COMPLIANT REACh HALOGEN **WL-OCPT Optocoupler** Würth Elektronik eiSos GmbH & Co. KG **Phototransistor** ORDER CODE EMC & Inductive Solutions WÜRTH Max-Eyth-Str. 1 140816141110 74638 Waldenburg ELEKTRONIK Germany MORE THAN YOU EXPECT SIZE/TYPE STATUS Tel. +49 (0) 79 42 945 - 0 BUSINESS UNIT PAGE

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

www.we-online.com

eiSos@we-online.com

DIP 4


eiPal

Valid

7/15

Relative CTR vs. Forward Current (at V_{CF} =5 V)


Absolute CTR vs. Forward Current (at $V_{CE}=0,4$ V)

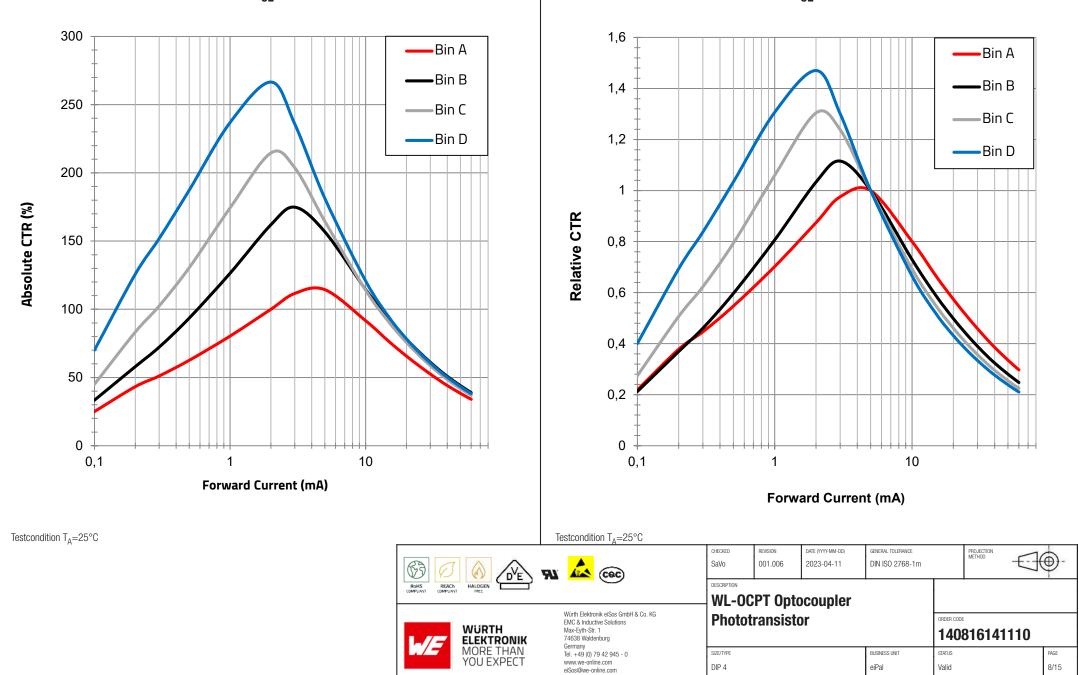

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Relative CTR vs. Forward Current (at V_{CF}=0,4 V)

Switching time vs. Load Resistance:

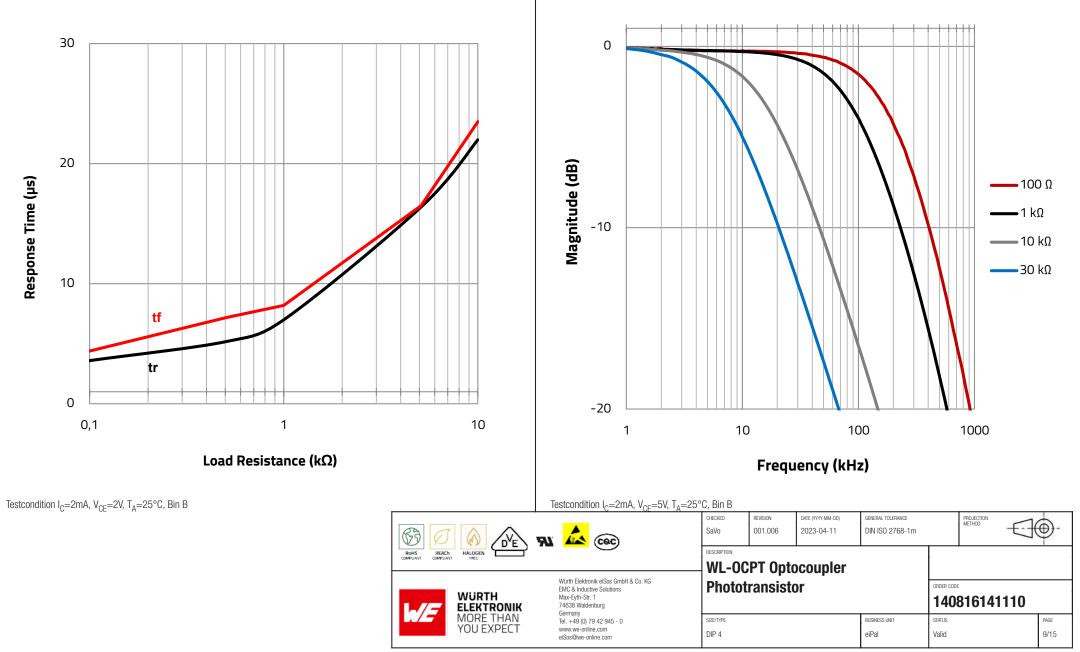


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Gain vs. Frequency:



_ (mm)

typ. 500,00

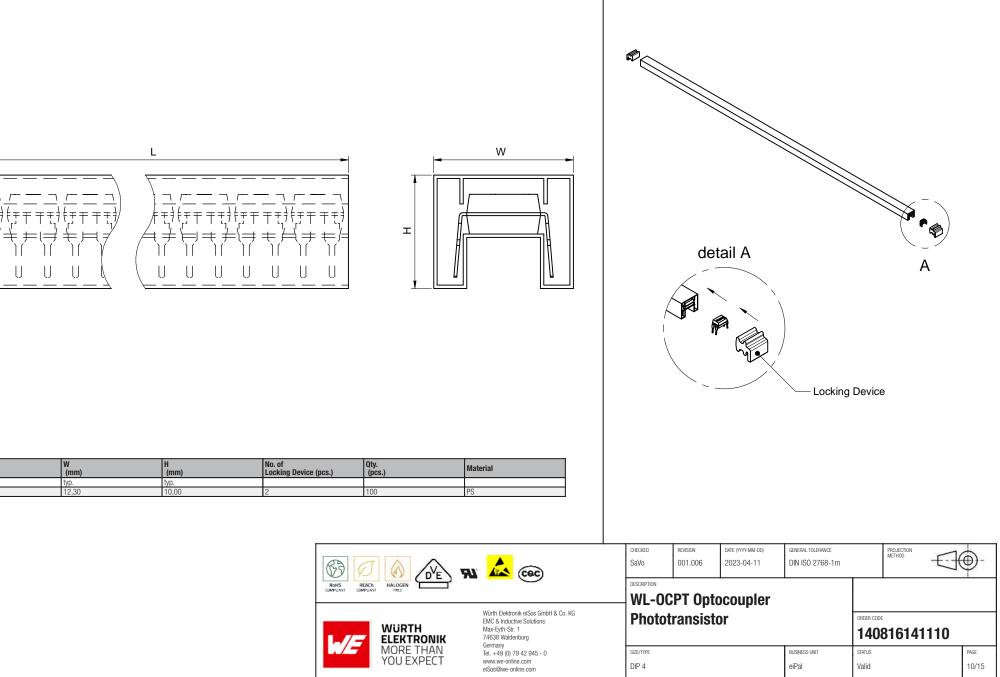

Packaging Specification - Tube: [mm]

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Packaging Specification - Outer Carton: [mm]

ESD-Bag						
Lic (mm) Wic (mm) Hic (mm) typ. typ. typ. 525,00 107,00 47,00	No. of Oty. Tube (pcs.) (pcs.)	Material Lc (m) (m) Description	. typ. typ.	o. of ner Carton (pcs.)	Qty. Material	
525,00 107,00 47,00	32 (3200 Red COMPLAY COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY REL COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLAY COMPLA	Wirth Elektronik elSos GmbH & Co. KG	5,00 235,00 255,00 10 CHEOKED REVISION DATE (YYYY MM-00) SaVo 001.006 2023-04-11 DESCRIPTION WL-OCPT Optocoupler Phototransistor SIZE/TYPE DIP 4	GENERAL TOLERANCE DIN ISO 2768-1m BUSINESS UNIT eiPal		Э- жее 11/15

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

Classification Wave Soldering Profile:



---- max temperature procedure

Classification Wave Soldering Profile:

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly
Preheat Temperature Min	T _{s min}	100 °C	100 °C
Preheat Temperature Typical	T _{s typical}	120 °C	120 °C
Preheat Temperature Max	T _{s max}	130 °C	130 °C
Preheat Time ${\rm t_s}$ from ${\rm T_s}_{\rm min}$ to ${\rm T_s}_{\rm max}$	t _s	70 seconds	70 seconds
Ramp-up Rate	ΔT	150 °C max.	150 °C max.
Peak Temperature	Т _р	245 °C - 260 °C	235 °C - 260 °C
Time of actual peak temperature	tp	5-8 seconds max.	3-6 seconds max.
Ramp-down Rate, Min		~ 2 K/ second	~ 2 K/ second
Ramp-down Rate, Typical		~ 3.5 K/ second	~ 3.5 K/ second
Ramp-down Rate, Max		~ 5 K/ second	~ 5 K/ second
Time 25 °C to 25 °C		4 minutes	4 minutes
Applied cycles		1 cycle max.	

refer to EN61760-1:2006

			SaVo 001.006 2023-04-11 DIN ISO 2768-1m DESCRIPTION WL-OCPT Optocoupler)-
	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germanv		transist	-		ORDER COD	816141	1110	
MORE THAN YOU EXPECT	Tell. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	size/type DIP 4			business unit eiPal	status Valid			PAGE 12/15

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

Cautions and Warnings:

The following conditions apply to all goods within the product series of Optoelectronic Components of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This optoelectronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
 equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
 ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
 especially required and/or if there is the possibility of direct damage or human injury.
- Optoelectronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The optoelectronic component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products also apply to customer specific products.
- Unless Würth Elektroik has given its express consent, the customer is under no circumstances entitled to reverse engineer, disassemble
 or otherwise attempt to extract knowledge or design information from the optoelectronic component.

Product specific:

Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk
- The soldering pad pattern shown above is a general recommendation for the easy assembly of optoelectronic components. If a high degree of precision is required for the selected application (i.e. high density assembly), the customer must ensure that the soldering pad pattern is optimized accordingly.

Cleaning and Washing:

Washing agents used during the production to clean the customer application might damage or change the characteristics of the
optoelectronic component body, marking or plating. Washing agents may have a negative effect on the long-term functionality of the
product.

• Using a brush during the cleaning process may break the optoelectronic component body. Therefore, we do not recommend using a brush during the PCB cleaning process.

Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the optoelectronic component body, pins or termination. Expansion could
damage the components. We recommend a manual inspection after potting to avoid these effects.

Storage Conditions:

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the optoelectronic component to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- For a moisture sensitive component, the storage condition in the original packaging is defined according to IPC/JEDEC-J-STD-033. It is
 also recommended to return the optoelectronic component to the original moisture proof bag and reseal the moisture proof bag again.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

Packaging:

• The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

Handling:

- · Violation of the technical product specifications such as exceeding the nominal rated current, will void the warranty.
- The product design may influence the automatic optical inspection.
- Certain optoelectronic component surfaces consist of soft material. Pressure on the top surface has to be handled carefully to prevent
 negative influence to the function and reliability of the optoelectronic components.
- ESD prevention methods need to be applied for manual handling and processing by machinery.
- Resistors for protection are obligatory.
- In addition to optoelectronic components testing, products incorporating these devices have to comply with the safety precautions given in IEC 60825-1, IEC 62471 and IEC 62778.

Technical specification:

The typical and/or calculated values and graphics of technical parameters can only reflect statistical figures. The actual parameters of
each single product, may differ from the typical and/or calculated values or the typical characteristic line.

			CHECKED SaVo	REVISION 001.006	DATE (YYYY-MM-DD) 2023-04-11	general tolerance DIN ISO 2768-1m		PROJECTION METHOD -		#2
			WL-OCPT Optocoupler							
	Würth Elektronik eißas GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg		Photot	ransisto	r		ORDER CODE 140816141110			_
L/F		Max-Eyth-Str. 1		ianoiott	,,		140	8161411 ⁻	0	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that and reliability indications or performance.

- In the characteristics curves, all values given in dotted lines may show a higher deviation than the paramters mentioned above.
- On each reel, only one bin is sorted and taped. The bin is defined on the current transfer ratio.
- In order to ensure highest availability, the reel binning of standard deliveries can vary. A single bin cannot be ordered. Please contact us
 in advance, if you need a particular bin sorting before placing your order.
- These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

The customer has the sole responsibility to ensure that he uses the latest version of this datasheet, which is available on Würth Elektronik's homepage. Unless otherwise agreed in writing (i.e. customer specific specification), changes to the content of this datasheet may occur without notice, provided that the changes do not have a significant effect on the usability of the optoelectronic components.

	B 0			CHECKED SaVo	REVISION 001.006	DATE (YYYY-MM-DD) 2023-04-11	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	=	⊕ -
				- WL-OCPT Optocoupler Phototransistor							
			Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germanv					ORDER CODE 140816141110			
	MORE 1 YOU EX		Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	size/type DIP 4			BUSINESS UNIT eiPal	status Valid			PAGE 14/15

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on use in equipment. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that require high astept and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability intended on user and reliability intended about the intent of such usage before the design-in stage. In addition, sufficient reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and reliability intended on user and reliability and re

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

			CHECKED SaVo	REVISION 001.006	DATE (YYYY-MM-DD) 2023-04-11	GENERAL TOLERANCE DIN ISO 2768-1 m		PROJECTION METHOD) -
Würth Elektronik eiSos Grabh & Co. KG EMOUNT COMPLIANT BURTH WÜRTH MAX-Eyth-Sh. 1				WL-OCPT Optocoupler Phototransistor				ORDER CODE 140816141110		
k/ 2	ELEKTRONIK MORE THAN YOU EXPECT	74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE DIP 4			BUSINESS UNIT eiPal	status Valid	010141		PAGE 15/15

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.