## SIEMENS

## Data sheet

## 3VA5120-4EC36-0AA0



circuit breaker 3VA5 UL frame 125 breaking capacity class S 25kA @ 480 V 3-pole, line protection TM230, FTAM, In=20A overload protection Ir=20A fixed short-circuit protection Ii=7.5...15 x In cable connection on both sides

Model	
product brand name	SENTRON
product designation	Molded-case circuit breaker
product designation / according to UL file	SEAS
Product version	System protection
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes
design of the load switch / according to UL 489 / High- Intensity-Discharge circuit breaker (HID Type)	Yes
design of the load switch / according to UL 489 / Switching Duty circuit breaker (SWD Type)	Yes
design of the overcurrent release	TM230
protection function of the overcurrent release	LI
number of poles	3
General technical data	
insulation voltage / rated value	800 V
Max. rated operational voltage Ue with DC	500 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	12.2 W
Active power loss / for rated value of the current / at AC / in hot operating state / per pole	4.07 W
mechanical service life (switching cycles) / typical	20 000
Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz	8 000
Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz	4 000
electrical endurance (switching cycles) / at 480 V	8 000
electrical endurance (switching cycles) / at 600 V	4 000
Neutral conductors / upgradeable/retrofittable	No
ground-fault monitoring version	without
product function	
<ul> <li>communication function</li> </ul>	No
<ul> <li>other measurement function</li> </ul>	No
Net Weight	1.017 kg
Current	
marking / according to UL 489 / 100%-rated breaker	No
operational current	
• at 40 °C	20 A
• at 45 °C	20 A
• at 50 °C	19 A
• at 55 °C	19 A
• at 60 °C	19 A

● at 65 °C	18 A
• at 70 °C	18 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	S
breaking capacity maximum short-circuit current (Icu)	
• at 240 V	55 kA
• at 415 V	36 kA
• at 690 V	5 kA
breaking capacity operating short-circuit current (Ics)	
• at 240 V	85 kA
• at 415 V	36 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm) • at 240 V	121 kA
• at 240 V	75.6 kA
• at 690 V	7.5 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case
	circuit breaker device manual; link to be found under Service & Support
Switching capacity according to UL 489	in the last chapter
breaking capacity according to be 400	
• at 240 V	65 kA
• at 480 V	25 kA
• at 600 Y/347 V	14 kA
Adjustable parameters	
product feature / for L-tripping / selectable characteristic	No
function type of value list setting current (Ir) / for L-tripping / with I2t	Fest
characteristic reference value setting current (Ir) / for L-tripping / with I2t	x In
characteristic set values setting current (Ir) / for L-tripping / with I2t	1
characteristic adjustable response factor setting current (Ir) / for L-	1
tripping / with I2t characteristic / minimum adjustable response factor setting current (Ir) / for L-	1
tripping / with I2t characteristic / maximum adjustable response value setting current (Ir) / of the L-trip	20 A
/ with I2t characteristic / minimum adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic / maximum	20 A
type of value list delay time (tr) / for L-tripping / with I2t characteristic	Fest
reference value delay time (tr) / for L-tripping / with I2t characteristic	S
set values delay time (tr) / for L-tripping / with I2t characteristic	1
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic / minimum	1 s
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic / maximum	1 s
product feature / for S-tripping / independent of direction / selectable characteristic function	No
product feature / for I-tripping / can be switched on/off design of I-trip / adjustable	No Yes
reference value setting current (li) / for I-tripping	x In
set values setting current (li) / for I-tripping	7.5;9;10.5;12;13.5;15
adjustable response factor setting current (li) / for I- tripping / minimum	7.5
adjustable response factor setting current (li) / for I- tripping / maximum	15
adjustable response value setting current (li) / for I-tripping / minimum	150 A
adjustable response value setting current (li) / for I-tripping / maximum	300 A
product feature / for G-tripping / selectable characteristic function	No

s s n A A (_3VA5_1_20A_TM2_SuMuH_uT (_3VA5_1_20A_TM2_SuMuH_oT =_3VA5_1_20A_TM_line u starter_3u4p_240V =_3VA5_1_20A_TM_line u starter_3u4p_415V =_3VA5_1_20A_TM_line u starter_3u4p_690V S_3VA5_1_20A_TM_line u starter_3u4p_240V S_3VA5_1_20A_TM_line u starter_3u4p_690V
n A A (
n A A (
n A A (
A (_3VA5_1_20A_TM2_SuMuH_uT (_3VA5_1_20A_TM2_SuMuH_oT =_3VA5_1_20A_TM_line u starter_3u4p_240V =_3VA5_1_20A_TM_line u starter_3u4p_415V =_3VA5_1_20A_TM_line u starter_3u4p_690V S_3VA5_1_20A_TM_line u starter_3u4p_240V S_3VA5_1_20A_TM_line u starter_3u4p_240V
A (_3VA5_1_20A_TM2_SuMuH_uT (_3VA5_1_20A_TM2_SuMuH_oT =_3VA5_1_20A_TM_line u starter_3u4p_240V =_3VA5_1_20A_TM_line u starter_3u4p_415V =_3VA5_1_20A_TM_line u starter_3u4p_690V S_3VA5_1_20A_TM_line u starter_3u4p_240V S_3VA5_1_20A_TM_line u starter_3u4p_415V
C_3VA5_1_20A_TM2_SuMuH_uT C_3VA5_1_20A_TM2_SuMuH_oT E_3VA5_1_20A_TM_line u starter_3u4p_240V E_3VA5_1_20A_TM_line u starter_3u4p_415V E_3VA5_1_20A_TM_line u starter_3u4p_690V C_3VA5_1_20A_TM_line u starter_3u4p_240V C_3VA5_1_20A_TM_line u starter_3u4p_415V
C_3VA5_1_20A_TM2_SuMuH_oT =_3VA5_1_20A_TM_line u starter_3u4p_240V =_3VA5_1_20A_TM_line u starter_3u4p_415V =_3VA5_1_20A_TM_line u starter_3u4p_690V S_3VA5_1_20A_TM_line u starter_3u4p_240V S_3VA5_1_20A_TM_line u starter_3u4p_415V
=_3VA5_1_20A_TM_line u starter_3u4p_240V =_3VA5_1_20A_TM_line u starter_3u4p_415V =_3VA5_1_20A_TM_line u starter_3u4p_690V S_3VA5_1_20A_TM_line u starter_3u4p_240V S_3VA5_1_20A_TM_line u starter_3u4p_415V
=_3VA5_1_20A_TM_line u starter_3u4p_415V =_3VA5_1_20A_TM_line u starter_3u4p_690V &_3VA5_1_20A_TM_line u starter_3u4p_240V &_3VA5_1_20A_TM_line u starter_3u4p_415V
E_3VA5_1_20A_TM_line u starter_3u4p_690V S_3VA5_1_20A_TM_line u starter_3u4p_240V S_3VA5_1_20A_TM_line u starter_3u4p_415V
S_3VA5_1_20A_TM_line u starter_3u4p_240V S_3VA5_1_20A_TM_line u starter_3u4p_415V
S_3VA5_1_20A_TM_line u starter_3u4p_240V S_3VA5_1_20A_TM_line u starter_3u4p_415V
S_3VA5_1_20A_TM_line u starter_3u4p_415V
S_3VA5_1_20A_TM_line u starter_3u4p_690V
A
A
)
)
)
)
51 in
0 mm
n
(14 AWG - 8 AWG)
.2 mm
01 in
.5 mm
ont connection
cular conductor terminal on both sides
S
40
5 °C
°C
D°C
°C

**Declaration of Conformity** 

Marine / Shipping











**Miscellaneous** 

## **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA5120-4EC36-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA5120-4EC36-0AA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA5120-4EC36-0AA0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications










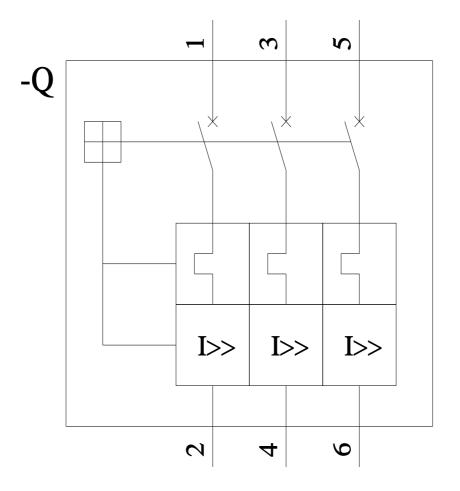

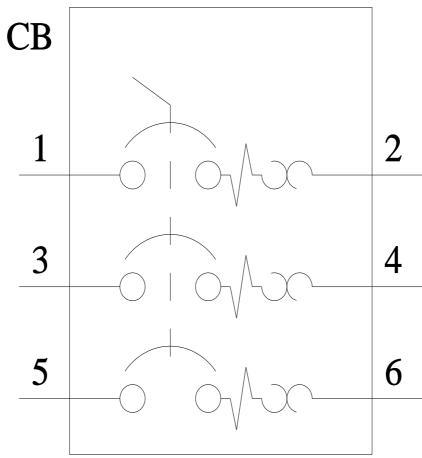

last modified:

7/14/2022 🖸