## INDUCTORS

## **公TDK**

Inductors for power circuits Wound ferrite **VLB** series







## FEATURES


- O High-current SMD inductor.
- O Low-profile design.
- O High output processing capacity: Minimal copper loss
- O High saturation current and low DC resistance.
- O High operating frequency: Up to 2MHz
- Operating temperature range: -40 to +125°C (including self-temperature rise)

#### APPLICATION

O Personal computers, servers (Voltage Regulator Modules, etc.)

O Amusement equipment, AV equipment, etc.

## PART NUMBER CONSTRUCTION



### CHARACTERISTICS SPECIFICATION TABLE

L	Measuring DC resistance Rated curren frequency		ent*	Part No.			
					Isat	Itemp	
(nH)	Tolerance	(MHz)	<b>(m</b> Ω)	Tolerance(%)	(A)typ.	(A)typ.	
90	±20%	1	0.27	±6	64	36	<u>VLB7050HT-R09M</u>
110	±20%	1	0.27	±6	47	36	VLB7050HT-R11M
150	±20%	1	0.27	±6	37	36	VLB7050HT-R15M

\* Rated current: smaller value of either Isat or Itemp.

Isat: When based on the inductance change rate (20% below the nominal value)

Itemp: When based on the temperature increase (temperature increase of 40°C by self heating)

#### Measurement equipment

Measurement item	Product No.	Manufacturer
L	4194A	Keysight Technologies
DC resistance	3541	HIOKI
Rated current Isat	3260+3265B	Wayne Kerr Electronics


\* Equivalent measurement equipment may be used.



20180802


# VLB7050 type

## L FREQUENCY CHARACTERISTICS

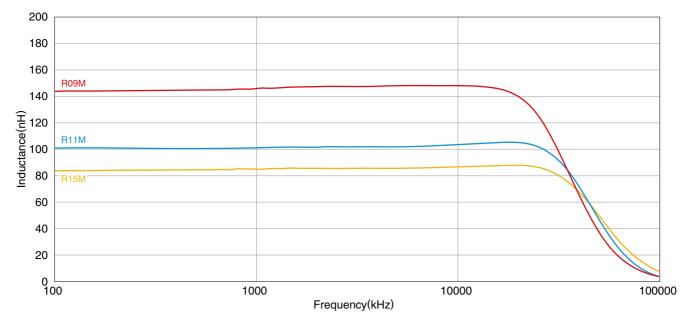

Measurement equipment	surement equipment		
Product No.	Manufacturer		
4294A	Keysight Technologies		
* Equivalent measurement equipment may be used.			

## ■ INDUCTANCE VS. DC BIAS CHARACTERISTICS

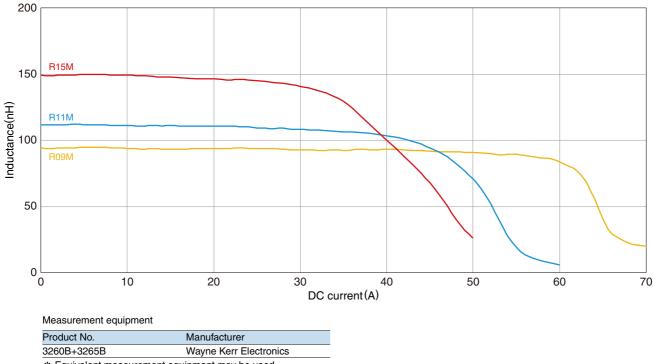


\* Equivalent measurement equipment may be used.


A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (2/4) Please note that the contents may change without any prior notice due to reasons such as upgrading.

# VLB7050 type

## SHAPE & DIMENSIONS

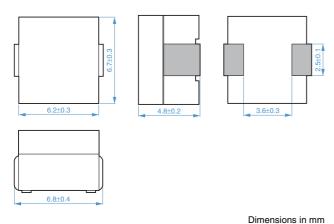

## PACKAGING STYLE

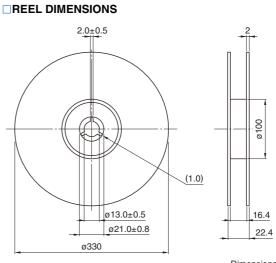



Dimensions in mm

### RECOMMENDED LAND PATTERN



Dimensions in mm

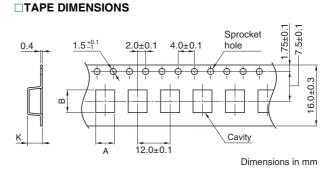




#### **PACKAGE QUANTITY**

Package quantity	500 pcs/reel

### **TEMPERATURE RANGE, INDIVIDUAL WEIGHT**

ĺ	Operating temperature range*	Storage temperature range**	Individual weight
	–40 to +125 °C	–40 to +125°C	0.95 g
	* Operating temperature range includes self-temperature rise.		

\*\* The storage temperature range is for after the assembly.

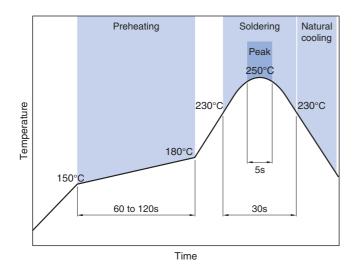

RECOMMENDED REFLOW PROFILE

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (3/4)

20180802

## **REMINDERS FOR USING THESE PRODUCTS**

Before using these products, be sure to request the delivery specifications.

## SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

The storage period is less than 6 months. Be sure to follow the storage conditions (temperature: 5 to 30°C, humidity: 10 to 75% RH or less).		
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.		
Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).		
Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.		
<ul> <li>Soldering corrections after mounting should be within the range of the conditions determined in the specifications.</li> <li>If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.</li> </ul>		
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.		
Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set therma design.		
<ul> <li>Carefully lay out the coil for the circuit board design of the non-mag A malfunction may occur due to magnetic interference.</li> </ul>	gnetic shield type.	
◯ Use a wrist band to discharge static electricity in your body through the grounding wire.		
O Do not expose the products to magnets or magnetic fields.		
O Do not use for a purpose outside of the contents regulated in the d	elivery specifications.	
<ul> <li>The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.</li> <li>The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society person or property.</li> <li>If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.</li> </ul>		
<ol> <li>Aerospace/aviation equipment</li> <li>Transportation equipment (cars, electric trains, ships, etc.)</li> <li>Medical equipment</li> <li>Power-generation control equipment</li> <li>Atomic energy-related equipment</li> <li>Seabed equipment</li> <li>Transportation control equipment</li> <li>Transportation control equipment</li> </ol>	<ul> <li>(8) Public information-processing equipment</li> <li>(9) Military equipment</li> <li>(10) Electric heating apparatus, burning equipment</li> <li>(11) Disaster prevention/crime prevention equipment</li> <li>(12) Safety equipment</li> <li>(13) Other applications that are not considered general-purpose applications</li> </ul>	

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (4/4) Please note that the contents may change without any prior notice due to reasons such as upgrading.