



### FEATURES

- Short circuit protection options
- UL 60950 recognised
- Single or dual isolated outputs
- 1kVDC or 3kVDC options 'Hi Pot Test'
- Wide temperature performance at full 0.75W load -40°C to 85°C
- Industry standard pinouts
- 5V, 12V & 24V inputs
- 5V, 12V & 15V outputs
- Pin compatible with NMR, MER1, MMV, MEV1, NMK, MEV3 & NMV series.

### DESCRIPTION

The CMR series are a cost effective 0.75W DC-DC converter series, in an industry standard package with industry standard pinouts. Popular input and output voltages are available as a lower power alternative to a 1W DC-DC converter. The galvanic isolation allows the device to be configured to provide an isolated negative rail in systems where only positive rails exist. The wide temperature range guarantees startup from -40°C and full 0.75 watt output at 85°C. For the short circuit protected parts (PC) protection is continuous and auto-resetting on removal of the short circuit.

### SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Load Regulation		Ripple & Noise <sup>3</sup>		Input Current at rated load	Efficiency		Isolation Capacitance	MTTF	
	V	V	mA	%		mV p-p			%			MIL. kHrs	Tel.
				Typ.	Max.	Typ.	Max.	mA	Min.	Typ.	pF		
<b>CMR100C</b>	5	5	150	9	11	6	10	218	65	69	30	1850	
<b>CMR118C</b>	24	5	150	6.8	10	8	15	46	65	70	60	1250	
<b>3kVDC Isolation Options</b>													
<b>CMR0505SA3C</b>	5	5	150	9	11	15	25	220	64	68	30	4240	
<b>CMR0512S3C</b>	5	±12	±31	5	6	6.7	8	192	74	78	30	1560	
<b>CMR0515S3C</b>	5	±15	±25	4	6	6.3	8.2	188	76	79	30	1060	
<b>CMR1215S3C</b>	12	±15	±25	3	4.5	6.5	13	80	76	79	40	925	
<b>Short Circuit Protection Options</b>													
<b>CMR100PC</b>	5	5	150	7.5	9	10	25	200	73	75.5	22	3095	61060
<b>CMR0505SAP3C<sup>4</sup></b>	5	5	150	7.5	9	20	40	195	74	76	20	2680	56444

### INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	
	Continuous operation, 24V input types	21.6	24	26.4	
Input short circuit current	Short circuit variants		95		mA
	CMR100PC		2	15	
Input reflected ripple current	CMR0505SAP3C		5	15	mA p-p
	5V & 12V input types		2.6	4	
	24V input types		10	15	

### OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power <sup>2</sup>	T <sub>A</sub> = -40°C to 85°C			0.75	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub> ; Short circuit types		1.15	1.2	%/%
	High V <sub>IN</sub> to low V <sub>IN</sub> ; All other output types		1.0	1.2	

### ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	C versions flash tested for 1 second	1000			VDC
	3C versions flash tested for 1 minute	3000			
Resistance	V <sub>iso</sub> = 1000VDC	10			GΩ

### GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	5V input types		110		kHz
	12V input types		120		
	24V input types		80		
	CMR100PC		97		
	CMR0505SAP3C		88		

1. Calculated using MIL-HDBK-217 FN2 and Telcordia SR-332 calculation model with nominal input voltage at full load.
  2. See derating graph.
  3. See ripple & noise characterisation method.
  4. 3kVDC Isolation
- All specifications typical at T<sub>A</sub> = 25°C, nominal input voltage and rated output current unless otherwise specified.



  
For full details go to  
<https://www.murata.com/en-global/products/power/rohs>



TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types, see safety approval section for UL temperature specification	-40		85	°C
Storage		-50		125	
Case Temperature above ambient	5V output types		33		
	All other output types		28		
	1kVDC short circuit types		18		
	3kVDC short circuit types		19		
Cooling	Free air convection				

ABSOLUTE MAXIMUM RATINGS	
Lead temperature 1.5mm from case for 10 seconds	260°C
Wave Solder	Wave Solder profile not to exceed the profile recommended in IEC 61760-1 Section 6.1.3. Please refer to <a href="#">application notes</a> for further information.
5V input types	7V
12V input types	15V
24V input types	28V

**TECHNICAL NOTES**

**ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions CMR series of DC-DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second for C versions and 3kVDC for 1 minute for 3C versions.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The CMR is recognised by Underwriters Laboratory for functional insulation, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

**REPEATED HIGH-VOLTAGE ISOLATION TESTING**

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The CMR series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enamelled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognised parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

**SAFETY APPROVAL**

**UL60950**

The CMR is recognised by Underwriters Laboratory (UL) to UL 60950 for functional insulation. The CMR100C and CMR118C in a maximum still air ambient temperature of 100°C as measured at any point on the case of the unit (hotspot).

**FUSING**

The CMR Series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below.

- CMR100xC: 0.5A
- CMR118C: 0.12A
- CMR05xxx3C: 0.315A
- CMR12xxx3C: 1A

All fuses should be UL recognised and rated to 125V.  
File number E151252 applies.


**RoHS COMPLIANCE INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. Please refer to [application notes](#) for further information. The pin termination finish on this product series is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems. For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)


**PART NUMBER STRUCTURE**

**CMR1 XX X C**

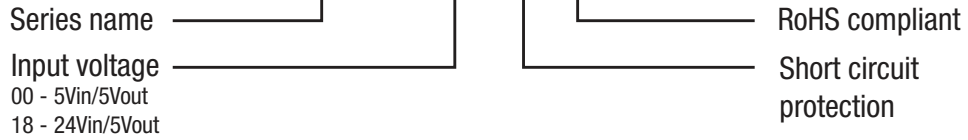

**PART NUMBER STRUCTURE**

**CMR XX XX S A P 3 C**

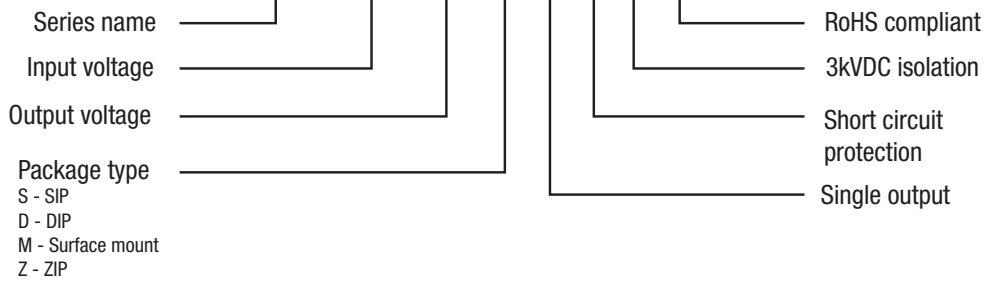

**CHARACTERISATION TEST METHODS**


**Ripple & Noise Characterisation Method**

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100mΩ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, ±1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires

Measured values are multiplied by 10 to obtain the specified values.

**Differential Mode Noise Test Schematic**

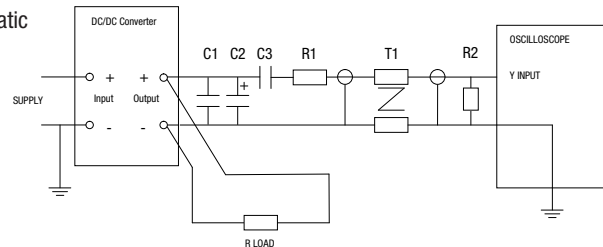

**APPLICATION NOTES**

**Minimum load**


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

**Capacitive loading and start up**

Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into a capacitance of 47µF with an increased start time, however, the maximum recommended output capacitance is 10µF.

	Start-up time	
	µs	
CMR100C	2300	
CMR118C	670	
CMR0505SA3C	1970	
CMR0512S3C	11200	
CMR0515S3C	16300	
CMR1215S3C	11200	
CMR100PC	360	
CMR0505SAP3C	370	

**Typical Start-Up Wave Form**



**APPLICATION NOTES (Continued)**


**Output Ripple Reduction**

By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

**Component selection**

**Capacitor:** It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended. The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC-DC converter.

**Inductor:** The rated current of the inductor should not be less than that of the output of the DC-DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC-DC converter. The SRF (Self Resonant Frequency) should be >20MHz.

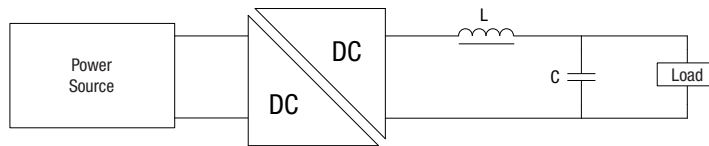


	Inductor			Capacitor
	L, $\mu$ H	SMD	Through Hole	C, $\mu$ F
CMR100C	10	82103C	11R103C	4.7
CMR118C	10	82103C	11R103C	4.7
CMR0505SA3C	22	82223C	11R223C	1
CMR0512S3C	150	82154C	11R154C	0.33
CMR0515S3C	220	82224C	11R224C	0.33
CMR1215S3C	220	82224C	11R224C	0.22
CMR100PC	22	82223C	11R223C	1
CMR0505SAP3C	22	82223C	11R223C	1


**TOLERANCE ENVELOPES**

The voltage tolerance envelopes show typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading and set point accuracy.


**All 5V output types**

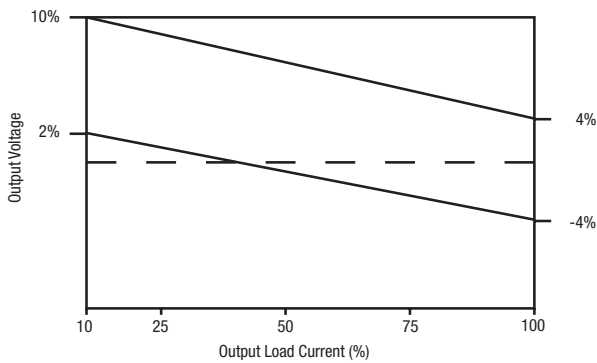

**All other output types**

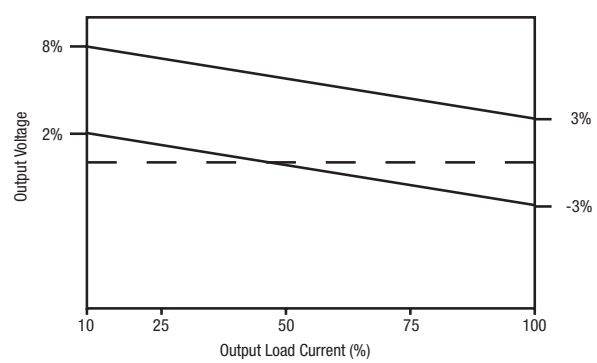


**Short circuit types**

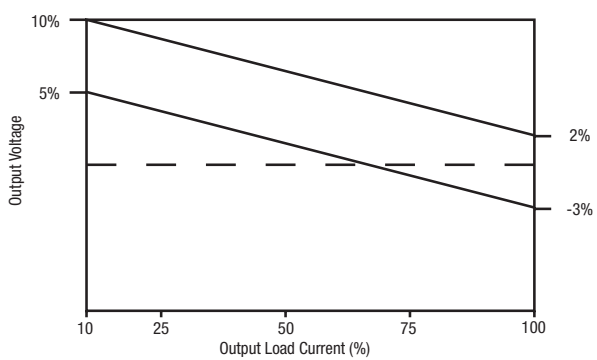


**TEMPERATURE DERATING GRAPHS**

Short Circuit types only.

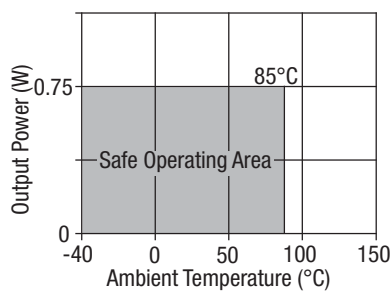

All other types.

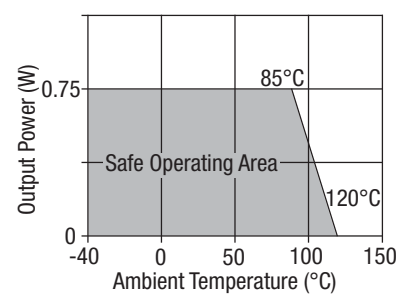

**EFFICIENCY VS LOAD**

CMR100C

CMR118C

CMR0505SA3C

CMR0512S3C


CMR0515S3C

CMR1215S3C




**EFFICIENCY VS LOAD (Continued)**

**CMR100PC**

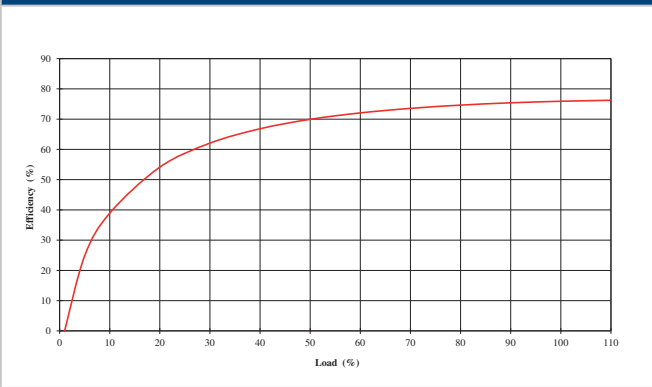


**CMR0505SAP3C**

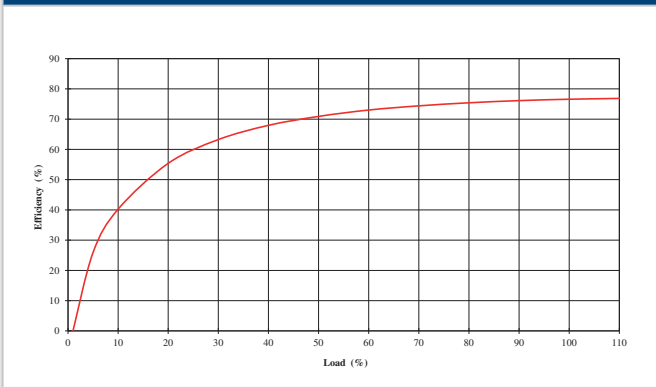

**EMC FILTERING AND SPECTRA**

**FILTERING**

The following filter circuit and filter table shows the input filters typically required to meet EN 55022 Curve B, Quasi-Peak EMC limit, as shown in the following plots. The following plots show positive and negative quasi peak and CISPR22 Average Limit B (pink line) and Quasi Peak Limit B (green line) adherence limits.

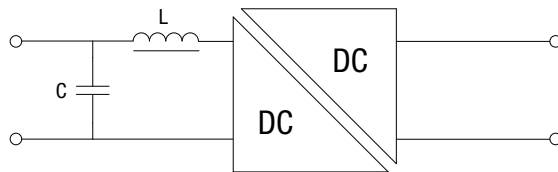

**C** Ceramic capacitor

Part Number	Inductor			Capacitor
	L, $\mu$ H	SMD	Through Hole	C, $\mu$ F
<b>CMR100C</b>				
<b>CMR118C</b>				
<b>CMR0505SA3C</b>				
<b>CMR0512S3C</b>				
<b>CMR0515S3C</b>				
<b>CMR1215S3C</b>				
<b>CMR100PC</b>	22	82223C	11R223C	1
<b>CMR0505SAP3C</b>				

**CMR100C**


**CMR118C**

**CMR0505SA3C**


**CMR0512S3C**

EMC FILTERING AND SPECTRA (Continued)


CMR0515S3C

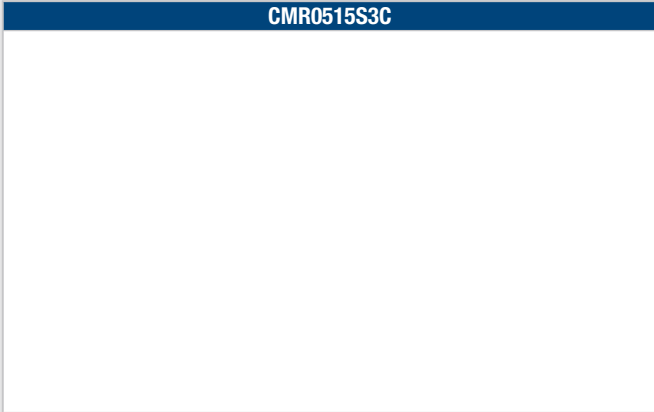

CMR1215S3C

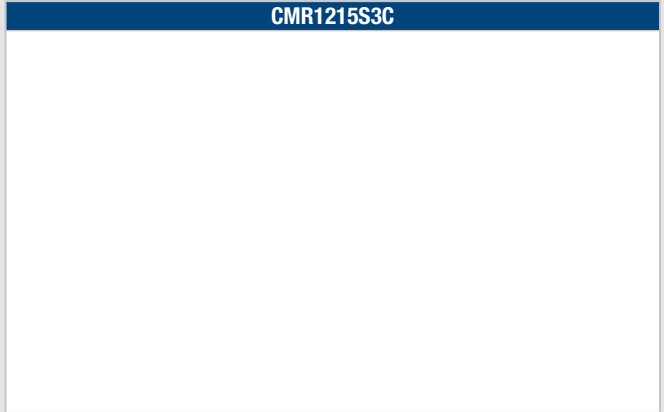

CMR100PC

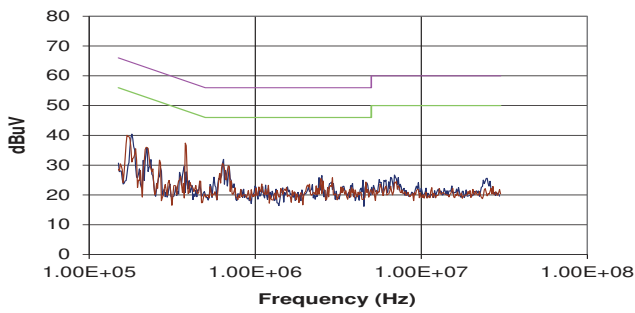


CMR0505SAP3C



**PACKAGE SPECIFICATIONS**


**MECHANICAL DIMENSIONS**

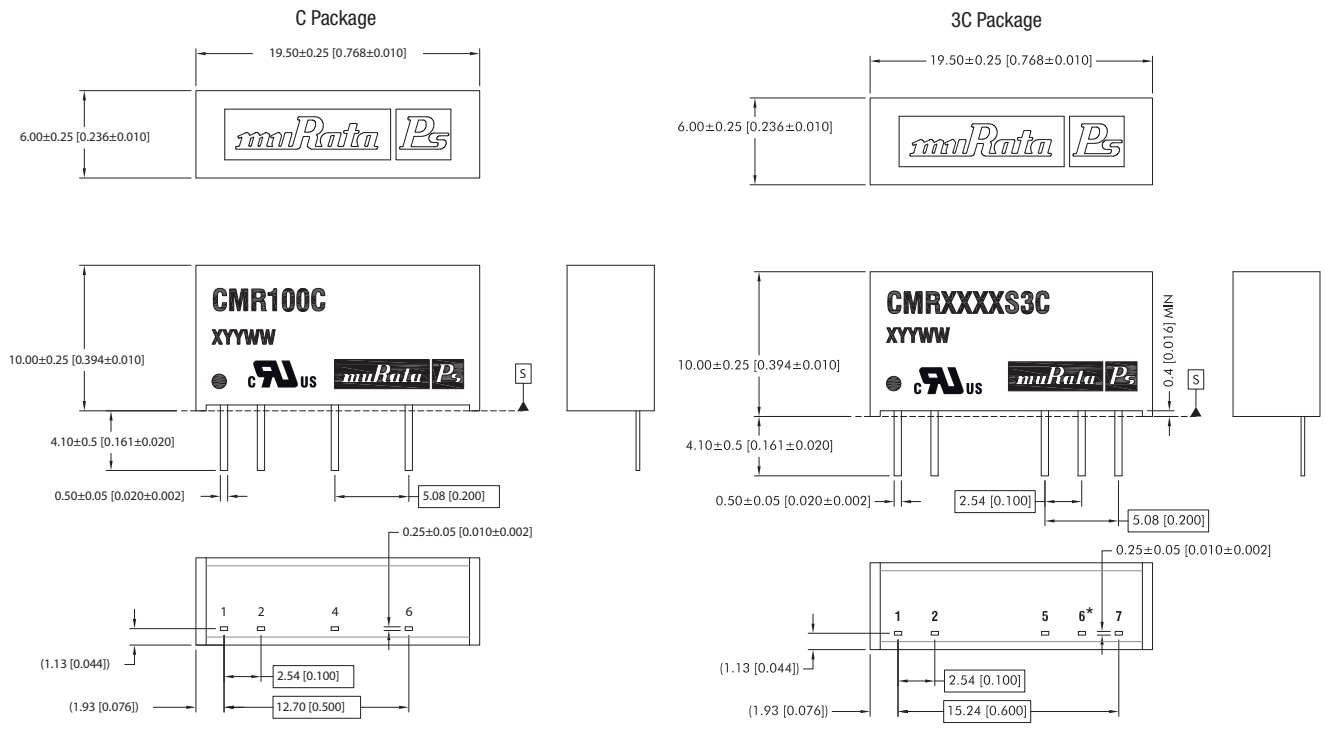

\*PIN 6 not fitted on single output variants  
 All dimensions in mm (inches) Controlling dimension is mm.  
 All pins on a 2.54 (0.100) pitch and within ±0.1 (0.004) of true position from pin 1 at seating plane 'S'  
 For SIP products, from date code D2224 onwards, products have an embossed logo on the top of the case.  
 Prior to this date, SIP products have a flat surface finish.

Weight: 2.1g (C) 2.0g (3C) 1.9g (PC)

**TUBE OUTLINE DIMENSIONS**

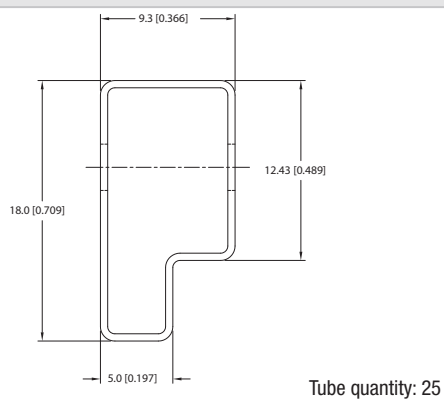


Tube Length : 520mm [20.472] ±2.0 [0.079].  
 Unless otherwise specified all dimensions in mm [inches] ±0.55mm [0.022].

**PIN CONNECTIONS**

PIN	C	3C	
		Single	Dual
1	+VIN	+VIN	+VIN
2	-VIN	-VIN	-VIN
4	-VOUT		
5		-VOUT	-VOUT
6	+VOUT		0V
7		+VOUT	+VOUT

**PACKAGE SPECIFICATIONS (Continued)**

**RECOMMENDED FOOTPRINT DETAILS**

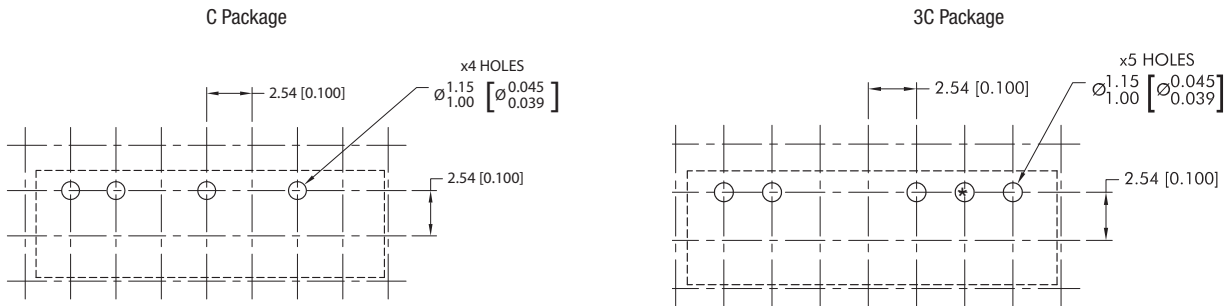

\* Hole not required for single output variants  
 All dimensions in millimetres  $\pm 0.25$  (inches  $\pm 0.1$ )

**DISCLAIMER**

Unless otherwise stated in the datasheet, all products are designed for standard commercial and industrial applications and NOT for safety-critical and/or life-critical applications.

Particularly for safety-critical and/or life-critical applications, i.e. applications that may directly endanger or cause the loss of life, inflict bodily harm and/or loss or severe damage to equipment/property, and severely harm the environment, a prior explicit written approval from Murata is strictly required. Any use of Murata standard products for any safety-critical, life-critical or any related applications without any prior explicit written approval from Murata shall be deemed unauthorised use.

These applications include but are not limited to:

- Aircraft equipment
- Aerospace equipment
- Undersea equipment
- Power plant control equipment
- Medical equipment
- Transportation equipment ( automobiles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data Processing equipment

Murata makes no express or implied warranty, representation, or guarantee of suitability, fitness for any particular use/purpose and/or compatibility with any application or device of the buyer, nor does Murata assume any liability whatsoever arising out of unauthorised use of any Murata product for the application of the buyer. The suitability, fitness for any particular use/purpose and/or compatibility of Murata product with any application or device of the buyer remain to be the responsibility and liability of the buyer.

Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify and hold Murata, its affiliated companies, and its representatives harmless against any damages arising out of unauthorised use of any Murata products in any safety-critical and/or life-critical applications.

Remark: Murata in this section refers to Murata Manufacturing Company and its affiliated companies worldwide including, but not limited to, Murata Power Solutions.



**This product is subject to the following [operating requirements](https://www.murata.com/en-eu/products/power/requirements) and the [Life and Safety Critical Application Sales Policy](https://www.murata.com/en-eu/products/power/requirements):**

**Refer to:** <https://www.murata.com/en-eu/products/power/requirements>

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2022 Murata Power Solutions (Milton Keynes) Ltd.