SIEMENS

Data sheet


3VA5160-4ED32-0AA0



circuit breaker 3VA5 UL frame 125 breaking capacity class S 25kA @ 480 V 3-pole, line protection TM210, FTFM, In=60A overload protection Ir=60A fixed short-circuit protection Ii=10 x In nut keeper kit on both sides

| Model | |
|--|-----------------------------|
| product brand name | SENTRON |
| product designation | Molded-case circuit breaker |
| product designation / according to UL file | SEAS |
| Product version | System protection |
| design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type) | Yes |
| design of the load switch / according to UL 489 / High- Intensity-Discharge circuit breaker (HID Type) | No |
| design of the load switch / according to UL 489 / Switching Duty circuit breaker (SWD Type) | No |
| design of the overcurrent release | TM210 |
| protection function of the overcurrent release | LI |
| number of poles | 3 |
| General technical data | |
| rated insulation voltage Ui | 800 V |
| Max. rated operational voltage Ue with DC | 500 V |
| operating voltage / at AC / rated value | 690 V |
| power loss [W] / maximum | 15.4 W |
| Active power loss / for rated value of the current / at AC / in hot operating state / per pole | 5.13 W |
| mechanical service life (switching cycles) / typical | 20 000 |
| Electrical endurance (switching cycles) / at AC-1 / at 380/415 V 50/60 Hz | 8 000 |
| Electrical endurance (switching cycles) / at AC-1 / at 690 V 50/60 Hz | 4 000 |
| electrical endurance (switching cycles) / at 480 V | 8 000 |
| electrical endurance (switching cycles) / at 600 V | 4 000 |
| Neutral conductors / upgradeable/retrofittable | No |
| ground-fault monitoring version | without |
| product function | |
| communication function | No |
| other measurement function | No |
| Net Weight | 1.034 kg |
| Current | |
| marking / according to UL 489 / 100%-rated breaker | No |
| operational current | |
| • at 40 °C | 60 A |
| ● at 45 °C | 59 A |
| ● at 50 °C | 58 A |

| ● at 55 °C | 57 A |
|--|--|
| • at 60 °C | 57 A 56 A |
| • at 65 °C | 55 A |
| • at 70 °C | 54 A |
| Switching capacity according to IEC 60947 | |
| switching capacity class of the circuit breaker | S |
| breaking capacity maximum short-circuit current (Icu) | |
| • at 240 V | 55 kA |
| • at 415 V | 36 kA |
| • at 690 V | 5 kA |
| breaking capacity operating short-circuit current (lcs) | |
| • at 240 V | 85 kA |
| ● at 415 V | 36 kA |
| ● at 690 V | 5 kA |
| short-circuit current making capacity (lcm) | |
| • at 240 V | 121 kA |
| • at 415 V | 75.6 kA |
| • at 690 V | 7.5 kA |
| design of short-circuit protection | For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter |
| Switching capacity according to UL 489 | |
| breaking capacity current | |
| • at 240 V | 65 kA |
| • at 480 V | 25 kA |
| • at 600 Y/347 V | 14 kA |
| Adjustable parameters | |
| Adjustable response value current / lg min. | 42 A |
| Adjustable response value current / lg min. | 60 A |
| Ground fault protection / tripping switchable / I2t=ON/OFF | No |
| Mechanical Design | |
| height [in] | 5.51 in |
| Height | 140 mm |
| width [in] | 3 in |
| Width | 76.2 mm |
| depth [in] | 3.01 in |
| | |
| depth | 76.5 mm |
| Connections | 76.5 mm |
| Connections arrangement of electrical connectors / for main current circuit | Front connection |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit | Front connection nut keeper kit on both ends |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. | Front connection nut keeper kit on both ends 12 x 1 mm |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. | Front connection nut keeper kit on both ends |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit | Front connection nut keeper kit on both ends 12 x 1 mm |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No No |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No O |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No No |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No No Yes |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No O |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No No Yes IP40 |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature • during operation / minimum | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No No Ves IP40 -25 °C |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature • during operation / minimum • during operation / maximum | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No No Ves IP40 -25 °C 70 °C |
| Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit Type of connectable conductor cross-section, connection screw, width x thickness , min. Type of connectable conductor cross-section, connection screw, width x thickness , max. Auxiliary circuit product component • undervoltage release • voltage trigger • trip indicator number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature • during operation / minimum | Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm No No No No Ves IP40 -25 °C |

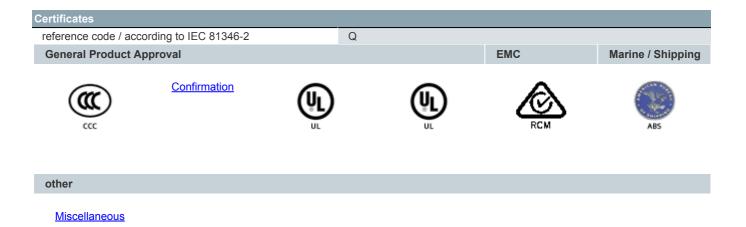

Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA5160-4ED32-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA5160-4ED32-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA5160-4ED32-0AA0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications










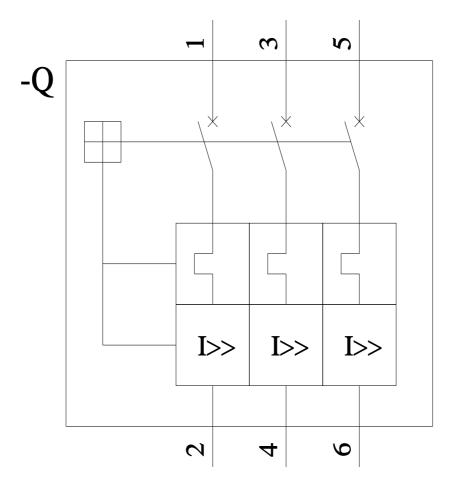

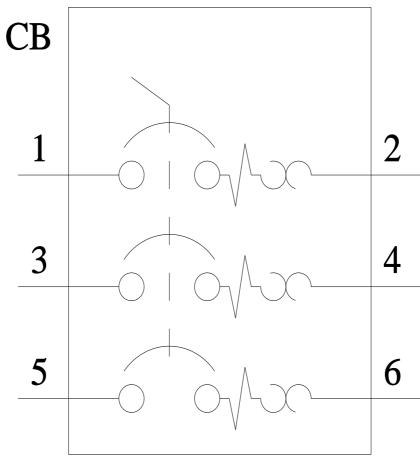

last modified:

7/15/2022 🖸