

## Ultra-Low Offset Voltage Operational Amplifier

March 1993

### Features

- Low Offset Voltage.....20 $\mu$ V
- Low Offset Voltage Drift .....0.2 $\mu$ V/ $^{\circ}$ C
- High Voltage Gain .....150dB
- High CMRR.....140dB
- High PSRR .....135dB
- Low Noise.....9.0nV/ $\sqrt{\text{Hz}}$
- Low Power Consumption ..... 51mW Max.

### Applications

- High Gain Instrumentation Amplifiers
- Precision Control Systems
- Precision Integrators
- High Resolution Data Converters
- Precision Threshold Detectors
- Low Level Transducer Amplifiers

### Description

The HA-5177 is a monolithic, all bipolar, precision operational amplifier, utilizing Harris dielectric isolation and advance processing techniques. This design features a combination of precision input characteristics, wide bandwidth (2MHz) and high speed (0.8V/ $\mu$ s).

The HA-5177 uses advanced matching techniques and laser trimming to produce low offset voltage (20 $\mu$ V) and low offset voltage drift (0.2 $\mu$ V/ $^{\circ}$ C). This design also features low voltage noise (9.0nV/ $\sqrt{\text{Hz}}$ ), low current noise (1.2pA/ $\sqrt{\text{Hz}}$ ), nano-amp input currents, and 120dB minimum gain.



These outstanding features along with high CMRR (140dB) and high PSRR (135dB) make this unity gain stable amplifier ideal for high resolution data acquisition systems, precision integrators, and low level transducer amplifiers.

The HA-5177 can be used as a direct replacement for the OP05, OP07, and OP77 while offering higher bandwidth and slew rate. See the HA-5177/883 data sheet for military grade parts and LCC package.

### Ordering Information

| PART NUMBER | TEMPERATURE RANGE                     | PACKAGE            |
|-------------|---------------------------------------|--------------------|
| HA2-5177-2  | -55 $^{\circ}$ C to +125 $^{\circ}$ C | 8 Pin CAN          |
| HA2-5177-5  | 0 $^{\circ}$ C to +75 $^{\circ}$ C    | 8 Pin CAN          |
| HA3-5177-5  | 0 $^{\circ}$ C to +75 $^{\circ}$ C    | 8 Lead Plastic DIP |
| HA7-5177-2  | -55 $^{\circ}$ C to +125 $^{\circ}$ C | 8 Lead Ceramic DIP |
| HA7-5177-5  | 0 $^{\circ}$ C to +75 $^{\circ}$ C    | 8 Lead Ceramic DIP |
| HA9P5177-5  | 0 $^{\circ}$ C to +75 $^{\circ}$ C    | 8 Lead SOIC        |

### Pinouts



## Specifications HA-5177

### Absolute Maximum Ratings (Note 1)

|   |                         |
|---|-------------------------|
| Supply Voltage Between V+ and V- Terminals..... | 44V                     |
| Differential Input Voltage.....                 | 7V                      |
| Output Current.....                             | Short Circuit Protected |
| Junction Temperature.....                       | +175°C                  |
| Junction Temperature (Plastic Package).....     | +150°C                  |
| Lead Temperature (Soldering 10 Sec.).....       | +300°C                  |

### Operating Conditions

|                                |   |
|--------------------------------|---|
| Operating Temperature Range    | HA-5177-2..... $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ |
|                                | HA-5177-5..... $0^{\circ}\text{C} \leq T_A \leq +75^{\circ}\text{C}$    |
| Storage Temperature Range..... | $-65^{\circ}\text{C} \leq T_A \leq +150^{\circ}\text{C}$                |

*CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.*

### Electrical Specifications $V_+ = +15\text{V}$ , $V_- = -15\text{V}$ , Unless Otherwise Specified

| PARAMETER                                       | TEMP                  | HA-5177  |      |     | UNITS                          |
|---|-----------------------|----------|------|-----|--------------------------------|
|   |                       | MIN      | TYP  | MAX |                                |
| <b>INPUT CHARACTERISTICS</b>                    |                       |          |      |     |                                |
| Offset Voltage                                  | +25°C                 | -        | 20   | 60  | $\mu\text{V}$                  |
|   | Full                  | -        | 40   | 100 | $\mu\text{V}$                  |
| Average Offset Voltage Drift                    | Full                  | -        | 0.2  | 0.6 | $\mu\text{V}/^{\circ}\text{C}$ |
| Bias Current                                    | +25°C                 | -        | 1.2  | 6   | nA                             |
|   | Full                  | -        | 2.4  | 8   | nA                             |
| Bias Current Average Drift                      | Full                  | -        | 15   | 35  | $\text{pA}/^{\circ}\text{C}$   |
| Offset Current                                  | +25°C                 | -        | 0.6  | 6   | nA                             |
|   | Full                  | -        | 1.0  | 8   | nA                             |
| Offset Current Average Drift                    | Full                  | -        | 1.5  | 50  | $\text{pA}/^{\circ}\text{C}$   |
| Common Mode Range                               | Full                  | $\pm 12$ | -    | -   | V                              |
| Differential Input Resistance                   | +25°C                 | -        | 47   | -   | $\text{M}\Omega$               |
| Input Noise Voltage 0.1Hz to 10Hz               | +25°C                 | -        | 0.35 | 0.6 | $\mu\text{V}_{\text{p-p}}$     |
| Input Noise Voltage Density                     | $f_o = 10\text{Hz}$   | +25°C    | -    | 13  | $\text{nV}/\sqrt{\text{Hz}}$   |
|   | $f_o = 100\text{Hz}$  | +25°C    | -    | 10  | $\text{nV}/\sqrt{\text{Hz}}$   |
|   | $f_o = 1000\text{Hz}$ | +25°C    | -    | 9   | $\text{nV}/\sqrt{\text{Hz}}$   |
| Input Noise Current 0.1Hz to 10Hz               | +25°C                 | -        | 14   | 45  | $\text{pA}_{\text{p-p}}$       |
| Input Noise Current Density                     | $f_o = 10\text{Hz}$   | +25°C    | -    | 7.1 | $\text{pA}/\sqrt{\text{Hz}}$   |
|   | $f_o = 100\text{Hz}$  | +25°C    | -    | 3.3 | $\text{pA}/\sqrt{\text{Hz}}$   |
|   | $f_o = 1000\text{Hz}$ | +25°C    | -    | 1.2 | $\text{pA}/\sqrt{\text{Hz}}$   |
| <b>TRANSFER CHARACTERISTICS</b>                 |                       |          |      |     |                                |
| Large Signal Voltage Gain (Note 2)              | +25°C                 | 126      | 150  | -   | dB                             |
|   | Full                  | 120      | 140  | -   | dB                             |
| Common Mode Rejection Ratio (Note 3)            | Full                  | 110      | 140  | -   | dB                             |
| Closed Loop Bandwidth ( $A_{\text{VCL}} = +1$ ) | +25°C                 | 0.6      | 2    | -   | MHz                            |

2  
OPERATIONAL  
AMPLIFIERS

## Specifications HA-5177


### Electrical Specifications $V_+ = +15V, V_- = -15V$ , Unless Otherwise Specified (Continued)

| PARAMETER                             | TEMP  | HA-5177 |       |     | UNITS      |
|---------------------------------------|-------|---------|-------|-----|------------|
|                                       |       | MIN     | TYP   | MAX |            |
| <b>OUTPUT CHARACTERISTICS</b>         |       |         |       |     |            |
| Output Voltage Swing                  |       |         |       |     |            |
| $R_L = 600\Omega$                     | +25°C | ±10     | ±12.5 | -   | V          |
| $R_L = 2k\Omega$                      | +25°C | ±12     | ±13   | -   | V          |
| $R_L = 2k\Omega$                      | Full  | ±12     | ±12.5 | -   | V          |
| Full Power Bandwidth (Note 5)         | +25°C | 8       | 10    | -   | kHz        |
| Output Current (Note 6)               | +25°C | 15      | 20    | -   | mA         |
| Output Resistance                     | +25°C | -       | 60    | -   | $\Omega$   |
| <b>TRANSIENT RESPONSE</b>             |       |         |       |     |            |
| Rise Time (Note 10)                   | +25°C | -       | 310   | 420 | ns         |
| Slew Rate (Note 11)                   | +25°C | 0.5     | 0.8   | -   | V/ $\mu$ s |
| Settling Time (Notes 7, 8)            | +25°C | -       | 14    | -   | $\mu$ s    |
| Overshoot (Note 10)                   | +25°C | -       | 10    | 40  | %          |
| <b>POWER SUPPLY CHARACTERISTICS</b>   |       |         |       |     |            |
| Supply Current                        | Full  | -       | 1.2   | 1.7 | mA         |
| Power Supply Rejection Ratio (Note 9) | Full  | 110     | 135   | -   | dB         |

**NOTES:**

1. Absolute maximum ratings are limiting values, applied individually beyond which the serviceability of the circuit may be impaired. Functional operability under any of these conditions is not necessarily implied.
2.  $V_{OUT} = \pm 10V, R_L = 2k\Omega$ .
3.  $\Delta V_{CM} = \pm 10V$  D.C.
4.  $R_L = 2k\Omega$ .
5. Full power bandwidth guaranteed based on slew rate measurement using  $FPBW = \frac{\text{Slew Rate}}{2\pi V_{PEAK}}, V_{PEAK} = 10V$
6.  $V_{OUT} = \pm 10V$ .
7. Refer to test circuits section of the data sheet.
8. Settling time is measured to 0.1% of final value for a 10V output step and  $A_V = +1$ .
9.  $\Delta V_{SUPPLY} = \pm 10V$  D.C. to  $\pm 20V$  D.C.
10.  $A_V = 1, R_L = 2k\Omega, V_{OUT} = \pm 200mV$ .
11.  $A_V = 1, R_L = 2k\Omega, V_{OUT} = 0$  to  $\pm 3V$ .

**Schematic Diagram**

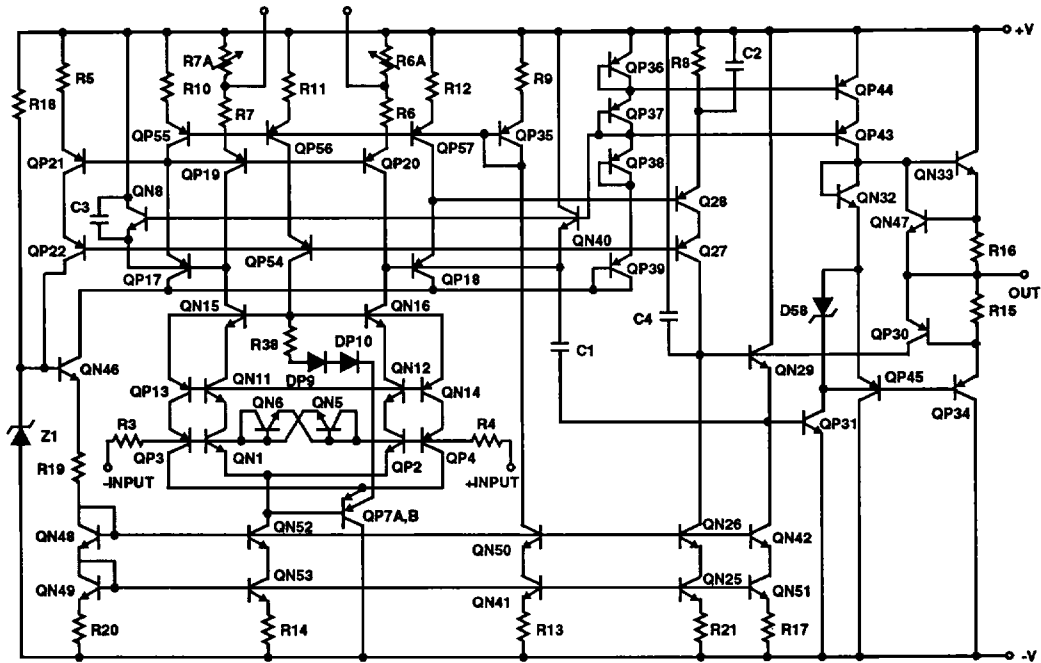

**2**  
OPERATIONAL  
AMPLIFIERS

**Die Characteristics**

|                            |   |               |
|----------------------------|---|---------------|
| Transistor Count .....     | 71  |               |
| Die Dimensions .....       | 102 x 71.7 x 19 mils<br>(2590 x 1820 x 485µm) |               |
| Substrate Potential* ..... | -V-   |               |
| Process .....              | High Frequency Bipolar DI                     |               |
| Passivation .....          | Silox   |               |
| Thermal Constants (°C/W)   | $\theta_{JA}$                                 | $\theta_{JC}$ |
| Ceramic Mini-DIP .....     | 113   | 34            |
| TO-99 Metal Can .....      | 124   | 38            |
| Plastic Mini DIP .....     | 92  | 30            |
| SOIC .....                 | 157   | 42            |

\* The substrate may be left floating (Insulating Die Mount) or it may be mounted on a conductor at V- potential.

Test Circuits




FIGURE 1. SLEW RATE AND TRANSIENT RESPONSE TEST CIRCUIT

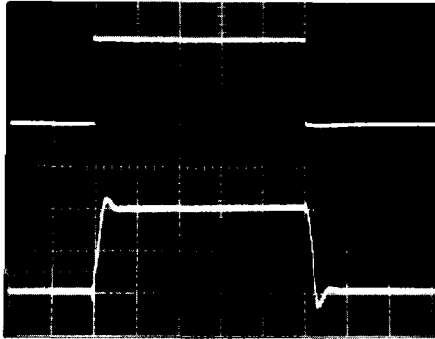


FIGURE 2. SMALL SIGNAL RESPONSE  
Vertical Scale: (Volts: 100mV/Div.)  
Horizontal Scale: (Time: 2μs/Div.)


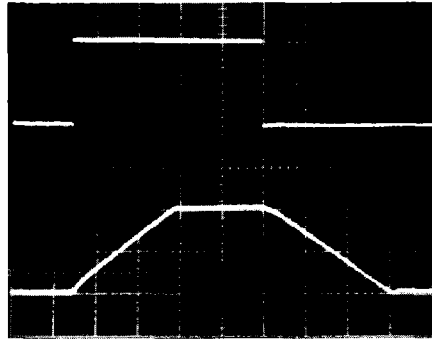


FIGURE 3. LARGE SIGNAL RESPONSE  
Vertical Scale: (Volts: 5V/Div.)  
Horizontal Scale: (Time: 5μs/Div.)

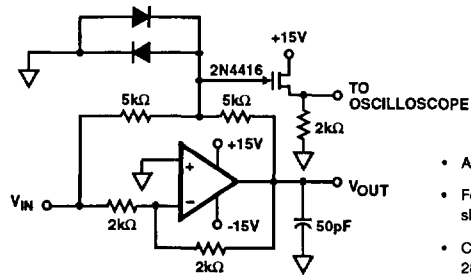

- $A_V = -1$
- Feedback and summing resistors should be 0.1% matched.
- Clipping diodes are optional. HP5082-2810 recommended.

FIGURE 4. SETTLING TIME CIRCUIT

Typical Performance Curves  $V_S = \pm 15V, T_A = +25^\circ C$

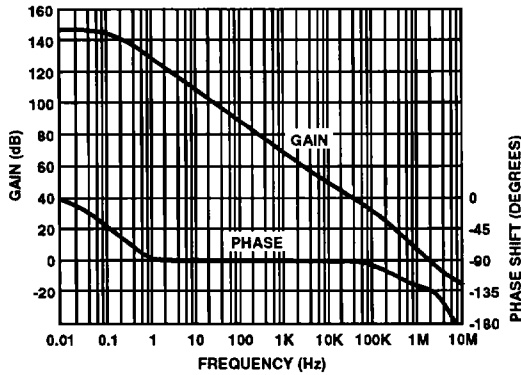


FIGURE 5. OPEN LOOP GAIN AND PHASE vs FREQUENCY

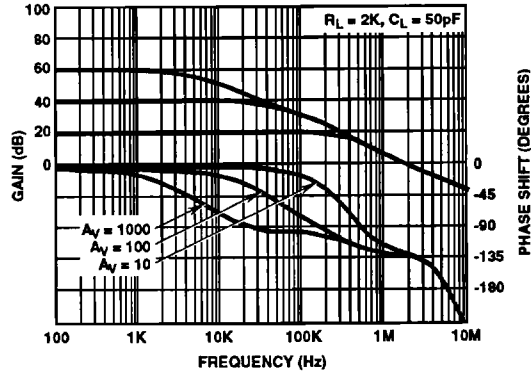


FIGURE 6. VARIOUS CLOSED LOOP GAINS vs FREQUENCY

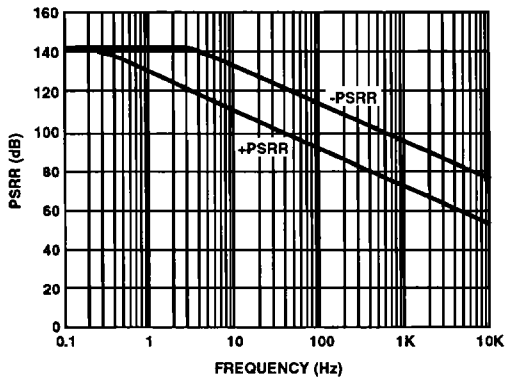


FIGURE 7. PSRR vs FREQUENCY

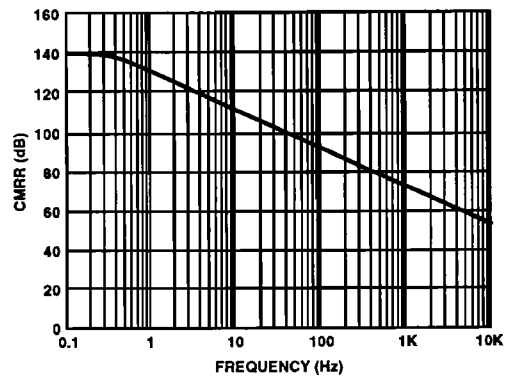


FIGURE 8. CMRR vs. FREQUENCY

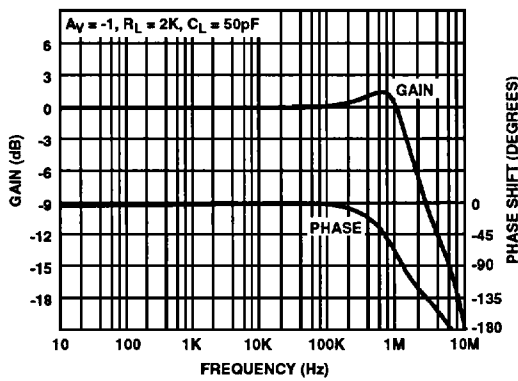


FIGURE 9. CLOSED LOOP GAIN AND PHASE vs. FREQUENCY

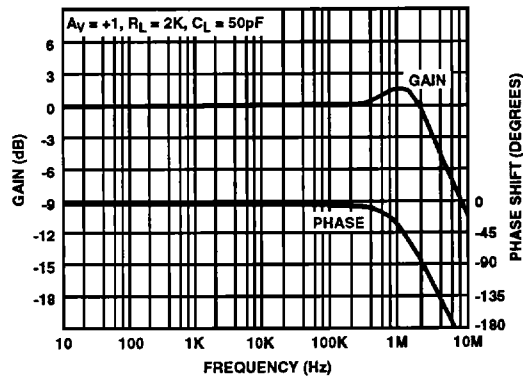


FIGURE 10. CLOSED LOOP GAIN AND PHASE vs. FREQUENCY

Typical Performance Curves  $V_S = \pm 15V, T_A = +25^\circ C$  (Continued)

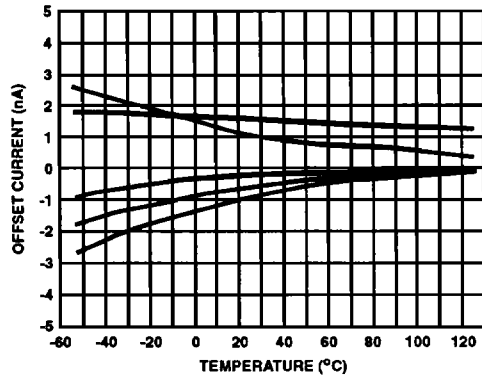


FIGURE 11. OFFSET CURRENT vs TEMPERATURE  
Five Representative Units

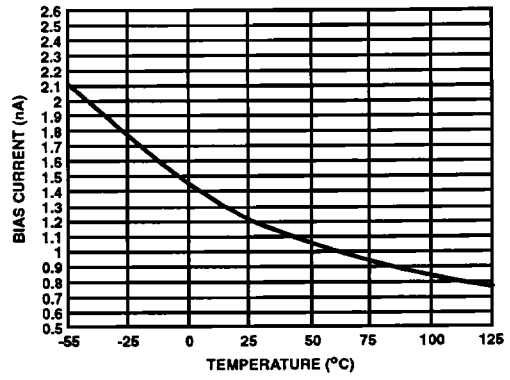


FIGURE 12. BIAS CURRENT vs TEMPERATURE

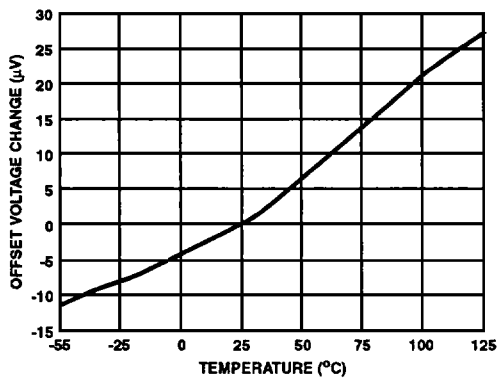


FIGURE 13. OFFSET VOLTAGE vs TEMPERATURE

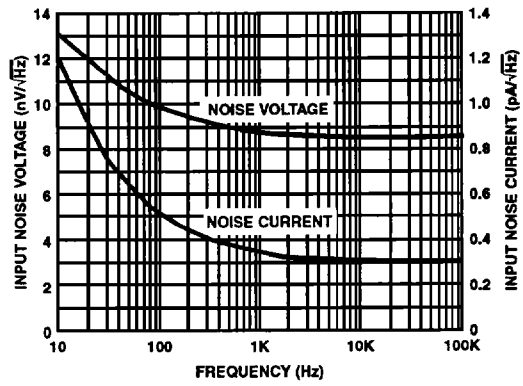


FIGURE 14. INPUT NOISE vs FREQUENCY

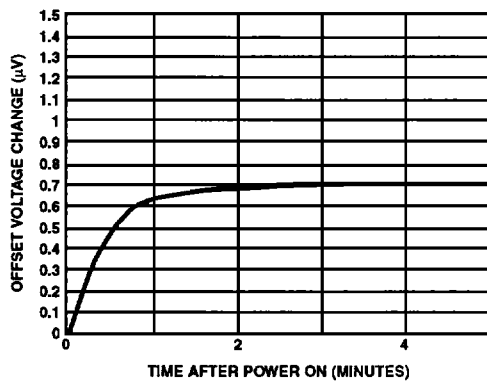


FIGURE 15. OFFSET VOLTAGE WARM-UP DRIFT

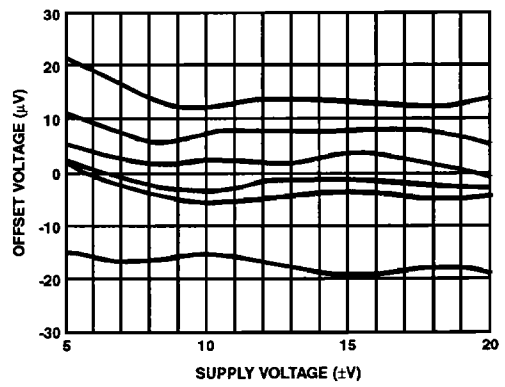


FIGURE 16. OFFSET VOLTAGE vs SUPPLY VOLTAGE  
Six Representative Units

Typical Performance Curves  $V_S = \pm 15V, T_A = +25^\circ C$  (Continued)

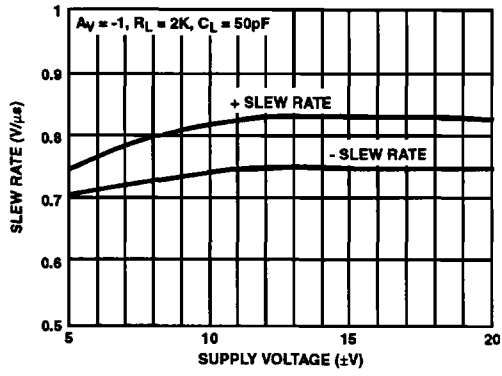


FIGURE 17. SLEW RATE vs. SUPPLY VOLTAGE

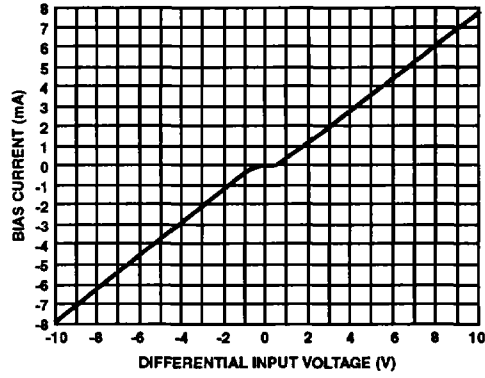


FIGURE 18. BIAS CURRENT vs DIFFERENTIAL INPUT VOLTAGE

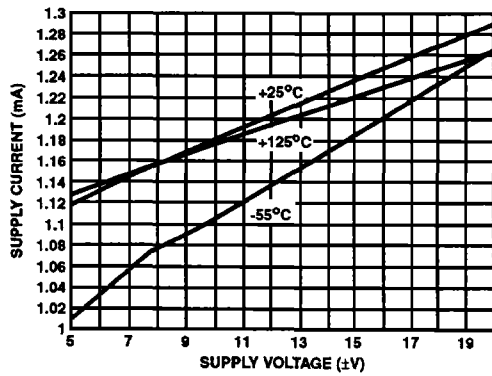


FIGURE 19. SUPPLY CURRENT vs SUPPLY VOLTAGE

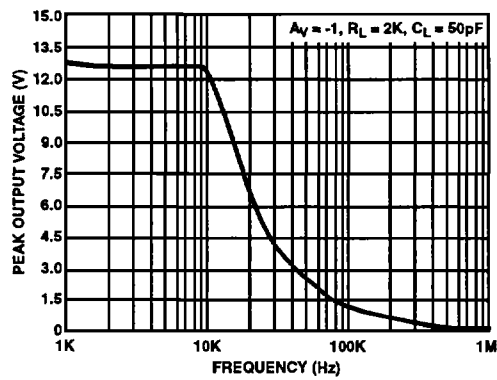


FIGURE 20. OUTPUT VOLTAGE vs FREQUENCY

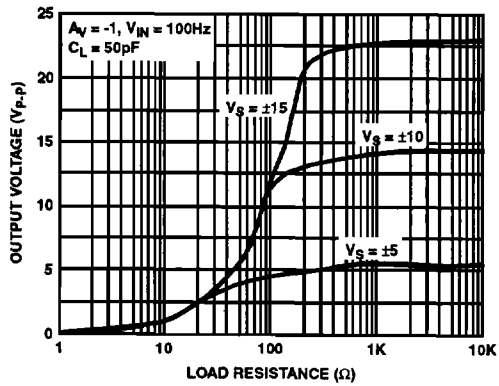


FIGURE 21. OUTPUT VOLTAGE vs LOAD RESISTANCE

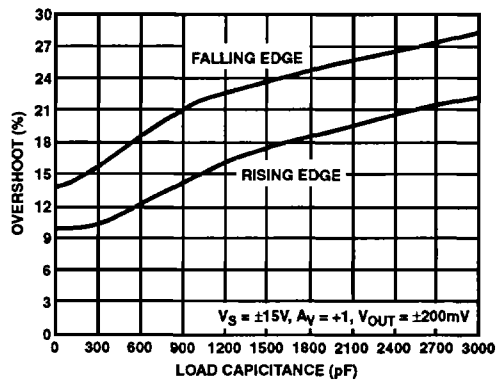


FIGURE 22. OVERSHOOT vs LOAD CAPACITANCE



Typical Performance Curves  $V_S = \pm 15V, T_A = +25^\circ C$  (Continued)

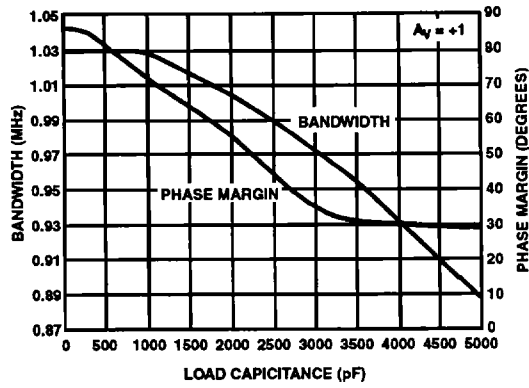


FIGURE 23. SMALL SIGNAL BANDWIDTH AND PHASE MARGIN

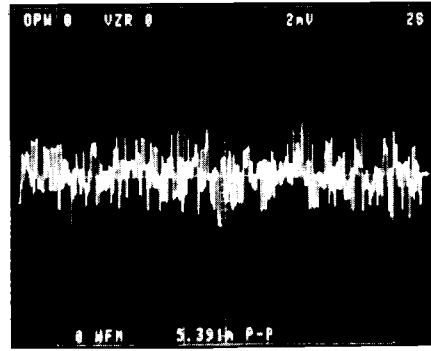


FIGURE 24. PEAK-TO-PEAK NOISE (0.1Hz TO 10Hz)  
 $A_V = 25,000, E_N = 0.22\mu V_{p-p} RTI$

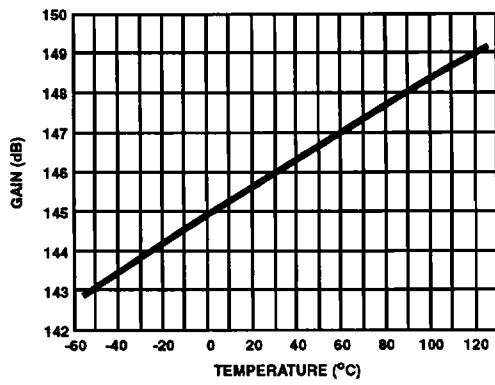


FIGURE 25. OPEN LOOP GAIN vs TEMPERATURE

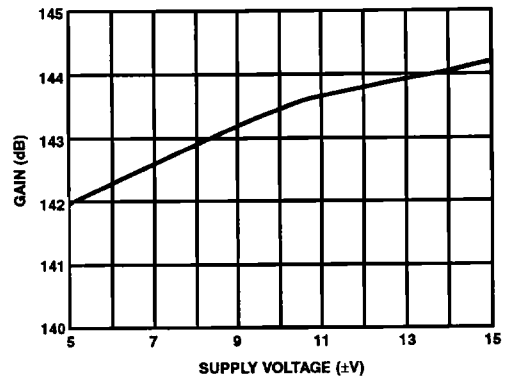


FIGURE 26. OPEN LOOP GAIN vs SUPPLY VOLTAGE

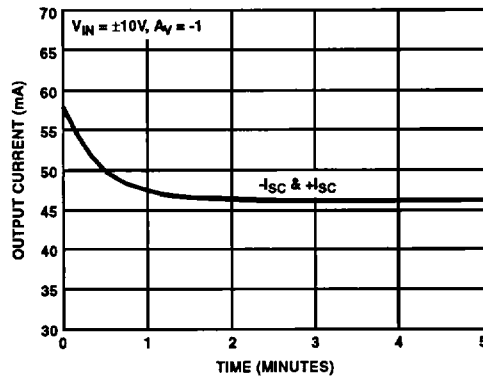


FIGURE 27. OUTPUT SHORT CIRCUIT CURRENT vs TIME


**Applications Information**

**Operation Below 15V Supply**

The HA-5177 performs well down to  $\pm 5V$  supplies. At  $\pm 5V$  supplies there is a slight degradation of slew rate and open loop gain. There is very little change in bias currents and offset voltage.

**Offset Adjustment**


The following is the recommended  $V_{IO}$  adjust configuration:



Setting  $R_P = 20K$  will give an adjustment range of  $\pm 2.6mV$ .

**Input Protection**

The HA-5177 input stage has built in back-to-back protection diodes with series current limiting resistors.



The Bias currents will increase when a differential voltage of 0.7 volts is exceeded.

The internal current limiting resistors sufficiently limit current therefore, no external resistors are required.

Refer to the "Bias Current vs Differential Input Voltage" curve in the Typical Performance Curves section