


# inspired LED *Infinity 2-Prong Screw Terminal*

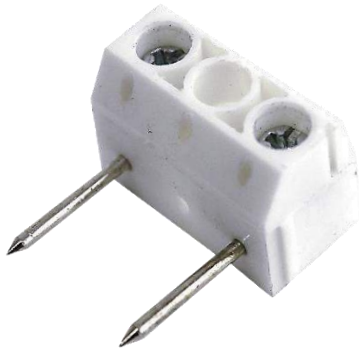

Inspired LED's **Solderless 2-Prong Screw Terminal** pairs with our Infinity Series Weather Resistant LED Dura-flex, terminating bare ends to cable. Sturdy prongs pierce the copper wiring on either side of flex to create a secure connection, while screw terminals allow cable to be run from strip to strip, or directly to power source.

SKU #3571

### **Product Features:**


Dual prongs extend from low-profile white plastic body, housing two Philips-head screw terminals

### **Specifications:**

**Dimensions-** 0.69" x 0.40" x 0.61"

**Net Weight-** 2 grams

**Max Load-** 6 AMPS

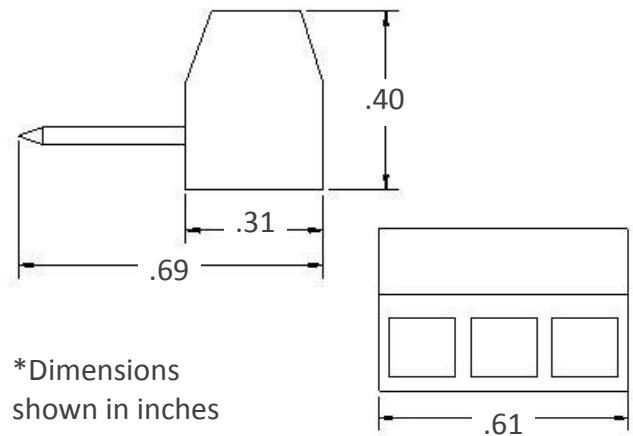


**Instructions:** To install, you will need Infinity flex, 2-prong screw terminals, solid 2-conductor outdoor-rated cable, wire strippers, outdoor-rated silicone, heat shrink (if desired)



1. Measure Infinity Series Dura-flex and cut to length according to instructions, taking note of polarity marked along the strip.



2. Align 2-prong screw terminal to small holes on sides of Infinity Dura-flex, and insert so that barbs pierce the copper wiring running along both sides.

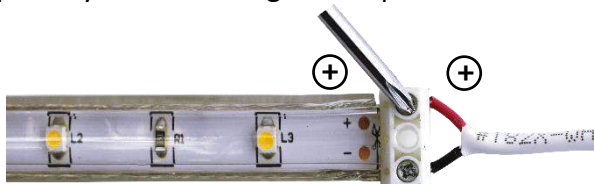

3. Open screw terminals, strip & insert wire (matching polarity of strip), then tighten screws back down. Repeat steps 2-3 to connect to next strips in series.



4. Use cable from first flex strip in series to wire nut back to power source. Reinforce connections with silicone or heat shrink.

