

E11508





Wirable socket

SDOGH040MSSFKPG

phase-out article

Alternative articles: EVC810

When selecting an alternative article and accessories please note that technical data may differ!

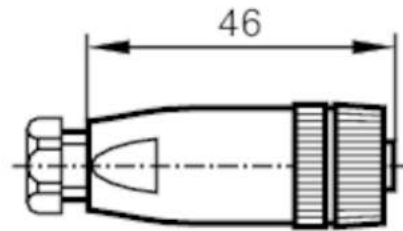

| Application | |
|-----------------------------|--|
| Special feature | Free from silicone; Gold-plated contacts |
| Free from silicone | yes |
| Electrical data | |
| Operating voltage [V] | < 45 AC / < 70 DC |
| Max. current load total [A] | 4; (...40 °C) |
| Operating conditions | |
| Ambient temperature [°C] | -25...85 |
| Protection | IP 68 |
| Mechanical data | |
| Weight [g] | 28.1 |
| Dimensions [mm] | 18 x 18 x 46 |
| Materials | PA |
| Moulded-body material | PA |
| Material nut | brass, nickel-plated |
| Remarks | |
| Pack quantity | 1 pcs. |

E11508



Wirable socket

SDOGH040MSSFKPG

Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm

Electrical connection - socket

Connector: 1 x M12, straight; coding: A; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

