

DDR5 SDRAM RDIMM Addendum


MTC18F1045S1PC – 32GB 16Gb Die Revision A

Features

Information provided here is in addition to or supersedes information provided in the Micron DDR5 RDIMM Core data sheet.

- DDR5 functionality and operations supported as defined in the component data sheet
- Features and specifications defined in the Micron DDR5 RDIMM core data sheet
- 288-pin, DDR5 registered dual in-line memory module (DDR5 RDIMM)
- Fast data transfer rate: PC5-4800
- 32GB (4Gig x 72)
- Single-rank
- 32 internal banks; 8 groups of 4 banks each

Figure 1: 288-Pin DDR5 RDIMM (R/C-F0)

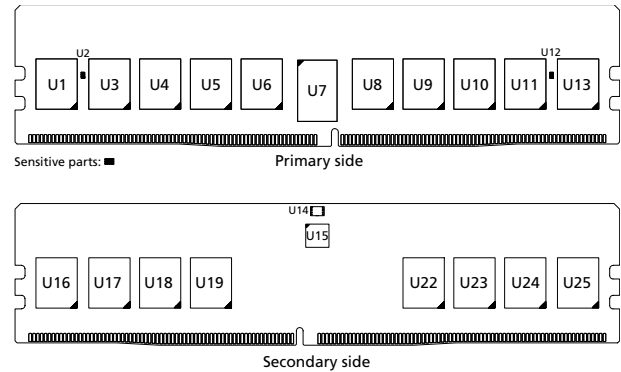

Options

- Operating temperature
 - Commercial ($0^{\circ}\text{C} \leq T_{\text{OPER}} \leq 95^{\circ}\text{C}$)
- Frequency/CAS latency
 - 0.416ns @ CL = 40 (DDR5-4800)

Marking

C
 48B

Table 1: Addressing

Parameter	32GB
Row address ¹	64K (R0-R15)
Column address ¹	2K (C0-C10)
Device bank group address ¹	8 (BG0-BG2)
Device bank address per bank group ¹	4 (BA0-BA1)
Device configuration	16Gb (4Gb x 4), 32 banks
Module rank address	1 (CS0_n)

Notes: 1. These parameters represent the logical address state of the CA bus for different commands. Refer to the command truth table in the component data sheet.

Table 2: Part Numbers and Timing Parameters – 32GB Modules

Base device: MT60B4G4,¹ 16Gb DDR5 SDRAM Die Revision A

Part Number	Module Density	Configuration	Module Bandwidth	Memory Clock/ Data Rate	Clock Cycles (CL _{-n} ,RCD _{-n} ,RP)
MTC18F1045S1PC48BA2	32GB	4Gb x 72 (EC4)	38.4 GB/s	0.416ns/4800 MT/s	40-39-39

Notes: 1. The data sheet for the base device can be found on micron.com.



Important Notes and Warnings

Micron Technology, Inc. ("Micron") reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions. This document supersedes and replaces all information supplied prior to the publication hereof. You may not rely on any information set forth in this document if you obtain the product described herein from any unauthorized distributor or other source not authorized by Micron.

Automotive Applications. Products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets. Distributor and customer/distributor shall assume the sole risk and liability for and shall indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting directly or indirectly from any use of non-automotive-grade products in automotive applications. Customer/distributor shall ensure that the terms and conditions of sale between customer/distributor and any customer of distributor/customer (1) state that Micron products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets and (2) require such customer of distributor/customer to indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting from any use of non-automotive-grade products in automotive applications.

Critical Applications. Products are not authorized for use in applications in which failure of the Micron component could result, directly or indirectly in death, personal injury, or severe property or environmental damage ("Critical Applications"). Customer must protect against death, personal injury, and severe property and environmental damage by incorporating safety design measures into customer's applications to ensure that failure of the Micron component will not result in such harms. Should customer or distributor purchase, use, or sell any Micron component for any critical application, customer and distributor shall indemnify and hold harmless Micron and its subsidiaries, subcontractors, and affiliates and the directors, officers, and employees of each against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, or death arising in any way out of such critical application, whether or not Micron or its subsidiaries, subcontractors, or affiliates were negligent in the design, manufacture, or warning of the Micron product.

Customer Responsibility. Customers are responsible for the design, manufacture, and operation of their systems, applications, and products using Micron products. ALL SEMICONDUCTOR PRODUCTS HAVE INHERENT FAILURE RATES AND LIMITED USEFUL LIVES. IT IS THE CUSTOMER'S SOLE RESPONSIBILITY TO DETERMINE WHETHER THE MICRON PRODUCT IS SUITABLE AND FIT FOR THE CUSTOMER'S SYSTEM, APPLICATION, OR PRODUCT. Customers must ensure that adequate design, manufacturing, and operating safeguards are included in customer's applications and products to eliminate the risk that personal injury, death, or severe property or environmental damages will result from failure of any semiconductor component.

Limited Warranty. In no event shall Micron be liable for any indirect, incidental, punitive, special or consequential damages (including without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort, warranty, breach of contract or other legal theory, unless explicitly stated in a written agreement executed by Micron's duly authorized representative.



DQ Map

Table 3: Component-to-Module DQ Map

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U1	0	3A	154	U3	0	11A	165
	1	0A	7		1	8A	18
	2	1A	9		2	9A	20
	3	2A	152		3	10A	163
U4	0	19A	176	U5	0	27A	187
	1	16A	29		1	24A	40
	2	17A	31		2	25A	42
	3	18A	174		3	26A	185
U6	0	CB3A	198	U8	0	CB3B	243
	1	CB0A	51		1	CB0B	96
	2	CB1A	53		2	CB1B	98
	3	CB2A	196		3	CB2B	241
U9	0	7B	254	U10	0	15B	265
	1	4B	107		1	12B	118
	2	5B	109		2	13B	120
	3	6B	252		3	14B	263
U11	0	23B	276	U13	0	31B	287
	1	20B	129		1	28B	140
	2	21B	131		2	29B	142
	3	22B	274		3	30B	285
U16	0	24B	133	U17	0	16B	122
	1	27B	280		1	19B	269
	2	26B	278		2	18B	267
	3	25B	135		3	17B	124
U18	0	8B	111	U19	0	0B	100
	1	11B	258		1	3B	247
	2	10B	256		2	2B	245
	3	9B	113		3	1B	102
U22	0	28A	47	U23	0	20A	36
	1	31A	194		1	23A	183
	2	30A	192		2	22A	181
	3	29A	49		3	21A	38



Table 3: Component-to-Module DQ Map (Continued)

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U24	0	12A	25	U25	0	4A	14
	1	15A	172		1	7A	161
	2	14A	170		2	6A	159
	3	13A	27		3	5A	16



I_{DD} Specifications


Table 4: DDR5 I_{DD} Specifications and Conditions – 32GB (Die Revision A)

Module I_{DD} is based on PMIC VIN_BULK 12V input current and typical operating range of temperature. Each I_{DD} parameter includes PMIC efficiency, RCD current and all DRAM current on all supplies (V_{DD}, V_{DDQ}, and V_{PP}).

Parameter	Symbol	4800	Units
Operating one bank ACTIVATE-PRECHARGE current	I _{DD0}	182	mA
Operating four bank ACTIVATE-PRECHARGE current	I _{DD0F}	261	mA
Precharge standby current	I _{DD2N}	152	mA
Precharge standby non-target command	I _{DD2NT}	294	mA
Precharge power-down current	I _{DD2P}	139	mA
Active standby current	I _{DD3N}	153	mA
Active power-down current	I _{DD3P}	153	mA
Operating burst read current	I _{DD4R}	574	mA
Operating burst write current	I _{DD4W}	729	mA
Operating burst write with write CRC current	I _{DD4WC}	748	mA
Burst refresh (normal refresh mode) current	I _{DD5B}	451	mA
Burst refresh (fine granularity refresh mode) current	I _{DD5F}	294	mA
Burst refresh (same bank refresh mode) current	I _{DD5C}	225	mA
Self refresh current	I _{DD6N}	63	mA
Operating bank interleave read current	I _{DD7}	674	mA
Maximum power saving deep power down mode current	I _{DD8}	65	mA

Functional Block Diagram

Figure 2: Functional Block Diagram

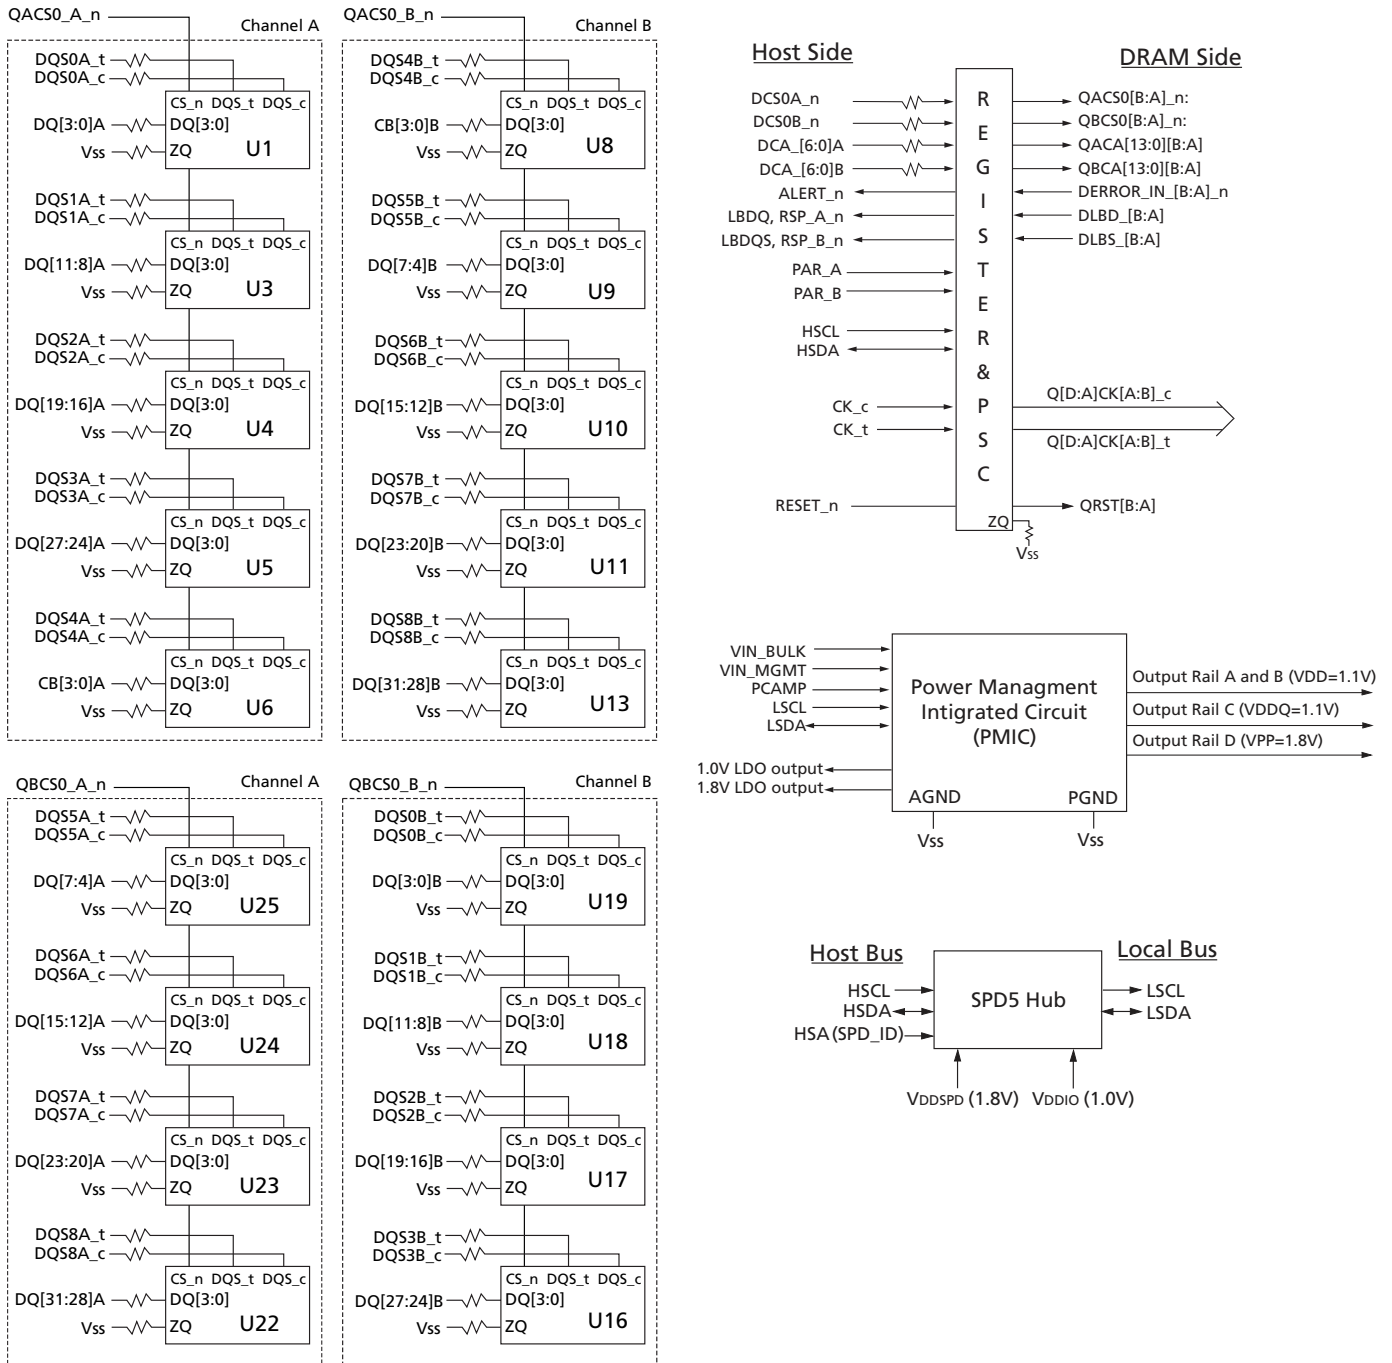

- Notes:
1. The ZQ ball on each DDR5 component is connected to an external $240\Omega \pm 1\%$ resistor that is tied to ground. It is used for the calibration of the component's ODT and output driver.
 2. Functional block diagram is for reference only.



Revision History

Rev. C – 09/2021

- Production Release - MPN changed from MTC18F1045S1RC to MTC18F1045S1PC to indicate x72I/O width

Rev. B – 06/2020

- Preliminary Release

Rev. A – 06/2020

- Preliminary Release

8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006
208-368-4000, micron.com/support

Micron and the Micron logo are trademarks of Micron Technology, Inc.
All other trademarks are the property of their respective owners.

This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.