

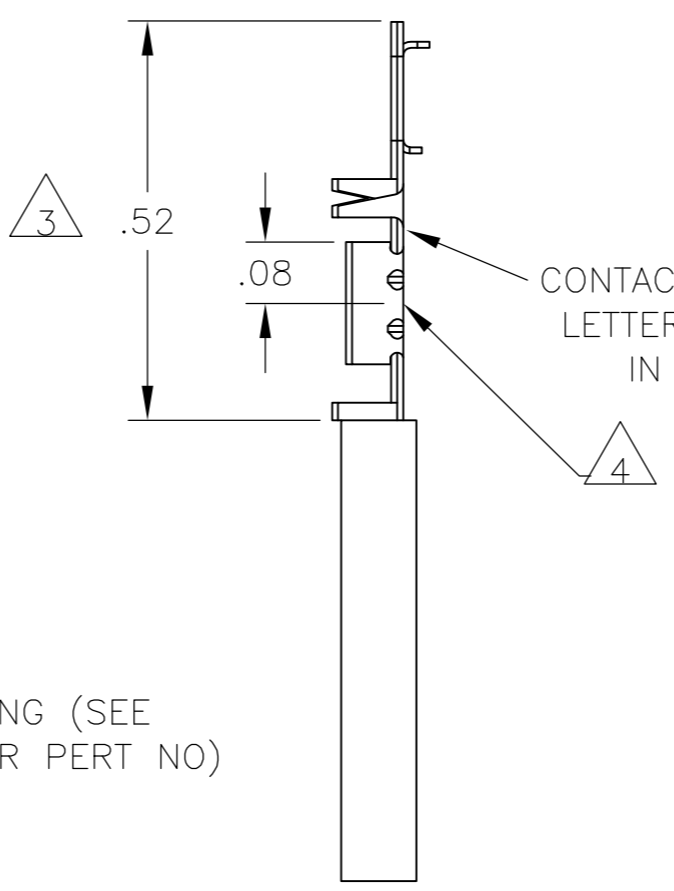
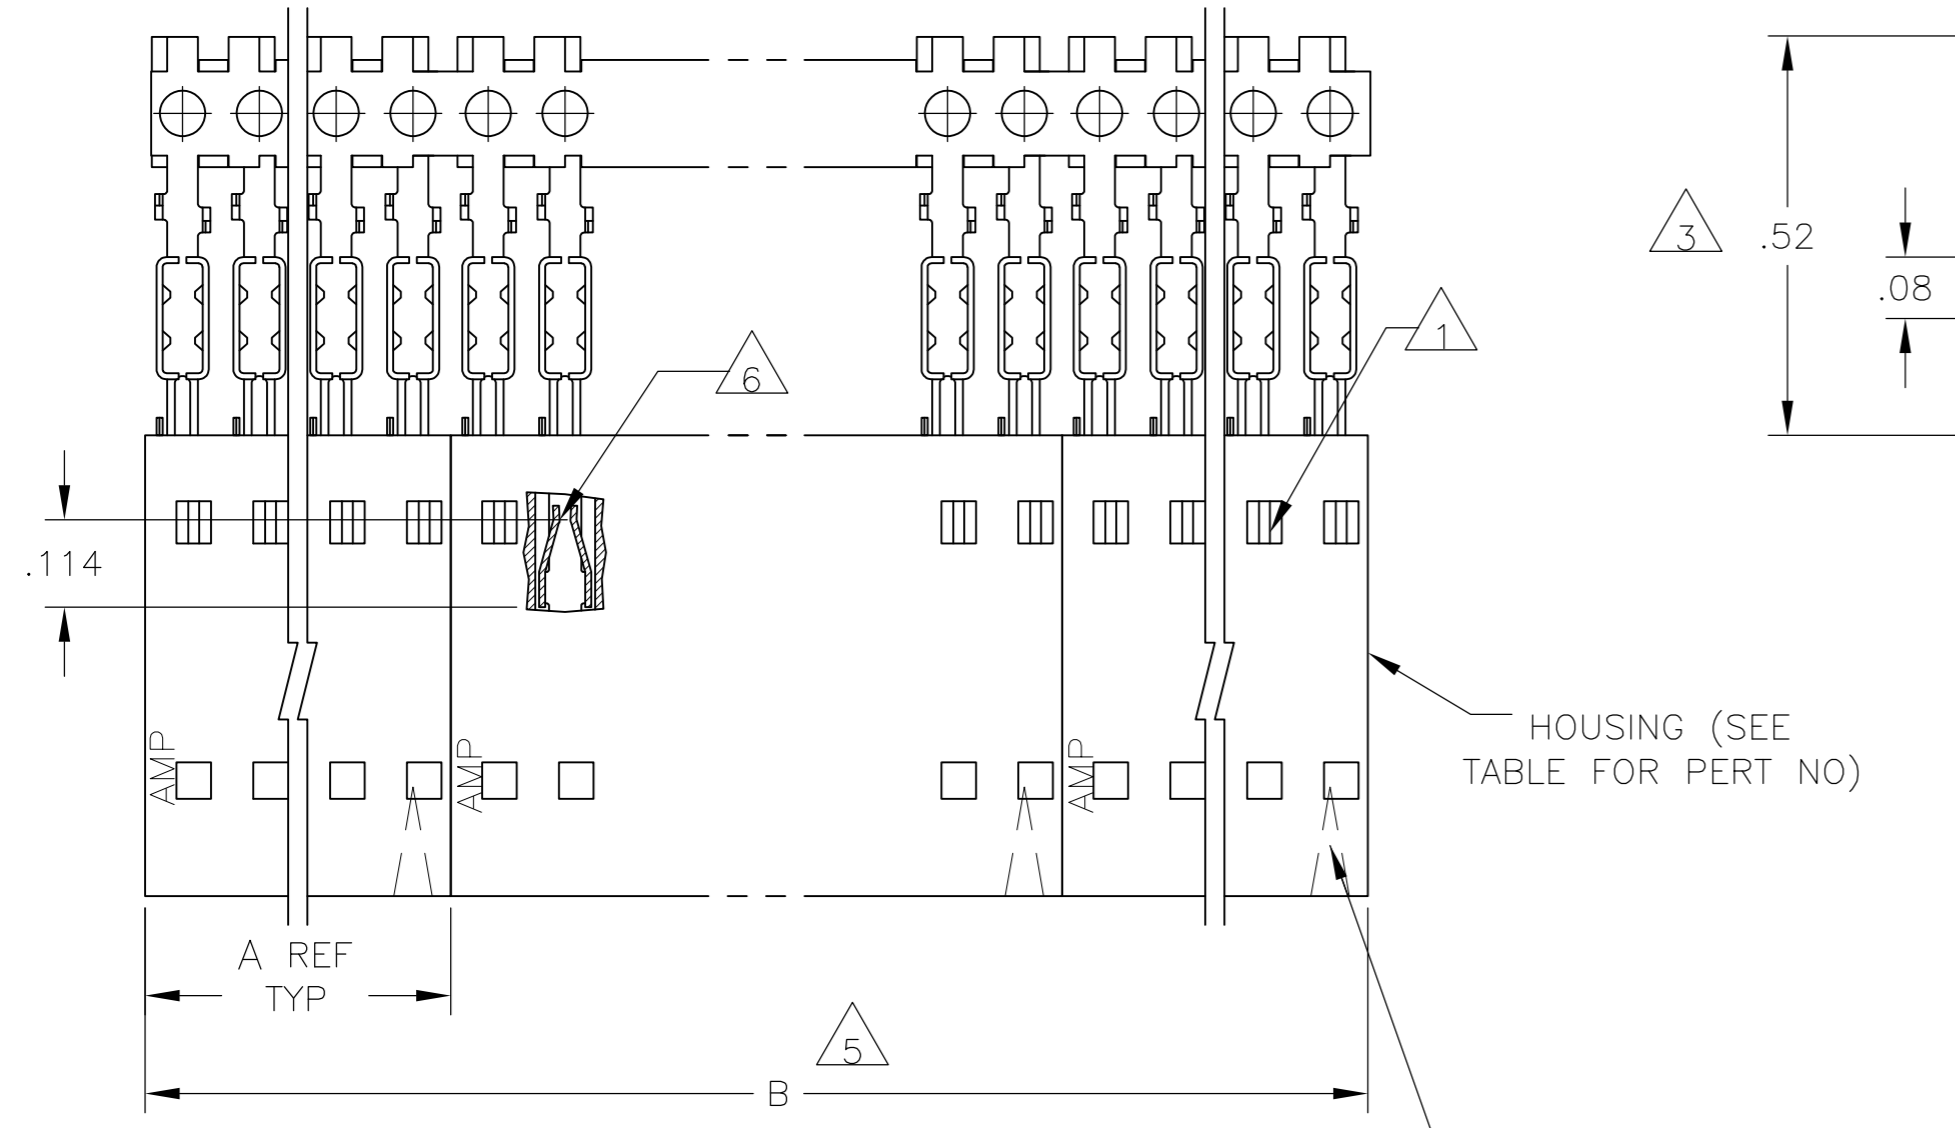


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	K2	REVISED PER ECO-10-021086		18OCT10	HMR	JG	

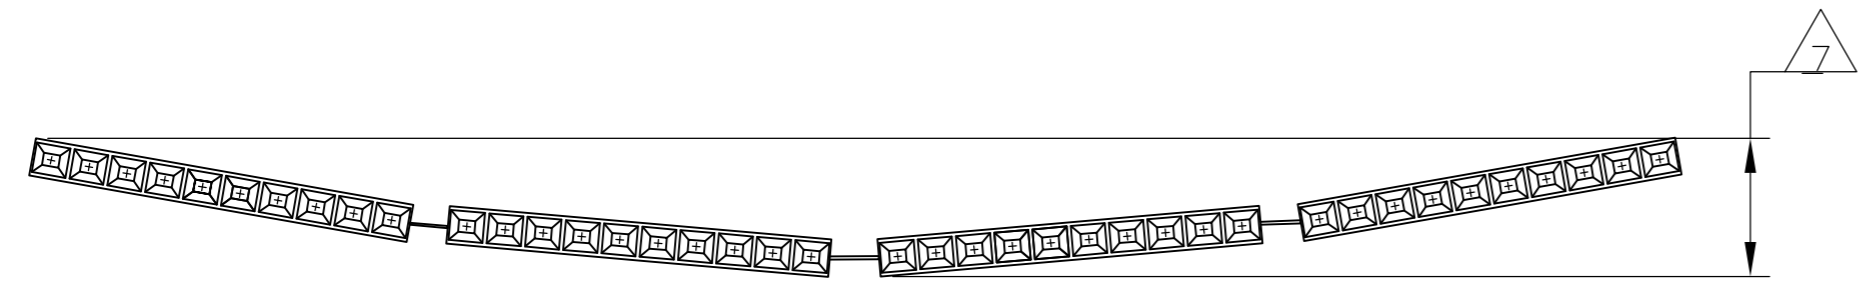

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 8 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

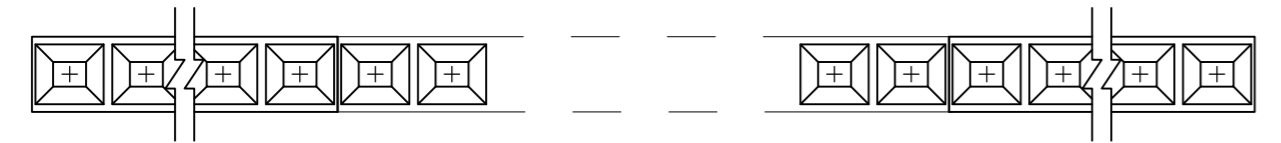

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

PLATING	5	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP
OBSOLETE	9	2	2.40	1-103688-1	12	6-104439-1
OBSOLETE	9	2	2.20	1-103688-0	11	6-104439-0
OBSOLETE	9	2	2.00	103688-9	10	5-104439-9
OBSOLETE	9	2	1.80	103688-8	9	5-104439-8
OBSOLETE	9	2	1.60	103688-7	8	5-104439-7
OBSOLETE	9	2	1.40	103688-6	7	5-104439-6
OBSOLETE	9	4	2.39	103688-5	6	5-104439-5
OBSOLETE	9	4	1.99	103688-4	5	5-104439-4
OBSOLETE	9	5	1.99	103688-3	4	5-104439-3
OBSOLETE	9	5	1.49	103688-2	3	5-104439-2
OBSOLETE	9	10	1.98	103688-1	2	5-104439-1
OBSOLETE	8	2	2.40	1-103688-1	12	1-104439-1
OBSOLETE	8	2	2.20	1-103688-0	11	1-104439-0
OBSOLETE	8	2	2.00	103688-9	10	104439-9
OBSOLETE	8	2	1.80	103688-8	9	104439-8
OBSOLETE	8	2	1.60	103688-7	8	104439-7
OBSOLETE	8	2	1.40	103688-6	7	104439-6
OBSOLETE	8	4	2.39	103688-5	6	104439-5
OBSOLETE	8	4	1.99	103688-4	5	104439-4
OBSOLETE	8	5	1.99	103688-3	4	104439-3
OBSOLETE	8	5	1.49	103688-2	3	104439-2
OBSOLETE	8	10	1.98	103688-1	2	104439-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN M PASTAL 05APR05
 CHK J GESFORD 05APR05
 APVD J GESFORD 05APR05

tyco Electronics Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, HIGH PRESSURE, STRIP FORM, FOR #22-#26 AWG WIRE SIZE

PRODUCT SPEC 108-25034
 APPLICATION SPEC 114-25026

SIZE A2 CAGE CODE 00779 DRAWING NO C=104439 RESTRICTED TO -

WEIGHT -
 FINISH SEE TABLE
 MATERIAL: FLAME RETARDANT THERMOPLASTIC COLOR: BLACK CONTACTS: PHOS BRONZE

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV K2