



0910 – 150M

150 Watts - 48 Volts, 150 μ s, 5%
Radar 890 - 1000 MHz


GENERAL DESCRIPTION

The 0910-150M is an internally matched, COMMON BASE transistor capable of providing 150 Watts of pulsed RF output power at 150 μ s pulse width, 5% duty factor across the band 890 to 1000 MHz. This hermetically solder-sealed transistor is specifically designed for P-Band radar applications. It utilizes gold metallization to provide high reliability.

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C	400 Watts
Maximum Voltage and Current	
BVces Collector to Emitter Voltage	65 Volts
BVebo Emitter to Base Voltage	3.5 Volts
Ic Collector Current	12 Amps
Maximum Temperatures	
Storage Temperature	- 65 to + 200°C
Operating Junction Temperature	+ 200°C

CASE OUTLINE 55KT, STYLE 1

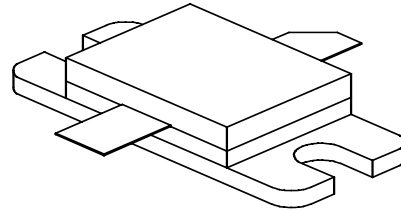

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	Freq = 890 – 1000 MHz	150		210	Watts
Pg	Power Gain	Vcc = 48 Volts	8.1	8.5		dB
ηc	Collector Efficiency	Pin = 23 Watts	40	45		%
Pd	Pulse Droop	Pulse Width = 150 μ s			0.5	dB
RI	Input Return loss	Duty Factor = 5%	-9			dB
VSWR¹	Load Mismatch Tolerance				3:1	
VSWRs	Load Mismatch - Stability				2:1	

Note 1: Pulse condition of 150 μ sec, 5%.




Bvces	Collector to Emitter Breakdown	Ic = 10 mA	65			Volts
Ices	Collector to Emitter Leakage	Vce = 50 Volts			10	mA
Iebo	Emitter to Base Leakage	Vebo = 2.5 Volts			5.0	mA
θjc¹	Thermal Resistance	Rated Pulse Condition			0.48	°C/W

Issue Mar 2005




0910-150M

Performance Curves –

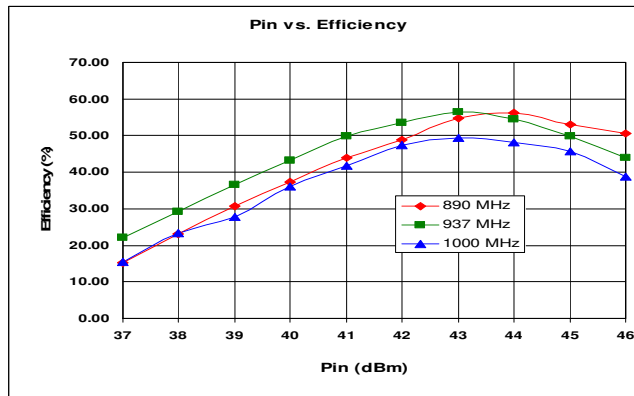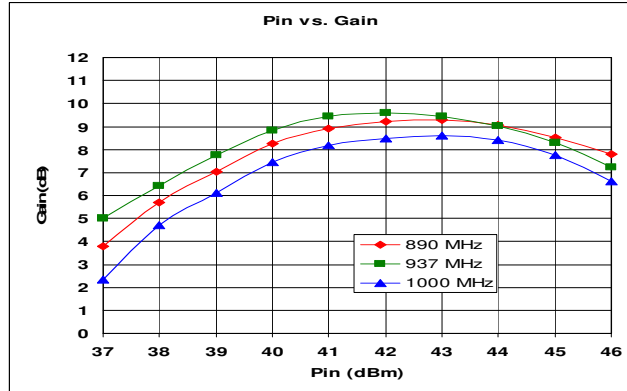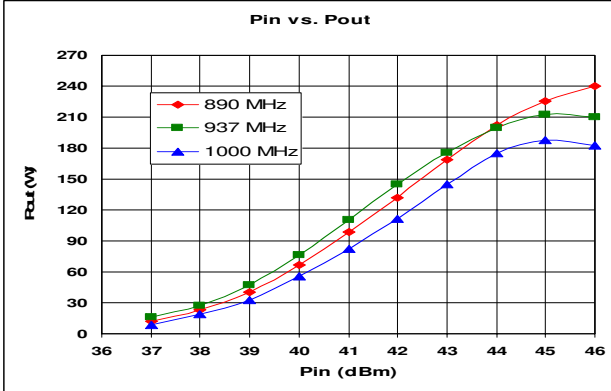

Impedance Information

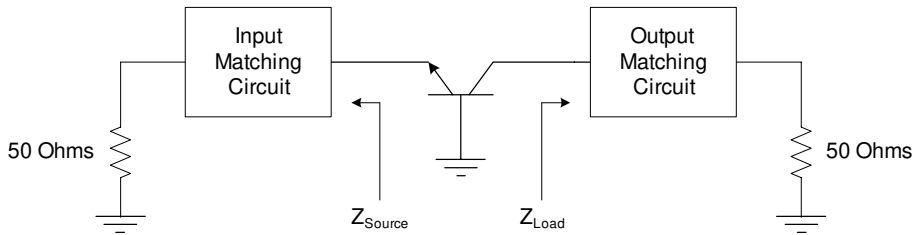


Frequencies (MHz)	$Z_{Source} (\Omega)$	$Z_{Load} (\Omega)^2$
890	4.0 - j4.2	1.85 - j3.2
937	4.0 - j3.5	1.97 - j3.0
1000	4.1 - j2.5	2.1 - j3.0

Note 2: Z_{Load} exclusive of C1 and C4 on the test circuit



0910-150M

Test Circuit

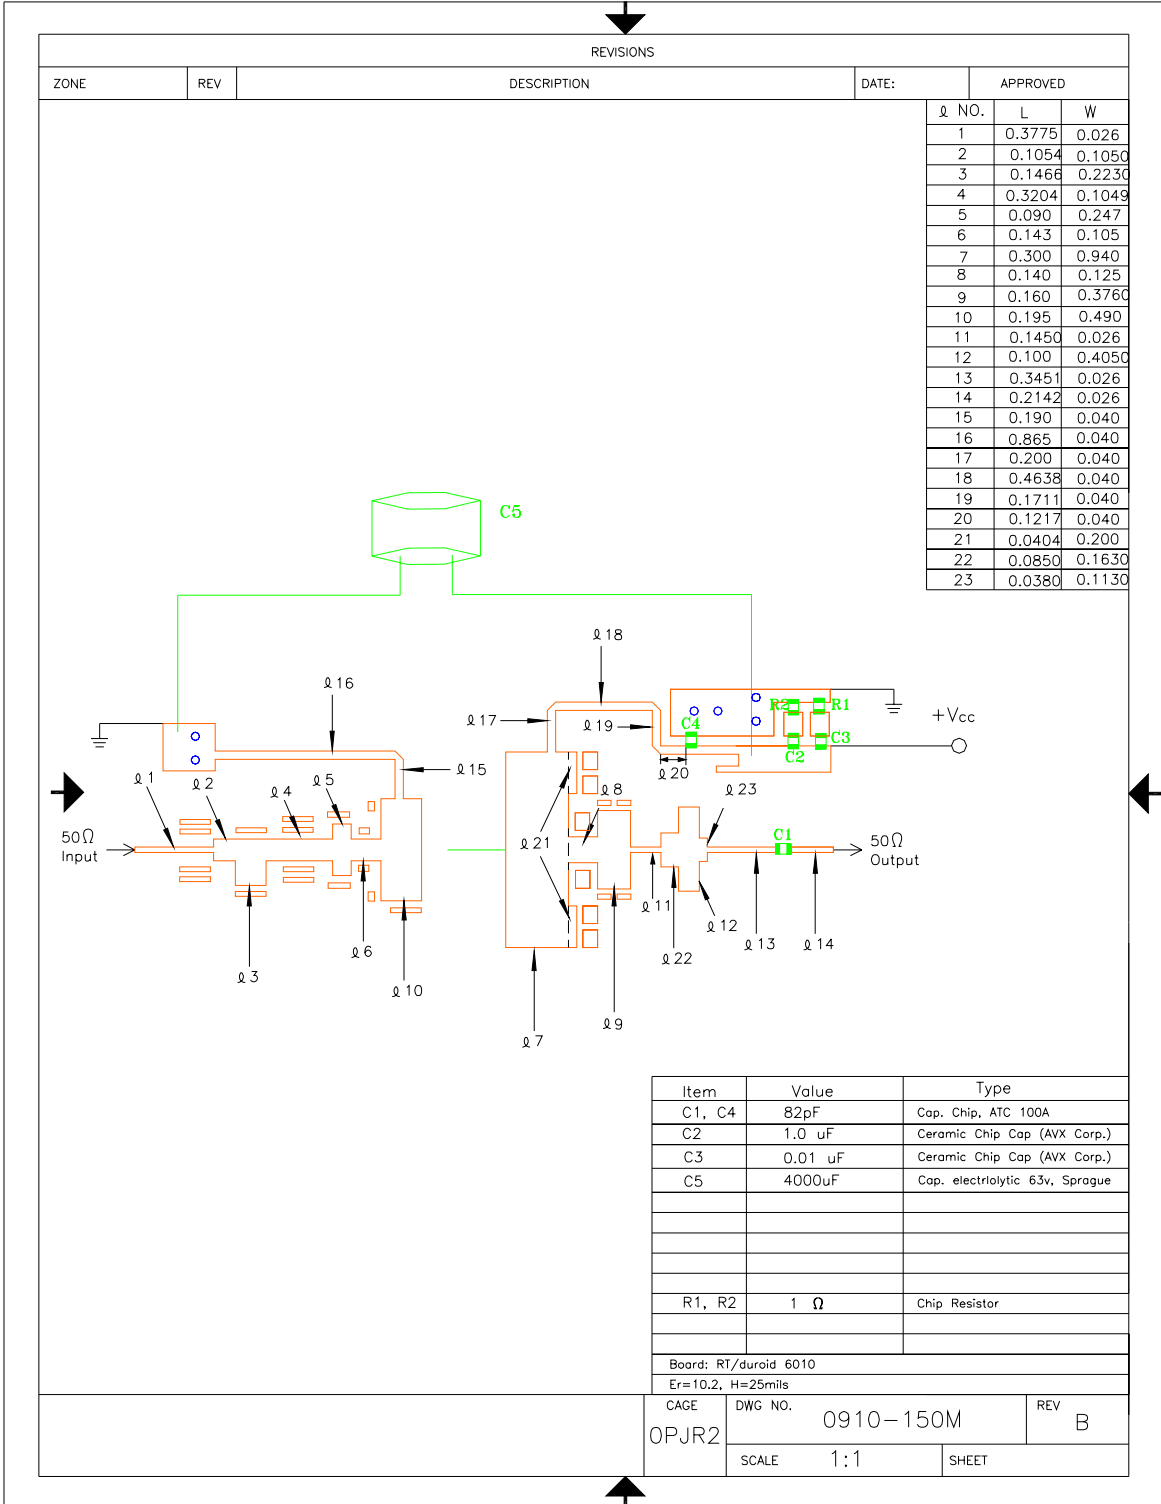

ADVANCED POWER TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. TO VERIFY THE CURRENT VERSION PLEASE CHECK OUR WEB SITE AT WWW.ADVANCEDPOWER.COM OR CONTACT OUR FACTORY DIRECT. Advanced Power Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 /869-2324



0910-150M

Case Outline

REVISIONS																																																																										
ZONE	REV	DESCRIPTION	DATE	APPROVED																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>DIM</th> <th>MILLIMETER</th> <th>± TOL</th> <th>INCHES</th> <th>±TOL</th> </tr> </thead> <tbody> <tr><td>A</td><td>10.16</td><td>.13</td><td>.400</td><td>.005</td></tr> <tr><td>B</td><td>20.32</td><td>.76</td><td>.800</td><td>.030</td></tr> <tr><td>C</td><td>9.78</td><td>.13</td><td>.385</td><td>.005</td></tr> <tr><td>D</td><td>12.70</td><td>.13</td><td>.500</td><td>.005</td></tr> <tr><td>E</td><td>1.52R</td><td>.13</td><td>.060R</td><td>.005</td></tr> <tr><td>F</td><td>1.52R</td><td>.13</td><td>.060R</td><td>.005</td></tr> <tr><td>G</td><td>3.81</td><td>.13</td><td>.150</td><td>.005</td></tr> <tr><td>H</td><td>5.84</td><td>MAX</td><td>.230</td><td>MAX</td></tr> <tr><td>I</td><td>1.52</td><td>.13</td><td>.060</td><td>.005</td></tr> <tr><td>J</td><td>17.78</td><td>.13</td><td>.700</td><td>.005</td></tr> <tr><td>K</td><td>22.86</td><td>.13</td><td>.900</td><td>.005</td></tr> <tr><td>M</td><td>3.05</td><td>.13</td><td>.120</td><td>.010</td></tr> <tr><td>N</td><td>0.08</td><td>$\begin{matrix} +.05 \\ -.03 \end{matrix}$</td><td>.003</td><td>$\begin{matrix} +.002 \\ -.001 \end{matrix}$</td></tr> </tbody> </table>					DIM	MILLIMETER	± TOL	INCHES	±TOL	A	10.16	.13	.400	.005	B	20.32	.76	.800	.030	C	9.78	.13	.385	.005	D	12.70	.13	.500	.005	E	1.52R	.13	.060R	.005	F	1.52R	.13	.060R	.005	G	3.81	.13	.150	.005	H	5.84	MAX	.230	MAX	I	1.52	.13	.060	.005	J	17.78	.13	.700	.005	K	22.86	.13	.900	.005	M	3.05	.13	.120	.010	N	0.08	$\begin{matrix} +.05 \\ -.03 \end{matrix}$.003	$\begin{matrix} +.002 \\ -.001 \end{matrix}$
DIM	MILLIMETER	± TOL	INCHES	±TOL																																																																						
A	10.16	.13	.400	.005																																																																						
B	20.32	.76	.800	.030																																																																						
C	9.78	.13	.385	.005																																																																						
D	12.70	.13	.500	.005																																																																						
E	1.52R	.13	.060R	.005																																																																						
F	1.52R	.13	.060R	.005																																																																						
G	3.81	.13	.150	.005																																																																						
H	5.84	MAX	.230	MAX																																																																						
I	1.52	.13	.060	.005																																																																						
J	17.78	.13	.700	.005																																																																						
K	22.86	.13	.900	.005																																																																						
M	3.05	.13	.120	.010																																																																						
N	0.08	$\begin{matrix} +.05 \\ -.03 \end{matrix}$.003	$\begin{matrix} +.002 \\ -.001 \end{matrix}$																																																																						
<p>STYLE 1: PIN1 = COLLECTOR 2 = BASE 3 = EMITTER</p> <p>STYLE 2: PIN1 = COLLECTOR 2 = EMITTER 3 = BASE</p>																																																																										
		CAGE	DWG. NO.	REV																																																																						
		0PJ2	55KT	E																																																																						
		SCALE	2/1	SHEET																																																																						