



# Bridgelux® Gen 8 Vero® 10 Array

Product Data Sheet DS420



# Introduction

Vero® Series



The Vero® Series is a revolutionary advancement in chip on board (COB) light source technology and innovation, simplifying the luminaire design and manufacturing processes. Vero Chip on Board (COB) LED arrays are available in four LES configurations, engineered to enable new degrees of flexibility and reliability over a broad range of electrical currents. Vero arrays deliver increased lumen density to enable improved beam control and precision lighting with 2 and 3 SDCM color control standard for clean and consistent uniform lighting.

Vero products include an onboard connector port that enables a solder-free electrical interconnect, and simple mounting features for plug-and-play installation.

## Features

- On board connector port
- Top side part number markings
- Efficacy of 178 lm/W typical, 3000K 80 CRI
- Reliable operation at up to 3x nominal current, 30% increase in maximum lumens per LES size
- Wide selection of CCT options (2700K-6500K) with minimum 70, 80 and 90 CRI options
- Uniform high-quality illumination
- 2 and 3 SDCM binning options (2700K – 4000K)
- Forward voltage bin codes (backside marking)
- Thermally isolated solder pads
- 10-Year warranty

## Benefits

- Solder free installation and field upgradability
- Improved inventory management and quality control
- Enables high efficiency lighting systems and lower operating costs
- Supports the trend toward luminaire miniaturization and delivers enhanced optical control
- Design flexibility for a broad range of lighting applications
- Clean white light without pixelation
- Uniform consistent white light
- Design flexibility for multi-source applications
- Enhanced ease of use and installation
- Design with confidence




# Contents

|   |    |
|---|----|
| Product Feature Map                           | 2  |
| Product Nomenclature                          | 2  |
| Product Selection Guide                       | 3  |
| European Product Registry for Energy Labeling | 4  |
| Performance at Commonly Used Drive Currents   | 10 |
| Electrical Characteristics                    | 20 |
| Eye Safety                                    | 21 |
| Absolute Maximum Ratings                      | 22 |
| Performance Curves                            | 23 |
| Typical Radiation Pattern                     | 25 |
| Typical Color Spectrum                        | 26 |
| Mechanical Dimensions                         | 27 |
| Color Binning Information                     | 28 |
| Packaging and Labeling                        | 29 |
| Design Resources                              | 31 |
| Precautions                                   | 31 |
| Disclaimers                                   | 31 |
| About Bridgelux                               | 32 |

# Product Feature Map


Vero 10 is the smallest form factor in the Vero family of next generation solid state light sources. In addition to delivering the performance and light quality required for many lighting applications, Vero incorporates several

features to simplify the design integration and manufacturing process, accelerate time to market and reduce system costs. Please visit [www.bridgelux.com](http://www.bridgelux.com) for more information on the Vero Series family of products.

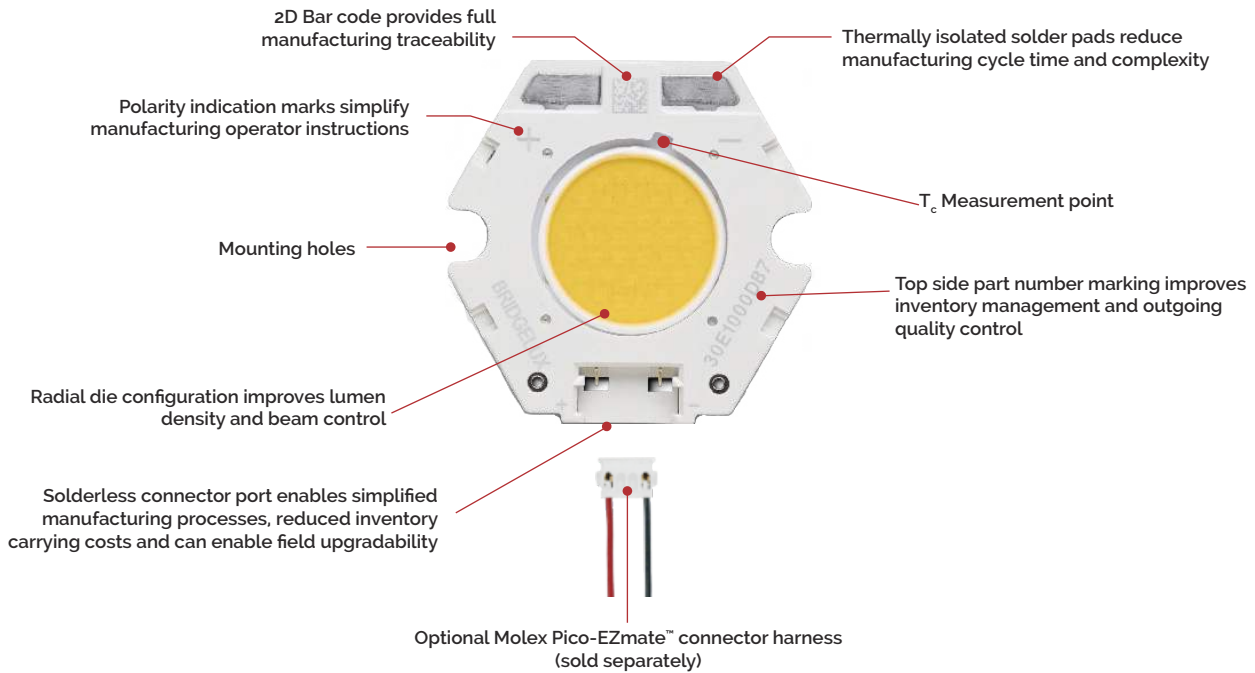

## Product Nomenclature

The part number designation for Bridgelux Vero LED arrays is explained as follows:

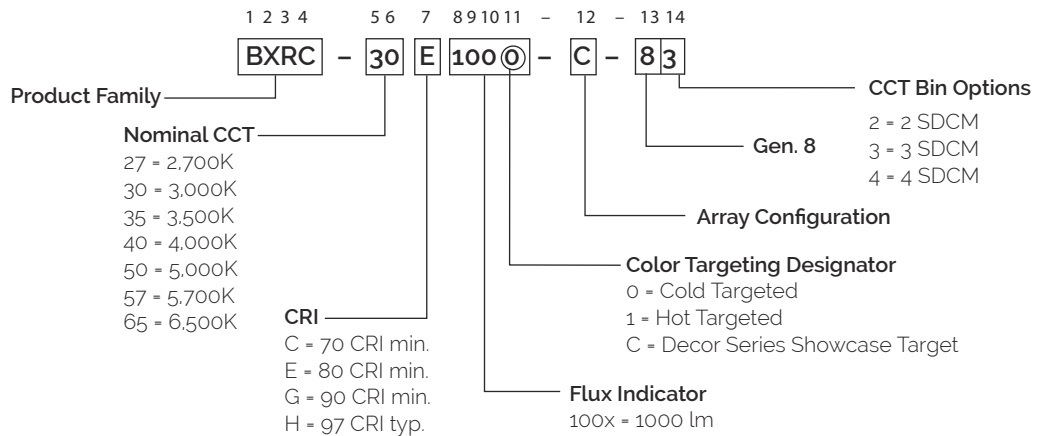

# Product Selection Guide

The following product configurations are available:

**Table 1:** Selection Guide, Pulsed Measurement Data ( $T_j = T_c = 25^\circ\text{C}$ )

| Part Number       | Nominal CCT <sup>1</sup> (K) | CRI <sup>2</sup> | Nominal Drive Current <sup>3</sup> (mA) | Typical Pulsed Flux <sup>4,5,6</sup> $T_c = 25^\circ\text{C}$ (lm) | Minimum Pulsed Flux <sup>6,7</sup> $T_c = 25^\circ\text{C}$ (lm) | Typical $V_f$ (V) | Typical Power (W) | Typical Efficacy (lm/W) |
|-------------------|------------------------------|------------------|---|--|--|-------------------|-------------------|-------------------------|
| BXRC-27E1000-B-8x | 2700                         | 80               | 200                                     | 1145   | 1008   | 34.2              | 6.8               | 167                     |
| BXRC-27E1000-C-8x | 2700                         | 80               | 300                                     | 1544   | 1359   | 30.7              | 9.2               | 168                     |
| BXRC-27E1000-D-8x | 2700                         | 80               | 250                                     | 1043   | 918  | 24.9              | 6.2               | 168                     |
| BXRC-27G1000-B-8x | 2700                         | 90               | 200                                     | 945  | 832  | 34.2              | 6.8               | 138                     |
| BXRC-27G1000-C-8x | 2700                         | 90               | 300                                     | 1274   | 1121   | 30.7              | 9.2               | 138                     |
| BXRC-27G1000-D-8x | 2700                         | 90               | 250                                     | 860  | 757  | 24.9              | 6.2               | 138                     |
| BXRC-27G10H0-B-8x | 2700                         | 90               | 200                                     | 986  | 867  | 34.2              | 6.8               | 144                     |
| BXRC-27G10H0-C-8x | 2700                         | 90               | 300                                     | 1329   | 1170   | 30.7              | 9.2               | 144                     |
| BXRC-27G10H0-D-8x | 2700                         | 90               | 250                                     | 897  | 790  | 24.9              | 6.2               | 144                     |
| BXRC-27H1000-B-8x | 2700                         | 97               | 200                                     | 838  | 737  | 34.2              | 6.8               | 122                     |
| BXRC-27H1000-C-8x | 2700                         | 97               | 300                                     | 1129   | 994  | 30.7              | 9.2               | 123                     |
| BXRC-27H1000-D-8x | 2700                         | 97               | 250                                     | 763  | 671  | 24.9              | 6.2               | 123                     |
| BXRC-30C1001-B-8x | 3000                         | 70               | 200                                     | 1274   | 1121   | 34.2              | 6.8               | 186                     |
| BXRC-30C1001-C-8x | 3000                         | 70               | 300                                     | 1718   | 1512   | 30.7              | 9.2               | 187                     |
| BXRC-30C1001-D-8x | 3000                         | 70               | 250                                     | 1160   | 1021   | 24.9              | 6.2               | 186                     |
| BXRC-30E1000-B-8x | 3000                         | 80               | 200                                     | 1217   | 1071   | 34.2              | 6.8               | 178                     |
| BXRC-30E1000-C-8x | 3000                         | 80               | 300                                     | 1641   | 1444   | 30.7              | 9.2               | 178                     |
| BXRC-30E1000-D-8x | 3000                         | 80               | 250                                     | 1108   | 975  | 24.9              | 6.2               | 178                     |
| BXRC-30G1000-B-8x | 3000                         | 90               | 200                                     | 988  | 869  | 34.2              | 6.8               | 144                     |
| BXRC-30G1000-C-8x | 3000                         | 90               | 300                                     | 1332   | 1172   | 30.7              | 9.2               | 145                     |
| BXRC-30G1000-D-8x | 3000                         | 90               | 250                                     | 899  | 792  | 24.9              | 6.2               | 144                     |
| BXRC-30G10H0-B-8x | 3000                         | 90               | 200                                     | 1034   | 910  | 34.2              | 6.8               | 151                     |
| BXRC-30G10H0-C-8x | 3000                         | 90               | 300                                     | 1395   | 1227   | 30.7              | 9.2               | 151                     |
| BXRC-30G10H0-D-8x | 3000                         | 90               | 250                                     | 942  | 829  | 24.9              | 6.2               | 151                     |
| BXRC-30H1000-B-8x | 3000                         | 97               | 200                                     | 895  | 787  | 34.2              | 6.8               | 131                     |
| BXRC-30H1000-C-8x | 3000                         | 97               | 300                                     | 1207   | 1062   | 30.7              | 9.2               | 131                     |
| BXRC-30H1000-D-8x | 3000                         | 97               | 250                                     | 815  | 717  | 24.9              | 6.2               | 131                     |
| BXRC-35E1000-B-8x | 3500                         | 80               | 200                                     | 1246   | 1096   | 34.2              | 6.8               | 182                     |
| BXRC-35E1000-C-8x | 3500                         | 80               | 300                                     | 1680   | 1478   | 30.7              | 9.2               | 182                     |
| BXRC-35E1000-D-8x | 3500                         | 80               | 250                                     | 1134   | 998  | 24.9              | 6.2               | 182                     |
| BXRC-35G1000-B-8x | 3500                         | 90               | 200                                     | 1024   | 901  | 34.2              | 6.8               | 150                     |
| BXRC-35G1000-C-8x | 3500                         | 90               | 300                                     | 1380   | 1215   | 30.7              | 9.2               | 150                     |
| BXRC-35G1000-D-8x | 3500                         | 90               | 250                                     | 932  | 820  | 24.9              | 6.2               | 150                     |

Notes for Table 1:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where  $T_j$  (junction temperature) =  $T_c$  (case temperature) =  $25^\circ\text{C}$ .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
- Minimum flux values at the nominal test current are guaranteed by 100% test.

# Product Selection Guide

**Table 1:** Selection Guide, Pulsed Measurement Data ( $T_j = T_c = 25^\circ\text{C}$ ) (continued)

| Part Number       | Nominal CCT <sup>1</sup> (K) | CRI <sup>2</sup> | Nominal Drive Current <sup>3</sup> (mA) | Typical Pulsed Flux <sup>4,5,6</sup> $T_c = 25^\circ\text{C}$ (lm) | Minimum Pulsed Flux <sup>6,7</sup> $T_c = 25^\circ\text{C}$ (lm) | Typical $V_f$ (V) | Typical Power (W) | Typical Efficacy (lm/W) |
|-------------------|------------------------------|------------------|---|--|--|-------------------|-------------------|-------------------------|
| BXRC-40C1001-B-8x | 4000                         | 70               | 200                                     | 1310   | 1153   | 34.2              | 6.8               | 192                     |
| BXRC-40C1001-C-8x | 4000                         | 70               | 300                                     | 1766   | 1555   | 30.7              | 9.2               | 192                     |
| BXRC-40C1001-D-8x | 4000                         | 70               | 250                                     | 1193   | 1050   | 24.9              | 6.2               | 192                     |
| BXRC-40E1000-B-8x | 4000                         | 80               | 200                                     | 1253   | 1102   | 34.2              | 6.8               | 183                     |
| BXRC-40E1000-C-8x | 4000                         | 80               | 300                                     | 1689   | 1487   | 30.7              | 9.2               | 183                     |
| BXRC-40E1000-D-8x | 4000                         | 80               | 250                                     | 1141   | 1004   | 24.9              | 6.2               | 183                     |
| BXRC-40G1000-B-8x | 4000                         | 90               | 200                                     | 1045   | 920  | 34.2              | 6.8               | 153                     |
| BXRC-40G1000-C-8x | 4000                         | 90               | 300                                     | 1409   | 1240   | 30.7              | 9.2               | 153                     |
| BXRC-40G1000-D-8x | 4000                         | 90               | 250                                     | 952  | 837  | 24.9              | 6.2               | 153                     |
| BXRC-50C1001-B-8x | 5000                         | 70               | 200                                     | 1317   | 1159   | 34.2              | 6.8               | 193                     |
| BXRC-50C1001-C-8x | 5000                         | 70               | 300                                     | 1776   | 1563   | 30.7              | 9.2               | 193                     |
| BXRC-50C1001-D-8x | 5000                         | 70               | 250                                     | 1199   | 1055   | 24.9              | 6.2               | 193                     |
| BXRC-50E1001-B-8x | 5000                         | 80               | 200                                     | 1267   | 1115   | 34.2              | 6.8               | 185                     |
| BXRC-50E1001-C-8x | 5000                         | 80               | 300                                     | 1709   | 1504   | 30.7              | 9.2               | 186                     |
| BXRC-50E1001-D-8x | 5000                         | 80               | 250                                     | 1154   | 1015   | 24.9              | 6.2               | 185                     |
| BXRC-50G1001-B-8x | 5000                         | 90               | 200                                     | 1095   | 964  | 34.2              | 6.8               | 160                     |
| BXRC-50G1001-C-8x | 5000                         | 90               | 300                                     | 1477   | 1300   | 30.7              | 9.2               | 160                     |
| BXRC-50G1001-D-8x | 5000                         | 90               | 250                                     | 997  | 878  | 24.9              | 6.2               | 160                     |
| BXRC-57C1001-B-8x | 5700                         | 70               | 200                                     | 1281   | 1128   | 34.2              | 6.8               | 187                     |
| BXRC-57C1001-C-8x | 5700                         | 70               | 300                                     | 1728   | 1521   | 30.7              | 9.2               | 188                     |
| BXRC-57C1001-D-8x | 5700                         | 70               | 250                                     | 1167   | 1027   | 24.9              | 6.2               | 187                     |
| BXRC-57E1001-B-8x | 5700                         | 80               | 200                                     | 1217   | 1071   | 34.2              | 6.8               | 178                     |
| BXRC-57E1001-C-8x | 5700                         | 80               | 300                                     | 1641   | 1444   | 30.7              | 9.2               | 178                     |
| BXRC-57E1001-D-8x | 5700                         | 80               | 250                                     | 1108   | 975  | 24.9              | 6.2               | 178                     |
| BXRC-65C1001-B-8x | 6500                         | 70               | 200                                     | 1281   | 1128   | 34.2              | 6.8               | 187                     |
| BXRC-65C1001-C-8x | 6500                         | 70               | 300                                     | 1728   | 1521   | 30.7              | 9.2               | 188                     |
| BXRC-65C1001-D-8x | 6500                         | 70               | 250                                     | 1167   | 1027   | 24.9              | 6.2               | 187                     |
| BXRC-65E1001-B-8x | 6500                         | 80               | 200                                     | 1231   | 1084   | 34.2              | 6.8               | 180                     |
| BXRC-65E1001-C-8x | 6500                         | 80               | 300                                     | 1660   | 1461   | 30.7              | 9.2               | 180                     |
| BXRC-65E1001-D-8x | 6500                         | 80               | 250                                     | 1121   | 987  | 24.9              | 6.2               | 180                     |

Notes for Table 1:

1. Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
2. CRI values are minimums for all products. Minimum R9 value for 80 CRI products is 0, the minimum R9 value for 90 CRI products is 50, the minimum R9 value for 97 CRI products is 93. Bridgelux maintains a  $\pm 3$  tolerance on CRI and R9 values.
3. Drive current is referred to as nominal drive current.
4. Products tested under pulsed condition (10ms pulse width) at nominal drive current where  $T_j$  (junction temperature) =  $T_c$  (case temperature) =  $25^\circ\text{C}$ .
5. Typical performance values are provided as a reference only and are not a guarantee of performance.
6. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
7. Minimum flux values at the nominal test current are guaranteed by 100% test.

# Product Selection Guide

**Table 2:** Selection Guide, Stabilized DC Performance ( $T_c = 85^\circ\text{C}$ )<sup>4,5</sup>

| Part Number       | Nominal CCT <sup>1</sup> (K) | CRI <sup>2</sup> | Nominal Drive Current <sup>3</sup> (mA) | Typical DC Flux <sup>4,5</sup> $T_c = 85^\circ\text{C}$ (lm) | Minimum DC Flux <sup>6</sup> $T_c = 85^\circ\text{C}$ (lm) | Typical $V_f$ (V) | Typical Power (W) | Typical Efficacy (lm/W) |
|-------------------|------------------------------|------------------|---|--|--|-------------------|-------------------|-------------------------|
| BXRC-27E1000-B-8x | 2700                         | 80               | 200                                     | 1031   | 907  | 33.6              | 6.7               | 154                     |
| BXRC-27E1000-C-8x | 2700                         | 80               | 300                                     | 1390   | 1223   | 30.1              | 9.0               | 154                     |
| BXRC-27E1000-D-8x | 2700                         | 80               | 250                                     | 939  | 826  | 24.4              | 6.1               | 154                     |
| BXRC-27G1000-B-8x | 2700                         | 90               | 200                                     | 850  | 748  | 33.6              | 6.7               | 127                     |
| BXRC-27G1000-C-8x | 2700                         | 90               | 300                                     | 1147   | 1009   | 30.1              | 9.0               | 127                     |
| BXRC-27G1000-D-8x | 2700                         | 90               | 250                                     | 774  | 681  | 24.4              | 6.1               | 127                     |
| BXRC-27G10H0-B-8x | 2700                         | 90               | 200                                     | 887  | 781  | 33.6              | 6.7               | 132                     |
| BXRC-27G10H0-C-8x | 2700                         | 90               | 300                                     | 1196   | 1053   | 30.1              | 9.0               | 132                     |
| BXRC-27G10H0-D-8x | 2700                         | 90               | 250                                     | 808  | 711  | 24.4              | 6.1               | 132                     |
| BXRC-27H1000-B-8x | 2700                         | 97               | 200                                     | 754  | 663  | 33.6              | 6.7               | 112                     |
| BXRC-27H1000-C-8x | 2700                         | 97               | 300                                     | 1016   | 894  | 30.1              | 9.0               | 112                     |
| BXRC-27H1000-D-8x | 2700                         | 97               | 250                                     | 686  | 604  | 24.4              | 6.1               | 112                     |
| BXRC-30C1001-B-8x | 3000                         | 70               | 200                                     | 1147   | 1009   | 33.6              | 6.7               | 171                     |
| BXRC-30C1001-C-8x | 3000                         | 70               | 300                                     | 1546   | 1361   | 30.1              | 9.0               | 171                     |
| BXRC-30C1001-D-8x | 3000                         | 70               | 250                                     | 1044   | 919  | 24.4              | 6.1               | 171                     |
| BXRC-30E1000-B-8x | 3000                         | 80               | 200                                     | 1095   | 964  | 33.6              | 6.7               | 163                     |
| BXRC-30E1000-C-8x | 3000                         | 80               | 300                                     | 1477   | 1300   | 30.1              | 9.0               | 163                     |
| BXRC-30E1000-D-8x | 3000                         | 80               | 250                                     | 997  | 878  | 24.4              | 6.1               | 163                     |
| BXRC-30G1000-B-8x | 3000                         | 90               | 200                                     | 889  | 782  | 33.6              | 6.7               | 133                     |
| BXRC-30G1000-C-8x | 3000                         | 90               | 300                                     | 1199   | 1055   | 30.1              | 9.0               | 133                     |
| BXRC-30G1000-D-8x | 3000                         | 90               | 250                                     | 809  | 712  | 24.4              | 6.1               | 133                     |
| BXRC-30G10H0-B-8x | 3000                         | 90               | 200                                     | 931  | 819  | 33.6              | 6.7               | 139                     |
| BXRC-30G10H0-C-8x | 3000                         | 90               | 300                                     | 1255   | 1105   | 30.1              | 9.0               | 139                     |
| BXRC-30G10H0-D-8x | 3000                         | 90               | 250                                     | 848  | 746  | 24.4              | 6.1               | 139                     |
| BXRC-30H1000-B-8x | 3000                         | 97               | 200                                     | 805  | 709  | 33.6              | 6.7               | 120                     |
| BXRC-30H1000-C-8x | 3000                         | 97               | 300                                     | 1086   | 956  | 30.1              | 9.0               | 120                     |
| BXRC-30H1000-D-8x | 3000                         | 97               | 250                                     | 733  | 645  | 24.4              | 6.1               | 120                     |
| BXRC-35E1000-B-8x | 3500                         | 80               | 200                                     | 1121   | 987  | 33.6              | 6.7               | 167                     |
| BXRC-35E1000-C-8x | 3500                         | 80               | 300                                     | 1512   | 1330   | 30.1              | 9.0               | 167                     |
| BXRC-35E1000-D-8x | 3500                         | 80               | 250                                     | 1021   | 898  | 24.4              | 6.1               | 167                     |
| BXRC-35G1000-B-8x | 3500                         | 90               | 200                                     | 921  | 811  | 33.6              | 6.7               | 137                     |
| BXRC-35G1000-C-8x | 3500                         | 90               | 300                                     | 1242   | 1093   | 30.1              | 9.0               | 137                     |
| BXRC-35G1000-D-8x | 3500                         | 90               | 250                                     | 839  | 738  | 24.4              | 6.1               | 137                     |

Notes for Table 2:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $85^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

# Product Selection Guide

**Table 2:** Selection Guide, Stabilized DC Performance ( $T_c = 85^\circ\text{C}$ )<sup>4,5</sup> (continued)

| Part Number       | Nominal CCT <sup>1</sup> (K) | CRI <sup>2</sup> | Nominal Drive Current <sup>3</sup> (mA) | Typical DC Flux <sup>4,5</sup> $T_c = 85^\circ\text{C}$ (lm) | Minimum DC Flux <sup>6</sup> $T_c = 85^\circ\text{C}$ (lm) | Typical $V_f$ (V) | Typical Power (W) | Typical Efficacy (lm/W) |
|-------------------|------------------------------|------------------|---|--|--|-------------------|-------------------|-------------------------|
| BXRC-40C1001-B-8x | 4000                         | 70               | 200                                     | 1179   | 1038   | 33.6              | 6.7               | 176                     |
| BXRC-40C1001-C-8x | 4000                         | 70               | 300                                     | 1590   | 1399   | 30.1              | 9.0               | 176                     |
| BXRC-40C1001-D-8x | 4000                         | 70               | 250                                     | 1073   | 945  | 24.4              | 6.1               | 176                     |
| BXRC-40E1000-B-8x | 4000                         | 80               | 200                                     | 1128   | 992  | 33.6              | 6.7               | 168                     |
| BXRC-40E1000-C-8x | 4000                         | 80               | 300                                     | 1520   | 1338   | 30.1              | 9.0               | 168                     |
| BXRC-40E1000-D-8x | 4000                         | 80               | 250                                     | 1027   | 903  | 24.4              | 6.1               | 168                     |
| BXRC-40G1000-B-8x | 4000                         | 90               | 200                                     | 941  | 828  | 33.6              | 6.7               | 140                     |
| BXRC-40G1000-C-8x | 4000                         | 90               | 300                                     | 1268   | 1116   | 30.1              | 9.0               | 140                     |
| BXRC-40G1000-D-8x | 4000                         | 90               | 250                                     | 856  | 754  | 24.4              | 6.1               | 140                     |
| BXRC-50C1001-B-8x | 5000                         | 70               | 200                                     | 1186   | 1043   | 33.6              | 6.7               | 177                     |
| BXRC-50C1001-C-8x | 5000                         | 70               | 300                                     | 1599   | 1407   | 30.1              | 9.0               | 177                     |
| BXRC-50C1001-D-8x | 5000                         | 70               | 250                                     | 1079   | 950  | 24.4              | 6.1               | 177                     |
| BXRC-50E1001-B-8x | 5000                         | 80               | 200                                     | 1140   | 1004   | 33.6              | 6.7               | 170                     |
| BXRC-50E1001-C-8x | 5000                         | 80               | 300                                     | 1538   | 1353   | 30.1              | 9.0               | 170                     |
| BXRC-50E1001-D-8x | 5000                         | 80               | 250                                     | 1038   | 914  | 24.4              | 6.1               | 170                     |
| BXRC-50G1001-B-8x | 5000                         | 90               | 200                                     | 986  | 867  | 33.6              | 6.7               | 147                     |
| BXRC-50G1001-C-8x | 5000                         | 90               | 300                                     | 1329   | 1170   | 30.1              | 9.0               | 147                     |
| BXRC-50G1001-D-8x | 5000                         | 90               | 250                                     | 897  | 790  | 24.4              | 6.1               | 147                     |
| BXRC-57C1001-B-8x | 5700                         | 70               | 200                                     | 1153   | 1015   | 33.6              | 6.7               | 172                     |
| BXRC-57C1001-C-8x | 5700                         | 70               | 300                                     | 1555   | 1368   | 30.1              | 9.0               | 172                     |
| BXRC-57C1001-D-8x | 5700                         | 70               | 250                                     | 1050   | 924  | 24.4              | 6.1               | 172                     |
| BXRC-57E1001-B-8x | 5700                         | 80               | 200                                     | 1095   | 964  | 33.6              | 6.7               | 163                     |
| BXRC-57E1001-C-8x | 5700                         | 80               | 300                                     | 1477   | 1300   | 30.1              | 9.0               | 163                     |
| BXRC-57E1001-D-8x | 5700                         | 80               | 250                                     | 997  | 878  | 24.4              | 6.1               | 163                     |
| BXRC-65C1001-B-8x | 6500                         | 70               | 200                                     | 1153   | 1015   | 33.6              | 6.7               | 172                     |
| BXRC-65C1001-C-8x | 6500                         | 70               | 300                                     | 1555   | 1368   | 30.1              | 9.0               | 172                     |
| BXRC-65C1001-D-8x | 6500                         | 70               | 250                                     | 1050   | 924  | 24.4              | 6.1               | 172                     |
| BXRC-65E1001-B-8x | 6500                         | 80               | 200                                     | 1108   | 975  | 33.6              | 6.7               | 165                     |
| BXRC-65E1001-C-8x | 6500                         | 80               | 300                                     | 1494   | 1315   | 30.1              | 9.0               | 165                     |
| BXRC-65E1001-D-8x | 6500                         | 80               | 250                                     | 1009   | 888  | 24.4              | 6.1               | 165                     |

Notes for Table 2:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50. Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $85^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.



# European Product Registry for Energy Labeling

The European Product Registry for Energy Labeling (EPREL) is defined in the EU Regulation 2017/1369 to provide important energy efficiency information to consumers. Together with Energy Labeling Regulation ELR (EU) 2019/2015 which was amended by regulation (EU) 2021/340 for energy labelling of light sources, manufacturers are required to declare an energy class based on key technical specifications from each of their product and register it in an open data base managed by EPREL. It is now a legal requirement for a vendor of light sources to upload information about their products into the EPREL database before placing these products on the market in the EU.

Table 3 below provides a list of part numbers that are in compliance with ELR and are currently listed in the EPREL database.

At Bridgelux, we are fully committed to supplying products that are compliant with pertinent laws, rules, and obligation imposed by relevant government bodies including the European Energy Labeling regulation. Customers can use these products with full confidence for any projects that fall under the ELR.

**Table 3:** Part numbers registered in European Product Registry for Energy Labeling

| PART NUMBER <sup>1</sup> | CCT (K) | CRI | Current <sup>2</sup> (mA) | Vf (V) | Useful flux <sup>3</sup> ( $\Phi_{use}$ ) at 85C (lm) | Power (W) | Efficacy (lm/W) | Energy efficiency class <sup>4</sup> | Registration No | URL to Product Information Sheet in EPREL Database                                    |
|--------------------------|---------|-----|---------------------------|--------|---|-----------|-----------------|--------------------------------------|-----------------|---|
| BXRC-27E1000-B-8x        | 2700    | 80  | 500                       | 36.8   | 2323  | 18.4      | 126.4           | E                                    | 871002          | <a href="https://eprelec.europa.eu/qr/871002">https://eprelec.europa.eu/qr/871002</a> |
| BXRC-27E1000-C-8x        | 2700    | 80  | 1000                      | 34.3   | 4115  | 34.3      | 119.9           | E                                    | 871007          | <a href="https://eprelec.europa.eu/qr/871007">https://eprelec.europa.eu/qr/871007</a> |
| BXRC-27E1000-D-8x        | 2700    | 80  | 1000                      | 28.5   | 3294  | 28.5      | 115.4           | F                                    | 871012          | <a href="https://eprelec.europa.eu/qr/871012">https://eprelec.europa.eu/qr/871012</a> |
| BXRC-27G1000-B-8x        | 2700    | 90  | 500                       | 36.8   | 1917  | 18.4      | 104.2           | F                                    | 871071          | <a href="https://eprelec.europa.eu/qr/871071">https://eprelec.europa.eu/qr/871071</a> |
| BXRC-27G1000-C-8x        | 2700    | 90  | 770                       | 33.1   | 2727  | 25.5      | 106.9           | F                                    | 871076          | <a href="https://eprelec.europa.eu/qr/871076">https://eprelec.europa.eu/qr/871076</a> |
| BXRC-27G1000-D-8x        | 2700    | 90  | 720                       | 27.3   | 2058  | 19.7      | 104.6           | F                                    | 871081          | <a href="https://eprelec.europa.eu/qr/871081">https://eprelec.europa.eu/qr/871081</a> |
| BXRC-27G10Ho-B-8x        | 2700    | 90  | 500                       | 36.8   | 1999  | 18.4      | 108.7           | F                                    | 871085          | <a href="https://eprelec.europa.eu/qr/871085">https://eprelec.europa.eu/qr/871085</a> |
| BXRC-27G10Ho-C-8x        | 2700    | 90  | 870                       | 33.7   | 3157  | 29.3      | 107.8           | F                                    | 871089          | <a href="https://eprelec.europa.eu/qr/871089">https://eprelec.europa.eu/qr/871089</a> |
| BXRC-27G10Ho-D-8x        | 2700    | 90  | 810                       | 27.7   | 2379  | 22.5      | 105.9           | F                                    | 871093          | <a href="https://eprelec.europa.eu/qr/871093">https://eprelec.europa.eu/qr/871093</a> |
| BXRC-30C1001-B-8x        | 3000    | 70  | 500                       | 36.8   | 2585  | 18.4      | 140.6           | E                                    | 871258          | <a href="https://eprelec.europa.eu/qr/871258">https://eprelec.europa.eu/qr/871258</a> |
| BXRC-30C1001-C-8x        | 3000    | 70  | 1000                      | 34.3   | 4578  | 34.3      | 133.4           | E                                    | 871264          | <a href="https://eprelec.europa.eu/qr/871264">https://eprelec.europa.eu/qr/871264</a> |
| BXRC-30C1001-D-8x        | 3000    | 70  | 1000                      | 28.5   | 3664  | 28.5      | 128.4           | E                                    | 871270          | <a href="https://eprelec.europa.eu/qr/871270">https://eprelec.europa.eu/qr/871270</a> |
| BXRC-30E1000-B-8x        | 3000    | 80  | 500                       | 36.8   | 2468  | 18.4      | 134.2           | E                                    | 871332          | <a href="https://eprelec.europa.eu/qr/871332">https://eprelec.europa.eu/qr/871332</a> |
| BXRC-30E1000-C-8x        | 3000    | 80  | 1000                      | 34.3   | 4373  | 34.3      | 127.4           | E                                    | 871337          | <a href="https://eprelec.europa.eu/qr/871337">https://eprelec.europa.eu/qr/871337</a> |
| BXRC-30E1000-D-8x        | 3000    | 80  | 1000                      | 28.5   | 3500  | 28.5      | 122.6           | E                                    | 871342          | <a href="https://eprelec.europa.eu/qr/871342">https://eprelec.europa.eu/qr/871342</a> |
| BXRC-30G1000-B-8x        | 3000    | 90  | 500                       | 36.8   | 2004  | 18.4      | 109.0           | F                                    | 871401          | <a href="https://eprelec.europa.eu/qr/871401">https://eprelec.europa.eu/qr/871401</a> |
| BXRC-30G1000-C-8x        | 3000    | 90  | 880                       | 33.7   | 3195  | 29.7      | 107.7           | F                                    | 871406          | <a href="https://eprelec.europa.eu/qr/871406">https://eprelec.europa.eu/qr/871406</a> |
| BXRC-30G1000-D-8x        | 3000    | 90  | 820                       | 27.8   | 2409  | 22.8      | 105.8           | F                                    | 871411          | <a href="https://eprelec.europa.eu/qr/871411">https://eprelec.europa.eu/qr/871411</a> |

Notes for Table 3:

1. All device listed here must be disposed as e-waste upon its end of life according to local country guideline in each country.
2. For information on performance values at alternative drive conditions, please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
3. For a definition of useful luminous flux ( $\Phi_{use}$ ), please see the ELR regulations at <https://tinyurl.com/4b6zvt4m>.
4. EPREL requires an arrow symbol containing the letter of the energy efficiency class to be displayed, on technical promotional material. Refer to this energy efficiency class column for specific energy efficiency class on each part number.

# European Product Registry for Energy Labeling

**Table 3:** Part numbers registered in European Product Registry for Energy Labeling (Continued)


| PART NUMBER <sup>1</sup> | CCT (K) | CRI | Current <sup>2</sup> (mA) | Vf (V) | Useful flux <sup>3</sup> ( $\Phi_{use}$ ) at 85C (lm) | Power (W) | Efficacy (lm/W) | Energy efficiency class <sup>4</sup> | Registration No | URL to Product Information Sheet in EPREL Database                                    |
|--------------------------|---------|-----|---------------------------|--------|---|-----------|-----------------|--------------------------------------|-----------------|---|
| BXRC-30G10H0-B-8x        | 3000    | 90  | 500                       | 36.8   | 2098  | 18.4      | 114.1           | F                                    | 871423          | <a href="https://eprelec.europa.eu/qr/871423">https://eprelec.europa.eu/qr/871423</a> |
| BXRC-30G10H0-C-8x        | 3000    | 90  | 1000                      | 34.3   | 3717  | 34.3      | 108.3           | F                                    | 871427          | <a href="https://eprelec.europa.eu/qr/871427">https://eprelec.europa.eu/qr/871427</a> |
| BXRC-30G10H0-D-8x        | 3000    | 90  | 920                       | 28.2   | 2777  | 25.9      | 107.1           | F                                    | 871431          | <a href="https://eprelec.europa.eu/qr/871431">https://eprelec.europa.eu/qr/871431</a> |
| BXRC-35E1000-B-8x        | 3500    | 80  | 500                       | 36.8   | 2526  | 18.4      | 137.4           | E                                    | 871606          | <a href="https://eprelec.europa.eu/qr/871606">https://eprelec.europa.eu/qr/871606</a> |
| BXRC-35E1000-C-8x        | 3500    | 80  | 1000                      | 34.3   | 4475  | 34.3      | 130.4           | E                                    | 871611          | <a href="https://eprelec.europa.eu/qr/871611">https://eprelec.europa.eu/qr/871611</a> |
| BXRC-35E1000-D-8x        | 3500    | 80  | 1000                      | 28.5   | 3582  | 28.5      | 125.5           | E                                    | 871616          | <a href="https://eprelec.europa.eu/qr/871616">https://eprelec.europa.eu/qr/871616</a> |
| BXRC-35G1000-B-8x        | 3500    | 90  | 500                       | 36.8   | 2076  | 18.4      | 112.9           | F                                    | 871674          | <a href="https://eprelec.europa.eu/qr/871674">https://eprelec.europa.eu/qr/871674</a> |
| BXRC-35G1000-C-8x        | 3500    | 90  | 960                       | 34.1   | 3555  | 32.8      | 108.5           | F                                    | 871679          | <a href="https://eprelec.europa.eu/qr/871679">https://eprelec.europa.eu/qr/871679</a> |
| BXRC-35G1000-D-8x        | 3500    | 90  | 900                       | 28.1   | 2699  | 25.3      | 106.7           | F                                    | 871684          | <a href="https://eprelec.europa.eu/qr/871684">https://eprelec.europa.eu/qr/871684</a> |
| BXRC-40C1001-B-8x        | 4000    | 70  | 500                       | 36.8   | 2657  | 18.4      | 144.5           | E                                    | 871760          | <a href="https://eprelec.europa.eu/qr/871760">https://eprelec.europa.eu/qr/871760</a> |
| BXRC-40C1001-C-8x        | 4000    | 70  | 1000                      | 34.3   | 4707  | 34.3      | 137.1           | E                                    | 871766          | <a href="https://eprelec.europa.eu/qr/871766">https://eprelec.europa.eu/qr/871766</a> |
| BXRC-40C1001-D-8x        | 4000    | 70  | 1000                      | 28.5   | 3767  | 28.5      | 132.0           | E                                    | 871772          | <a href="https://eprelec.europa.eu/qr/871772">https://eprelec.europa.eu/qr/871772</a> |
| BXRC-40E1000-B-8x        | 4000    | 80  | 500                       | 36.8   | 2541  | 18.4      | 138.2           | E                                    | 871838          | <a href="https://eprelec.europa.eu/qr/871838">https://eprelec.europa.eu/qr/871838</a> |
| BXRC-40E1000-C-8x        | 4000    | 80  | 1000                      | 34.3   | 4501  | 34.3      | 131.1           | E                                    | 871843          | <a href="https://eprelec.europa.eu/qr/871843">https://eprelec.europa.eu/qr/871843</a> |
| BXRC-40E1000-D-8x        | 4000    | 80  | 1000                      | 28.5   | 3603  | 28.5      | 126.2           | E                                    | 871848          | <a href="https://eprelec.europa.eu/qr/871848">https://eprelec.europa.eu/qr/871848</a> |
| BXRC-40G1000-B-8x        | 4000    | 90  | 500                       | 36.8   | 2120  | 18.4      | 115.3           | F                                    | 871907          | <a href="https://eprelec.europa.eu/qr/871907">https://eprelec.europa.eu/qr/871907</a> |
| BXRC-40G1000-C-8x        | 4000    | 90  | 1000                      | 34.3   | 3755  | 34.3      | 109.4           | F                                    | 871912          | <a href="https://eprelec.europa.eu/qr/871912">https://eprelec.europa.eu/qr/871912</a> |
| BXRC-40G1000-D-8x        | 4000    | 90  | 950                       | 28.3   | 2880  | 26.9      | 107.0           | F                                    | 871917          | <a href="https://eprelec.europa.eu/qr/871917">https://eprelec.europa.eu/qr/871917</a> |
| BXRC-50C1001-B-8x        | 5000    | 70  | 500                       | 36.8   | 2672  | 18.4      | 145.3           | E                                    | 871996          | <a href="https://eprelec.europa.eu/qr/871996">https://eprelec.europa.eu/qr/871996</a> |
| BXRC-50C1001-C-8x        | 5000    | 70  | 1000                      | 34.3   | 4733  | 34.3      | 137.9           | E                                    | 872000          | <a href="https://eprelec.europa.eu/qr/872000">https://eprelec.europa.eu/qr/872000</a> |
| BXRC-50C1001-D-8x        | 5000    | 70  | 1000                      | 28.5   | 3788  | 28.5      | 132.7           | E                                    | 872004          | <a href="https://eprelec.europa.eu/qr/872004">https://eprelec.europa.eu/qr/872004</a> |
| BXRC-50E1001-B-8x        | 5000    | 80  | 500                       | 36.8   | 2570  | 18.4      | 139.8           | E                                    | 872048          | <a href="https://eprelec.europa.eu/qr/872048">https://eprelec.europa.eu/qr/872048</a> |
| BXRC-50E1001-C-8x        | 5000    | 80  | 1000                      | 34.3   | 4553  | 34.3      | 132.6           | E                                    | 872052          | <a href="https://eprelec.europa.eu/qr/872052">https://eprelec.europa.eu/qr/872052</a> |
| BXRC-50E1001-D-8x        | 5000    | 80  | 1000                      | 28.5   | 3644  | 28.5      | 127.7           | E                                    | 872056          | <a href="https://eprelec.europa.eu/qr/872056">https://eprelec.europa.eu/qr/872056</a> |
| BXRC-50G1001-B-8x        | 5000    | 90  | 500                       | 36.8   | 2222  | 18.4      | 120.8           | E                                    | 872100          | <a href="https://eprelec.europa.eu/qr/872100">https://eprelec.europa.eu/qr/872100</a> |
| BXRC-50G1001-C-8x        | 5000    | 90  | 1000                      | 34.3   | 3935  | 34.3      | 114.7           | F                                    | 872104          | <a href="https://eprelec.europa.eu/qr/872104">https://eprelec.europa.eu/qr/872104</a> |
| BXRC-50G1001-D-8x        | 5000    | 90  | 1000                      | 28.5   | 3150  | 28.5      | 110.4           | F                                    | 872108          | <a href="https://eprelec.europa.eu/qr/872108">https://eprelec.europa.eu/qr/872108</a> |
| BXRC-57C1001-B-8x        | 5700    | 70  | 500                       | 36.8   | 2599  | 18.4      | 141.4           | E                                    | 872206          | <a href="https://eprelec.europa.eu/qr/872206">https://eprelec.europa.eu/qr/872206</a> |
| BXRC-57C1001-C-8x        | 5700    | 70  | 1000                      | 34.3   | 4604  | 34.3      | 134.1           | E                                    | 872210          | <a href="https://eprelec.europa.eu/qr/872210">https://eprelec.europa.eu/qr/872210</a> |
| BXRC-57C1001-D-8x        | 5700    | 70  | 1000                      | 28.5   | 3685  | 28.5      | 129.1           | E                                    | 872214          | <a href="https://eprelec.europa.eu/qr/872214">https://eprelec.europa.eu/qr/872214</a> |
| BXRC-57E1001-B-8x        | 5700    | 80  | 500                       | 36.8   | 2468  | 18.4      | 134.2           | E                                    | 872255          | <a href="https://eprelec.europa.eu/qr/872255">https://eprelec.europa.eu/qr/872255</a> |
| BXRC-57E1001-C-8x        | 5700    | 80  | 1000                      | 34.3   | 4373  | 34.3      | 127.4           | E                                    | 872259          | <a href="https://eprelec.europa.eu/qr/872259">https://eprelec.europa.eu/qr/872259</a> |
| BXRC-57E1001-D-8x        | 5700    | 80  | 1000                      | 28.5   | 3500  | 28.5      | 122.6           | E                                    | 872263          | <a href="https://eprelec.europa.eu/qr/872263">https://eprelec.europa.eu/qr/872263</a> |
| BXRC-65C1001-B-8x        | 6500    | 70  | 500                       | 36.8   | 2599  | 18.4      | 141.4           | E                                    | 872303          | <a href="https://eprelec.europa.eu/qr/872303">https://eprelec.europa.eu/qr/872303</a> |
| BXRC-65C1001-C-8x        | 6500    | 70  | 1000                      | 34.3   | 4604  | 34.3      | 134.1           | E                                    | 872307          | <a href="https://eprelec.europa.eu/qr/872307">https://eprelec.europa.eu/qr/872307</a> |
| BXRC-65C1001-D-8x        | 6500    | 70  | 1000                      | 28.5   | 3685  | 28.5      | 129.1           | E                                    | 872311          | <a href="https://eprelec.europa.eu/qr/872311">https://eprelec.europa.eu/qr/872311</a> |

Notes for Table 3:

1. All device listed here must be disposed as e-waste upon its end of life according to local country guideline in each country.
2. For information on performance values at alternative drive conditions, please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
3. For a definition of useful luminous flux ( $\Phi_{use}$ ), please see the ELR regulations at <https://tinyurl.com/4b6zvt4m>.
4. EPREL requires an arrow symbol containing the letter of the energy efficiency class to be displayed, on technical promotional material. Refer to this energy efficiency class column for specific energy efficiency class on each part number.

# European Product Registry for Energy Labeling

**Table 3:** Part numbers registered in European Product Registry for Energy Labeling (Continued)

| PART NUMBER <sup>1</sup> | CCT (K) | CRI | Current <sup>2</sup> (mA) | Vf (V) | Useful flux <sup>3</sup> ( $\Phi_{use}$ ) at 85°C (lm) | Power (W) | Efficacy (lm/W) | Energy efficiency class <sup>4</sup><br> | Registration No | URL to Product Information Sheet in EPREL Database                                    |
|--------------------------|---------|-----|---------------------------|--------|--|-----------|-----------------|--|-----------------|---|
| BXRC-65E1001-B-8x        | 6500    | 80  | 500                       | 36.8   | 2497   | 18.4      | 135.8           | E  | 872353          | <a href="https://epreLec.europa.eu/qr/872353">https://epreLec.europa.eu/qr/872353</a> |
| BXRC-65E1001-C-8x        | 6500    | 80  | 1000                      | 34.3   | 4424   | 34.3      | 128.9           | E  | 872357          | <a href="https://epreLec.europa.eu/qr/872357">https://epreLec.europa.eu/qr/872357</a> |
| BXRC-65E1001-D-8x        | 6500    | 80  | 1000                      | 28.5   | 3541   | 28.5      | 124.1           | E  | 872361          | <a href="https://epreLec.europa.eu/qr/872361">https://epreLec.europa.eu/qr/872361</a> |

Notes for Table 3:

1. All device listed here must be disposed as e-waste upon its end of life according to local country guideline in each country.
2. For information on performance values at alternative drive conditions, please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
3. For a definition of useful luminous flux ( $\Phi_{use}$ ), please see the ELR regulations at <https://tinyurl.com/4b6zvt4m>.
4. EPREL requires an arrow symbol containing the letter of the energy efficiency class to be displayed, on technical promotional material. Refer to this energy efficiency class column for specific energy efficiency class on each part number.

# Performance at Commonly Used Drive Currents

Vero LED arrays are tested to the specifications shown using the nominal drive currents in Table 1. Vero may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figures 1, 2 & 3 and the flux vs. current characteristics shown in Figures 4, 5 & 6. The performance at commonly used drive currents is summarized in Table 4.

**Table 4:** Product Performance at Commonly Used Drive Currents

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical V <sub>f</sub><br>T <sub>c</sub> = 25°C (V) | Typical Power<br>T <sub>c</sub> = 25°C (W) | Typical Flux <sup>2</sup><br>T <sub>c</sub> = 25°C (lm) | Typical DC Flux <sup>3</sup><br>T <sub>c</sub> = 85°C (lm) | Typical Efficacy<br>T <sub>c</sub> = 25°C (lm/W) |
|-------------------|-----|---------------------------------|---|--|---|--|--|
| BXRC-27E1000-B-8x | 80  | 100                             | 32.9  | 3.3  | 597   | 537  | 181  |
|                   |     | 150                             | 33.6  | 5.0  | 872   | 785  | 173  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>1145</b>   | <b>1031</b>  | <b>168</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1500  | 1350   | 159  |
|                   |     | 400                             | 36.5  | 14.6                                       | 2131  | 1918   | 146  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2581  | 2323   | 138  |
| BXRC-27E1000-C-8x | 80  | 150                             | 29.6  | 4.4  | 805   | 725  | 181  |
|                   |     | 225                             | 30.2  | 6.8  | 1176  | 1058   | 173  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1544</b>   | <b>1390</b>  | <b>168</b>                                       |
|                   |     | 360                             | 31.2  | 11.2                                       | 1817  | 1635   | 162  |
|                   |     | 600                             | 32.8  | 19.7                                       | 2874  | 2586   | 146  |
|                   |     | 1000                            | 35.0  | 35.0                                       | 4400  | 3960   | 126  |
| BXRC-27E1000-D-8x | 80  | 125                             | 24.0  | 3.0  | 544   | 489  | 181  |
|                   |     | 185                             | 24.4  | 4.5  | 784   | 706  | 174  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>1043</b>   | <b>939</b>   | <b>168</b>                                       |
|                   |     | 350                             | 25.6  | 9.0  | 1412  | 1271   | 158  |
|                   |     | 500                             | 26.6  | 13.3                                       | 1940  | 1746   | 146  |
|                   |     | 1000                            | 29.1  | 29.1                                       | 3412  | 3070   | 117  |
| BXRC-27G1000-B-8x | 90  | 100                             | 32.9  | 3.3  | 493   | 443  | 150  |
|                   |     | 150                             | 33.6  | 5.0  | 719   | 647  | 143  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>945</b>  | <b>850</b>   | <b>138</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1238  | 1114   | 131  |
|                   |     | 400                             | 36.5  | 14.6                                       | 1758  | 1582   | 120  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2129  | 1917   | 114  |
| BXRC-27G1000-C-8x | 90  | 150                             | 29.6  | 4.4  | 664   | 598  | 150  |
|                   |     | 225                             | 30.2  | 6.8  | 970   | 873  | 143  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1274</b>   | <b>1147</b>  | <b>138</b>                                       |
|                   |     | 360                             | 31.2  | 11.2                                       | 1499  | 1349   | 134  |
|                   |     | 600                             | 32.8  | 19.7                                       | 2371  | 2134   | 120  |
|                   |     | 1000                            | 35.0  | 35.0                                       | 3630  | 3267   | 104  |
| BXRC-27G1000-D-8x | 90  | 125                             | 24.0  | 3.0  | 448   | 404  | 150  |
|                   |     | 185                             | 24.4  | 4.5  | 647   | 582  | 143  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>860</b>  | <b>774</b>   | <b>138</b>                                       |
|                   |     | 350                             | 25.6  | 9.0  | 1165  | 1048   | 130  |
|                   |     | 500                             | 26.6  | 13.3                                       | 1601  | 1441   | 120  |
|                   |     | 1000                            | 29.1  | 29.1                                       | 2815  | 2533   | 97   |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical $V_f$<br>$T_c = 25^\circ\text{C}$ (V) | Typical Power<br>$T_c = 25^\circ\text{C}$ (W) | Typical Flux <sup>2</sup><br>$T_c = 25^\circ\text{C}$ (lm) | Typical DC Flux <sup>3</sup><br>$T_c = 85^\circ\text{C}$ (lm) | Typical Efficacy<br>$T_c = 25^\circ\text{C}$ (lm/W) |
|-------------------|-----|---------------------------------|---|---|--|---|---|
| BXRC-27G10H0-B-8x | 90  | 100                             | 32.9  | 3.3   | 514  | 462   | 156   |
|                   |     | 150                             | 33.6  | 5.0   | 750  | 675   | 149   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>986</b>   | <b>887</b>  | <b>144</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1291   | 1162  | 137   |
|                   |     | 400                             | 36.5  | 14.6  | 1834   | 1651  | 126   |
|                   |     | 500                             | 37.5  | 18.7  | 2221   | 1999  | 118   |
| BXRC-27G10H0-C-8x | 90  | 150                             | 29.6  | 4.4   | 693  | 624   | 156   |
|                   |     | 225                             | 30.2  | 6.8   | 1012   | 911   | 149   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1329</b>  | <b>1196</b>   | <b>144</b>  |
|                   |     | 360                             | 31.2  | 11.2  | 1564   | 1407  | 139   |
|                   |     | 600                             | 32.8  | 19.7  | 2473   | 2226  | 126   |
|                   |     | 1000                            | 35.0  | 35.0  | 3787   | 3408  | 108   |
| BXRC-27G10H0-D-8x | 90  | 125                             | 24.0  | 3.0   | 468  | 421   | 156   |
|                   |     | 185                             | 24.4  | 4.5   | 675  | 607   | 149   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>897</b>   | <b>808</b>  | <b>144</b>  |
|                   |     | 350                             | 25.6  | 9.0   | 1215   | 1093  | 136   |
|                   |     | 500                             | 26.6  | 13.3  | 1670   | 1503  | 126   |
|                   |     | 1000                            | 29.1  | 29.1  | 2936   | 2642  | 101   |
| BXRC-27H1000-B-8x | 97  | 100                             | 32.9  | 3.3   | 437  | 393   | 133   |
|                   |     | 150                             | 33.6  | 5.0   | 638  | 574   | 127   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>838</b>   | <b>754</b>  | <b>122</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1097   | 987   | 116   |
|                   |     | 400                             | 36.5  | 14.6  | 1558   | 1403  | 107   |
|                   |     | 500                             | 37.5  | 18.7  | 1887   | 1699  | 101   |
| BXRC-27H1000-C-8x | 97  | 150                             | 29.8  | 4.5   | 592  | 532   | 132   |
|                   |     | 225                             | 30.3  | 6.8   | 863  | 777   | 127   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1129</b>  | <b>1016</b>   | <b>122</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 1338   | 1204  | 120   |
|                   |     | 600                             | 32.4  | 19.4  | 2138   | 1924  | 110   |
|                   |     | 1000                            | 34.3  | 34.3  | 3343   | 3009  | 97  |
| BXRC-27H1000-D-8x | 97  | 125                             | 24.3  | 3.0   | 400  | 360   | 132   |
|                   |     | 185                             | 24.6  | 4.5   | 576  | 518   | 127   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>763</b>   | <b>686</b>  | <b>123</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1044   | 939   | 117   |
|                   |     | 500                             | 26.1  | 13.0  | 1450   | 1305  | 111   |
|                   |     | 1000                            | 28.1  | 28.1  | 2676   | 2409  | 95  |
| BXRC-30C1001-B-8x | 70  | 100                             | 32.9  | 3.3   | 664  | 598   | 202   |
|                   |     | 150                             | 33.6  | 5.0   | 970  | 873   | 193   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1274</b>  | <b>1147</b>   | <b>186</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1669   | 1502  | 176   |
|                   |     | 400                             | 36.5  | 14.6  | 2371   | 2134  | 162   |
|                   |     | 500                             | 37.5  | 18.7  | 2872   | 2584  | 153   |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical V <sub>f</sub><br>T <sub>c</sub> = 25°C (V) | Typical Power<br>T <sub>c</sub> = 25°C (W) | Typical Flux <sup>2</sup><br>T <sub>c</sub> = 25°C (lm) | Typical DC Flux <sup>3</sup><br>T <sub>c</sub> = 85°C (lm) | Typical Efficacy<br>T <sub>c</sub> = 25°C (lm/W) |
|-------------------|-----|---------------------------------|---|--|---|--|--|
| BXRC-30C1001-C-8x | 70  | 150                             | 29.8  | 4.5  | 900   | 810  | 201  |
|                   |     | 225                             | 30.3  | 6.8  | 1313  | 1182   | 193  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1718</b>   | <b>1546</b>  | <b>186</b>                                       |
|                   |     | 360                             | 31.1  | 11.2                                       | 2036  | 1832   | 182  |
|                   |     | 600                             | 32.4  | 19.4                                       | 3252  | 2927   | 167  |
|                   |     | 1000                            | 34.3  | 34.3                                       | 5086  | 4578   | 148  |
| BXRC-30C1001-D-8x | 70  | 125                             | 24.3  | 3.0  | 609   | 548  | 201  |
|                   |     | 185                             | 24.6  | 4.5  | 876   | 788  | 193  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>1160</b>   | <b>1044</b>  | <b>186</b>                                       |
|                   |     | 350                             | 25.4  | 8.9  | 1588  | 1429   | 179  |
|                   |     | 500                             | 26.1  | 13.0                                       | 2206  | 1986   | 169  |
|                   |     | 1000                            | 28.1  | 28.1                                       | 4072  | 3664   | 145  |
| BXRC-30E1000-B-8x | 80  | 100                             | 32.9  | 3.3  | 634   | 571  | 193  |
|                   |     | 150                             | 33.6  | 5.0  | 926   | 834  | 184  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>1217</b>   | <b>1095</b>  | <b>178</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1594  | 1435   | 169  |
|                   |     | 400                             | 36.5  | 14.6                                       | 2264  | 2038   | 155  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2742  | 2468   | 146  |
| BXRC-30E1000-C-8x | 80  | 150                             | 29.8  | 4.5  | 860   | 774  | 192  |
|                   |     | 225                             | 30.3  | 6.8  | 1254  | 1129   | 184  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1641</b>   | <b>1477</b>  | <b>178</b>                                       |
|                   |     | 360                             | 31.1  | 11.2                                       | 1944  | 1750   | 174  |
|                   |     | 600                             | 32.4  | 19.4                                       | 3106  | 2796   | 160  |
|                   |     | 1000                            | 34.3  | 34.3                                       | 4858  | 4372   | 141  |
| BXRC-30E1000-D-8x | 80  | 125                             | 24.3  | 3.0  | 581   | 523  | 192  |
|                   |     | 185                             | 24.6  | 4.5  | 836   | 753  | 184  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>1108</b>   | <b>997</b>   | <b>178</b>                                       |
|                   |     | 350                             | 25.4  | 8.9  | 1516  | 1365   | 171  |
|                   |     | 500                             | 26.1  | 13.0                                       | 2107  | 1896   | 162  |
|                   |     | 1000                            | 28.1  | 28.1                                       | 3889  | 3500   | 138  |
| BXRC-30G1000-B-8x | 90  | 100                             | 32.9  | 3.3  | 515   | 463  | 157  |
|                   |     | 150                             | 33.6  | 5.0  | 752   | 677  | 149  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>988</b>  | <b>889</b>   | <b>144</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1294  | 1165   | 137  |
|                   |     | 400                             | 36.5  | 14.6                                       | 1838  | 1654   | 126  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2226  | 2004   | 119  |
| BXRC-30G1000-C-8x | 90  | 150                             | 29.8  | 4.5  | 698   | 628  | 156  |
|                   |     | 225                             | 30.3  | 6.8  | 1018  | 916  | 149  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1332</b>   | <b>1199</b>  | <b>144</b>                                       |
|                   |     | 360                             | 31.1  | 11.2                                       | 1578  | 1421   | 141  |
|                   |     | 600                             | 32.4  | 19.4                                       | 2522  | 2269   | 130  |
|                   |     | 1000                            | 34.3  | 34.3                                       | 3943  | 3549   | 115  |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical $V_f$<br>$T_c = 25^\circ\text{C}$ (V) | Typical Power<br>$T_c = 25^\circ\text{C}$ (W) | Typical Flux <sup>2</sup><br>$T_c = 25^\circ\text{C}$ (lm) | Typical DC Flux <sup>3</sup><br>$T_c = 85^\circ\text{C}$ (lm) | Typical Efficacy<br>$T_c = 25^\circ\text{C}$ (lm/W) |
|-------------------|-----|---------------------------------|---|---|--|---|---|
| BXRC-30G1000-D-8x | 90  | 125                             | 24.3  | 3.0   | 472  | 425   | 156   |
|                   |     | 185                             | 24.6  | 4.5   | 679  | 611   | 149   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>899</b>   | <b>809</b>  | <b>144</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1231   | 1108  | 139   |
|                   |     | 500                             | 26.1  | 13.0  | 1710   | 1539  | 131   |
|                   |     | 1000                            | 28.1  | 28.1  | 3157   | 2841  | 112   |
| BXRC-30G10Ho-B-8x | 90  | 100                             | 32.9  | 3.3   | 539  | 485   | 164   |
|                   |     | 150                             | 33.6  | 5.0   | 787  | 709   | 156   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1034</b>  | <b>931</b>  | <b>151</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1355   | 1219  | 143   |
|                   |     | 400                             | 36.5  | 14.6  | 1925   | 1732  | 132   |
|                   |     | 500                             | 37.5  | 18.7  | 2331   | 2098  | 124   |
| BXRC-30G10Ho-C-8x | 90  | 150                             | 29.8  | 4.5   | 731  | 658   | 163   |
|                   |     | 225                             | 30.3  | 6.8   | 1066   | 960   | 156   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1395</b>  | <b>1255</b>   | <b>151</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 1653   | 1487  | 148   |
|                   |     | 600                             | 32.4  | 19.4  | 2640   | 2376  | 136   |
|                   |     | 1000                            | 34.3  | 34.3  | 4129   | 3716  | 120   |
| BXRC-30G10Ho-D-8x | 90  | 125                             | 24.3  | 3.0   | 494  | 445   | 163   |
|                   |     | 185                             | 24.6  | 4.5   | 711  | 640   | 156   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>942</b>   | <b>848</b>  | <b>151</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1289   | 1160  | 145   |
|                   |     | 500                             | 26.1  | 13.0  | 1791   | 1612  | 137   |
|                   |     | 1000                            | 28.1  | 28.1  | 3305   | 2975  | 118   |
| BXRC-30H1000-B-8x | 97  | 100                             | 32.9  | 3.3   | 466  | 420   | 142   |
|                   |     | 150                             | 33.6  | 5.0   | 681  | 613   | 135   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>895</b>   | <b>805</b>  | <b>131</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1172   | 1055  | 124   |
|                   |     | 400                             | 36.5  | 14.6  | 1665   | 1498  | 114   |
|                   |     | 500                             | 37.5  | 18.7  | 2017   | 1815  | 108   |
| BXRC-30H1000-C-8x | 97  | 150                             | 29.8  | 4.5   | 632  | 569   | 141   |
|                   |     | 225                             | 30.3  | 6.8   | 922  | 830   | 135   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1207</b>  | <b>1086</b>   | <b>131</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 1430   | 1287  | 128   |
|                   |     | 600                             | 32.4  | 19.4  | 2284   | 2056  | 117   |
|                   |     | 1000                            | 34.3  | 34.3  | 3572   | 3215  | 104   |
| BXRC-30H1000-D-8x | 97  | 125                             | 24.3  | 3.0   | 427  | 385   | 141   |
|                   |     | 185                             | 24.6  | 4.5   | 615  | 554   | 135   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>815</b>   | <b>733</b>  | <b>131</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1115   | 1003  | 126   |
|                   |     | 500                             | 26.1  | 13.0  | 1549   | 1394  | 119   |
|                   |     | 1000                            | 28.1  | 28.1  | 2859   | 2573  | 102   |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical V <sub>f</sub><br>T <sub>c</sub> = 25°C (V) | Typical Power<br>T <sub>c</sub> = 25°C (W) | Typical Flux <sup>2</sup><br>T <sub>c</sub> = 25°C (lm) | Typical DC Flux <sup>3</sup><br>T <sub>c</sub> = 85°C (lm) | Typical Efficacy<br>T <sub>c</sub> = 25°C (lm/W) |
|-------------------|-----|---------------------------------|---|--|---|--|--|
| BXRC-35E1000-B-8x | 80  | 100                             | 32.9  | 3.3  | 649   | 584  | 197  |
|                   |     | 150                             | 33.6  | 5.0  | 948   | 853  | 188  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>1246</b>   | <b>1121</b>  | <b>182</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1632  | 1468   | 172  |
|                   |     | 400                             | 36.5  | 14.6                                       | 2318  | 2086   | 159  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2807  | 2526   | 150  |
| BXRC-35E1000-C-8x | 80  | 150                             | 29.8  | 4.5  | 880   | 792  | 197  |
|                   |     | 225                             | 30.3  | 6.8  | 1284  | 1156   | 188  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1680</b>   | <b>1512</b>  | <b>182</b>                                       |
|                   |     | 360                             | 31.1  | 11.2                                       | 1990  | 1791   | 178  |
|                   |     | 600                             | 32.4  | 19.4                                       | 3179  | 2861   | 164  |
|                   |     | 1000                            | 34.3  | 34.3                                       | 4972  | 4475   | 145  |
| BXRC-35E1000-D-8x | 80  | 125                             | 24.3  | 3.0  | 595   | 536  | 196  |
|                   |     | 185                             | 24.6  | 4.5  | 856   | 770  | 188  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>1134</b>   | <b>1021</b>  | <b>182</b>                                       |
|                   |     | 350                             | 25.4  | 8.9  | 1552  | 1397   | 175  |
|                   |     | 500                             | 26.1  | 13.0                                       | 2157  | 1941   | 165  |
|                   |     | 1000                            | 28.1  | 28.1                                       | 3980  | 3582   | 142  |
| BXRC-35G1000-B-8x | 90  | 100                             | 32.9  | 3.3  | 534   | 480  | 162  |
|                   |     | 150                             | 33.6  | 5.0  | 779   | 701  | 155  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>1024</b>   | <b>921</b>   | <b>150</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1341  | 1207   | 142  |
|                   |     | 400                             | 36.5  | 14.6                                       | 1905  | 1714   | 131  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2307  | 2076   | 123  |
| BXRC-35G1000-C-8x | 90  | 150                             | 29.8  | 4.5  | 723   | 651  | 162  |
|                   |     | 225                             | 30.3  | 6.8  | 1055  | 950  | 155  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1380</b>   | <b>1242</b>  | <b>150</b>                                       |
|                   |     | 360                             | 31.1  | 11.2                                       | 1636  | 1472   | 146  |
|                   |     | 600                             | 32.4  | 19.4                                       | 2613  | 2352   | 134  |
|                   |     | 1000                            | 34.3  | 34.3                                       | 4086  | 3678   | 119  |
| BXRC-35G1000-D-8x | 90  | 125                             | 24.3  | 3.0  | 489   | 440  | 161  |
|                   |     | 185                             | 24.6  | 4.5  | 704   | 633  | 155  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>932</b>  | <b>839</b>   | <b>150</b>                                       |
|                   |     | 350                             | 25.4  | 8.9  | 1275  | 1148   | 144  |
|                   |     | 500                             | 26.1  | 13.0                                       | 1772  | 1595   | 136  |
|                   |     | 1000                            | 28.1  | 28.1                                       | 3271  | 2944   | 116  |
| BXRC-40C1001-B-8x | 70  | 100                             | 32.9  | 3.3  | 683   | 615  | 208  |
|                   |     | 150                             | 33.6  | 5.0  | 997   | 898  | 198  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>1310</b>   | <b>1179</b>  | <b>192</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1716  | 1544   | 181  |
|                   |     | 400                             | 36.5  | 14.6                                       | 2437  | 2194   | 167  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2952  | 2657   | 157  |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.



# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical $V_f$<br>$T_c = 25^\circ\text{C}$ (V) | Typical Power<br>$T_c = 25^\circ\text{C}$ (W) | Typical Flux <sup>2</sup><br>$T_c = 25^\circ\text{C}$ (lm) | Typical DC Flux <sup>3</sup><br>$T_c = 85^\circ\text{C}$ (lm) | Typical Efficacy<br>$T_c = 25^\circ\text{C}$ (lm/W) |
|-------------------|-----|---------------------------------|---|---|--|---|---|
| BXRC-40C1001-C-8x | 70  | 150                             | 29.8  | 4.5   | 925  | 833   | 207   |
|                   |     | 225                             | 30.3  | 6.8   | 1350   | 1215  | 198   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1766</b>  | <b>1590</b>   | <b>192</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 2093   | 1884  | 187   |
|                   |     | 600                             | 32.4  | 19.4  | 3344   | 3009  | 172   |
|                   |     | 1000                            | 34.3  | 34.3  | 5229   | 4706  | 152   |
| BXRC-40C1001-D-8x | 70  | 125                             | 24.3  | 3.0   | 626  | 563   | 206   |
|                   |     | 185                             | 24.6  | 4.5   | 900  | 810   | 198   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>1193</b>  | <b>1073</b>   | <b>192</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1632   | 1469  | 184   |
|                   |     | 500                             | 26.1  | 13.0  | 2268   | 2041  | 174   |
|                   |     | 1000                            | 28.1  | 28.1  | 4186   | 3767  | 149   |
| BXRC-40E1000-B-8x | 80  | 100                             | 32.9  | 3.3   | 653  | 588   | 198   |
|                   |     | 150                             | 33.6  | 5.0   | 954  | 858   | 189   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1253</b>  | <b>1128</b>   | <b>183</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1641   | 1477  | 173   |
|                   |     | 400                             | 36.5  | 14.6  | 2331   | 2098  | 160   |
|                   |     | 500                             | 37.5  | 18.7  | 2823   | 2541  | 151   |
| BXRC-40E1000-C-8x | 80  | 150                             | 29.8  | 4.5   | 885  | 796   | 198   |
|                   |     | 225                             | 30.3  | 6.8   | 1291   | 1162  | 189   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1689</b>  | <b>1520</b>   | <b>183</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 2002   | 1801  | 179   |
|                   |     | 600                             | 32.4  | 19.4  | 3198   | 2878  | 164   |
|                   |     | 1000                            | 34.3  | 34.3  | 5001   | 4501  | 146   |
| BXRC-40E1000-D-8x | 80  | 125                             | 24.3  | 3.0   | 598  | 539   | 197   |
|                   |     | 185                             | 24.6  | 4.5   | 861  | 775   | 189   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>1141</b>  | <b>1027</b>   | <b>183</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1561   | 1405  | 176   |
|                   |     | 500                             | 26.1  | 13.0  | 2169   | 1952  | 166   |
|                   |     | 1000                            | 28.1  | 28.1  | 4003   | 3603  | 142   |
| BXRC-40G1000-B-8x | 90  | 100                             | 32.9  | 3.3   | 545  | 490   | 166   |
|                   |     | 150                             | 33.6  | 5.0   | 796  | 716   | 158   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1045</b>  | <b>941</b>  | <b>153</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1369   | 1232  | 145   |
|                   |     | 400                             | 36.5  | 14.6  | 1945   | 1750  | 133   |
|                   |     | 500                             | 37.5  | 18.7  | 2355   | 2120  | 126   |
| BXRC-40G1000-C-8x | 90  | 150                             | 29.8  | 4.5   | 738  | 664   | 165   |
|                   |     | 225                             | 30.3  | 6.8   | 1077   | 970   | 158   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1409</b>  | <b>1268</b>   | <b>153</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 1670   | 1503  | 149   |
|                   |     | 600                             | 32.4  | 19.4  | 2668   | 2401  | 137   |
|                   |     | 1000                            | 34.3  | 34.3  | 4172   | 3755  | 121   |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical V <sub>f</sub><br>T <sub>c</sub> = 25°C (V) | Typical Power<br>T <sub>c</sub> = 25°C (W) | Typical Flux <sup>2</sup><br>T <sub>c</sub> = 25°C (lm) | Typical DC Flux <sup>3</sup><br>T <sub>c</sub> = 85°C (lm) | Typical Efficacy<br>T <sub>c</sub> = 25°C (lm/W) |
|-------------------|-----|---------------------------------|---|--|---|--|--|
| BXRC-40G1000-D-8x | 90  | 125                             | 24.3  | 3.0  | 499   | 449  | 165  |
|                   |     | 185                             | 24.6  | 4.5  | 718   | 646  | 158  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>952</b>  | <b>856</b>   | <b>153</b>                                       |
|                   |     | 350                             | 25.4  | 8.9  | 1302  | 1172   | 147  |
|                   |     | 500                             | 26.1  | 13.0                                       | 1810  | 1629   | 139  |
|                   |     | 1000                            | 28.1  | 28.1                                       | 3340  | 3006   | 119  |
| BXRC-50C1001-B-8x | 70  | 100                             | 32.9  | 3.3  | 687   | 618  | 209  |
|                   |     | 150                             | 33.6  | 5.0  | 1003  | 902  | 199  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>1317</b>   | <b>1186</b>  | <b>193</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1725  | 1553   | 182  |
|                   |     | 400                             | 36.5  | 14.6                                       | 2451  | 2206   | 168  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2968  | 2671   | 158  |
| BXRC-50C1001-C-8x | 70  | 150                             | 29.8  | 4.5  | 930   | 837  | 208  |
|                   |     | 225                             | 30.3  | 6.8  | 1358  | 1222   | 199  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1776</b>   | <b>1599</b>  | <b>193</b>                                       |
|                   |     | 360                             | 31.1  | 11.2                                       | 2105  | 1894   | 188  |
|                   |     | 600                             | 32.4  | 19.4                                       | 3362  | 3026   | 173  |
|                   |     | 1000                            | 34.3  | 34.3                                       | 5258  | 4732   | 153  |
| BXRC-50C1001-D-8x | 70  | 125                             | 24.3  | 3.0  | 629   | 566  | 207  |
|                   |     | 185                             | 24.6  | 4.5  | 905   | 815  | 199  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>1199</b>   | <b>1079</b>  | <b>193</b>                                       |
|                   |     | 350                             | 25.4  | 8.9  | 1641  | 1477   | 185  |
|                   |     | 500                             | 26.1  | 13.0                                       | 2281  | 2053   | 175  |
|                   |     | 1000                            | 28.1  | 28.1                                       | 4209  | 3788   | 150  |
| BXRC-50E1001-B-8x | 80  | 100                             | 32.9  | 3.3  | 661   | 594  | 201  |
|                   |     | 150                             | 33.6  | 5.0  | 965   | 868  | 192  |
|                   |     | <b>200</b>                      | <b>34.2</b>   | <b>6.8</b>                                 | <b>1267</b>   | <b>1140</b>  | <b>185</b>                                       |
|                   |     | 270                             | 35.0  | 9.5  | 1660  | 1494   | 175  |
|                   |     | 400                             | 36.5  | 14.6                                       | 2358  | 2122   | 162  |
|                   |     | 500                             | 37.5  | 18.7                                       | 2855  | 2570   | 152  |
| BXRC-50E1001-C-8x | 80  | 150                             | 29.8  | 4.5  | 895   | 806  | 200  |
|                   |     | 225                             | 30.3  | 6.8  | 1306  | 1175   | 192  |
|                   |     | <b>300</b>                      | <b>30.7</b>   | <b>9.2</b>                                 | <b>1709</b>   | <b>1538</b>  | <b>185</b>                                       |
|                   |     | 360                             | 31.1  | 11.2                                       | 2025  | 1822   | 181  |
|                   |     | 600                             | 32.4  | 19.4                                       | 3234  | 2911   | 166  |
|                   |     | 1000                            | 34.3  | 34.3                                       | 5058  | 4552   | 147  |
| BXRC-50E1001-D-8x | 80  | 125                             | 24.3  | 3.0  | 605   | 545  | 199  |
|                   |     | 185                             | 24.6  | 4.5  | 871   | 784  | 192  |
|                   |     | <b>250</b>                      | <b>24.9</b>   | <b>6.2</b>                                 | <b>1154</b>   | <b>1038</b>  | <b>185</b>                                       |
|                   |     | 350                             | 25.4  | 8.9  | 1579  | 1421   | 178  |
|                   |     | 500                             | 26.1  | 13.0                                       | 2194  | 1974   | 168  |
|                   |     | 1000                            | 28.1  | 28.1                                       | 4049  | 3644   | 144  |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical $V_f$<br>$T_c = 25^\circ\text{C}$ (V) | Typical Power<br>$T_c = 25^\circ\text{C}$ (W) | Typical Flux <sup>2</sup><br>$T_c = 25^\circ\text{C}$ (lm) | Typical DC Flux <sup>3</sup><br>$T_c = 85^\circ\text{C}$ (lm) | Typical Efficacy<br>$T_c = 25^\circ\text{C}$ (lm/W) |
|-------------------|-----|---------------------------------|---|---|--|---|---|
| BXRC-50G1001-B-8x | 90  | 100                             | 32.9  | 3.3   | 571  | 514   | 174   |
|                   |     | 150                             | 33.6  | 5.0   | 834  | 750   | 166   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1095</b>  | <b>986</b>  | <b>160</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1435   | 1291  | 152   |
|                   |     | 400                             | 36.5  | 14.6  | 2038   | 1834  | 140   |
|                   |     | 500                             | 37.5  | 18.7  | 2468   | 2221  | 132   |
| BXRC-50G1001-C-8x | 90  | 150                             | 29.8  | 4.5   | 774  | 696   | 173   |
|                   |     | 225                             | 30.3  | 6.8   | 1129   | 1016  | 166   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1477</b>  | <b>1329</b>   | <b>160</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 1750   | 1575  | 156   |
|                   |     | 600                             | 32.4  | 19.4  | 2796   | 2516  | 144   |
|                   |     | 1000                            | 34.3  | 34.3  | 4372   | 3935  | 127   |
| BXRC-50G1001-D-8x | 90  | 125                             | 24.3  | 3.0   | 523  | 471   | 172   |
|                   |     | 185                             | 24.6  | 4.5   | 753  | 677   | 166   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>997</b>   | <b>897</b>  | <b>160</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1365   | 1228  | 154   |
|                   |     | 500                             | 26.1  | 13.0  | 1896   | 1707  | 145   |
|                   |     | 1000                            | 28.1  | 28.1  | 3500   | 3150  | 125   |
| BXRC-57C1001-B-8x | 70  | 100                             | 32.9  | 3.3   | 668  | 601   | 203   |
|                   |     | 150                             | 33.6  | 5.0   | 975  | 878   | 194   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1281</b>  | <b>1153</b>   | <b>187</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1678   | 1511  | 177   |
|                   |     | 400                             | 36.5  | 14.6  | 2384   | 2146  | 163   |
|                   |     | 500                             | 37.5  | 18.7  | 2888   | 2599  | 154   |
| BXRC-57C1001-C-8x | 70  | 150                             | 29.8  | 4.5   | 905  | 815   | 202   |
|                   |     | 225                             | 30.3  | 6.8   | 1321   | 1189  | 194   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1728</b>  | <b>1555</b>   | <b>187</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 2047   | 1843  | 183   |
|                   |     | 600                             | 32.4  | 19.4  | 3271   | 2944  | 168   |
|                   |     | 1000                            | 34.3  | 34.3  | 5115   | 4604  | 149   |
| BXRC-57C1001-D-8x | 70  | 125                             | 24.3  | 3.0   | 612  | 551   | 202   |
|                   |     | 185                             | 24.6  | 4.5   | 881  | 793   | 194   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>1167</b>  | <b>1050</b>   | <b>187</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1597   | 1437  | 180   |
|                   |     | 500                             | 26.1  | 13.0  | 2219   | 1997  | 170   |
|                   |     | 1000                            | 28.1  | 28.1  | 4094   | 3685  | 146   |
| BXRC-57E1001-B-8x | 80  | 100                             | 32.9  | 3.3   | 634  | 571   | 193   |
|                   |     | 150                             | 33.6  | 5.0   | 926  | 834   | 184   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1217</b>  | <b>1095</b>   | <b>178</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1594   | 1435  | 169   |
|                   |     | 400                             | 36.5  | 14.6  | 2264   | 2038  | 155   |
|                   |     | 500                             | 37.5  | 18.7  | 2742   | 2468  | 146   |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical $V_f$<br>$T_c = 25^\circ\text{C}$ (V) | Typical Power<br>$T_c = 25^\circ\text{C}$ (W) | Typical Flux <sup>2</sup><br>$T_c = 25^\circ\text{C}$ (lm) | Typical DC Flux <sup>3</sup><br>$T_c = 85^\circ\text{C}$ (lm) | Typical Efficacy<br>$T_c = 25^\circ\text{C}$ (lm/W) |
|-------------------|-----|---------------------------------|---|---|--|---|---|
| BXRC-57E1001-C-8x | 80  | 150                             | 29.8  | 4.5   | 860  | 774   | 192   |
|                   |     | 225                             | 30.3  | 6.8   | 1254   | 1129  | 184   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1641</b>  | <b>1477</b>   | <b>178</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 1944   | 1750  | 174   |
|                   |     | 600                             | 32.4  | 19.4  | 3106   | 2796  | 160   |
|                   |     | 1000                            | 34.3  | 34.3  | 4858   | 4372  | 141   |
| BXRC-57E1001-D-8x | 80  | 125                             | 24.3  | 3.0   | 581  | 523   | 192   |
|                   |     | 185                             | 24.6  | 4.5   | 836  | 753   | 184   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>1108</b>  | <b>997</b>  | <b>178</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1516   | 1365  | 171   |
|                   |     | 500                             | 26.1  | 13.0  | 2107   | 1896  | 162   |
|                   |     | 1000                            | 28.1  | 28.1  | 3889   | 3500  | 138   |
| BXRC-65C1001-B-8x | 70  | 100                             | 32.9  | 3.3   | 668  | 601   | 203   |
|                   |     | 150                             | 33.6  | 5.0   | 975  | 878   | 194   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1281</b>  | <b>1153</b>   | <b>187</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1678   | 1511  | 177   |
|                   |     | 400                             | 36.5  | 14.6  | 2384   | 2146  | 163   |
|                   |     | 500                             | 37.5  | 18.7  | 2888   | 2599  | 154   |
| BXRC-65C1001-C-8x | 70  | 150                             | 29.8  | 4.5   | 905  | 815   | 202   |
|                   |     | 225                             | 30.3  | 6.8   | 1321   | 1189  | 194   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1728</b>  | <b>1555</b>   | <b>187</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 2047   | 1843  | 183   |
|                   |     | 600                             | 32.4  | 19.4  | 3271   | 2944  | 168   |
|                   |     | 1000                            | 34.3  | 34.3  | 5115   | 4604  | 149   |
| BXRC-65C1001-D-8x | 70  | 125                             | 24.3  | 3.0   | 612  | 551   | 202   |
|                   |     | 185                             | 24.6  | 4.5   | 881  | 793   | 194   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>1167</b>  | <b>1050</b>   | <b>187</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1597   | 1437  | 180   |
|                   |     | 500                             | 26.1  | 13.0  | 2219   | 1997  | 170   |
|                   |     | 1000                            | 28.1  | 28.1  | 4094   | 3685  | 146   |
| BXRC-65E1001-B-8x | 80  | 100                             | 32.9  | 3.3   | 642  | 578   | 195   |
|                   |     | 150                             | 33.6  | 5.0   | 937  | 844   | 186   |
|                   |     | <b>200</b>                      | <b>34.2</b>                                   | <b>6.8</b>                                    | <b>1231</b>  | <b>1108</b>   | <b>180</b>  |
|                   |     | 270                             | 35.0  | 9.5   | 1613   | 1452  | 171   |
|                   |     | 400                             | 36.5  | 14.6  | 2291   | 2062  | 157   |
|                   |     | 500                             | 37.5  | 18.7  | 2775   | 2497  | 148   |
| BXRC-65E1001-C-8x | 80  | 150                             | 29.8  | 4.5   | 870  | 783   | 194   |
|                   |     | 225                             | 30.3  | 6.8   | 1269   | 1142  | 186   |
|                   |     | <b>300</b>                      | <b>30.7</b>                                   | <b>9.2</b>                                    | <b>1660</b>  | <b>1494</b>   | <b>180</b>  |
|                   |     | 360                             | 31.1  | 11.2  | 1967   | 1771  | 176   |
|                   |     | 600                             | 32.4  | 19.4  | 3143   | 2829  | 162   |
|                   |     | 1000                            | 34.3  | 34.3  | 4915   | 4424  | 143   |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

| Part Number       | CRI | Drive Current <sup>1</sup> (mA) | Typical $V_f$<br>$T_c = 25^\circ\text{C}$ (V) | Typical Power<br>$T_c = 25^\circ\text{C}$ (W) | Typical Flux <sup>2</sup><br>$T_c = 25^\circ\text{C}$ (lm) | Typical DC Flux <sup>3</sup><br>$T_c = 85^\circ\text{C}$ (lm) | Typical Efficacy<br>$T_c = 25^\circ\text{C}$ (lm/W) |
|-------------------|-----|---------------------------------|---|---|--|---|---|
| BXRC-65E1001-D-8x | 80  | 125                             | 24.3  | 3.0   | 588  | 529   | 194   |
|                   |     | 185                             | 24.6  | 4.5   | 846  | 762   | 186   |
|                   |     | <b>250</b>                      | <b>24.9</b>                                   | <b>6.2</b>                                    | <b>1121</b>  | <b>1009</b>   | <b>180</b>  |
|                   |     | 350                             | 25.4  | 8.9   | 1534   | 1381  | 173   |
|                   |     | 500                             | 26.1  | 13.0  | 2132   | 1919  | 164   |
|                   |     | 1000                            | 28.1  | 28.1  | 3934   | 3541  | 140   |

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Electrical Characteristics

**Table 5:** Electrical Characteristics

| Part Number       | Drive Current (mA) | Forward Voltage Pulsed, $T_c = 25^\circ\text{C}$ (V) <sup>1, 2, 3, 8</sup> |         |         | Typical Coefficient of Forward Voltage <sup>4</sup><br>$\Delta V_f / \Delta T_c$ (mV/ $^\circ\text{C}$ ) | Typical Thermal Resistance Junction to Case <sup>5,6</sup><br>$R_{j-c}$ ( $^\circ\text{C}/\text{W}$ ) | Driver Selection Voltages <sup>7</sup> (V)      |  |
|-------------------|--------------------|--|---------|---------|--|---|---|--|
|                   |                    | Minimum  | Typical | Maximum |  |   | $V_f$ Min. Hot<br>$T_c = 105^\circ\text{C}$ (V) | $V_f$ Max. Cold<br>$T_c = -40^\circ\text{C}$ (V) |
|                   |                    |  |         |         |  |   |   |  |
| BXRC-xxx100x-B-8x | 200                | 31.6   | 34.2    | 36.8    | -11.03   | 0.62  | 30.8  | 37.5   |
|                   | 500                | 34.7   | 37.5    | 40.3    | -12.10   | 0.95  | 33.7  | 41.1   |
| BXRC-xxx100x-C-8x | 300                | 28.4   | 30.7    | 33.0    | -9.90  | 0.38  | 27.6  | 33.6   |
|                   | 1000               | 32.4   | 35      | 37.6    | -11.29   | 0.55  | 31.5  | 38.4   |
| BXRC-xxx100x-D-8x | 250                | 23.0   | 24.9    | 26.8    | -8.03  | 0.37  | 22.4  | 27.3   |
|                   | 1000               | 26.9   | 29.1    | 31.3    | -9.39  | 0.55  | 26.2  | 31.9   |

Notes for Table 5:

- Parts are tested in pulsed conditions,  $T_c = 25^\circ\text{C}$ . Pulse width is 10ms.
- Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
- Bridgelux maintains a tester tolerance of  $\pm 0.10\text{V}$  on forward voltage measurements.
- Typical coefficient of forward voltage tolerance is  $\pm 0.1\text{mV}$  for nominal current.
- Thermal resistance values are based from test data of a 3000K 80 CRI product.
- Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power. The thermal interface material used during testing is not included in the thermal resistance value.
- $V_f$  min hot and max cold values are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.
- This product has been designed and manufactured per IEC 62031:2018. This product has passed dielectric withstand voltage testing at 1140 V. The working voltage designated for the insulation is 70V d.c. The maximum allowable voltage across the array must be determined in the end product application.

# Eye Safety

**Table 6:** Eye Safety Risk Group (RG) Classifications

| Part Number       | Drive Current (mA) | CCT <sup>5</sup> |                    |                    |                    |
|-------------------|--------------------|------------------|--------------------|--------------------|--------------------|
|                   |                    | 2700K/3000K      | 4000K <sup>2</sup> | 5000K <sup>3</sup> | 6500K <sup>4</sup> |
| BXRC-xxx100x-B-8x | 355                | RG1              | RG1                | RG1                | RG1                |
|                   | 500                | RG1              | RG1                | RG1                | RG2                |
| BXRC-xxx100x-C-8x | 395                | RG1              | RG1                | RG1                | RG1                |
|                   | 550                | RG1              | RG1                | RG1                | RG2                |
|                   | 730                | RG1              | RG1                | RG2                | RG2                |
|                   | 1000               | RG1              | RG2                | RG2                | RG2                |
| BXRC-xxx100x-D-8x | 490                | RG1              | RG1                | RG1                | RG1                |
|                   | 680                | RG1              | RG1                | RG1                | RG2                |
|                   | 900                | RG1              | RG1                | RG2                | RG2                |
|                   | 1000               | RG1              | RG2                | RG2                | RG2                |

Notes for Table 6:

1. Eye safety classification for the use of Bridgelux Vero Series LED arrays is in accordance with specification IEC/TR 62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires.
2. For products classified as RG2 at 4000K, Ethr- 1980 lx.
3. For products classified as RG2 at 5000K Ethr- 1530 lx.
4. For products classified as RG2 at 6500K, Ethr- 1170 lx.
5. Please contact your Bridgelux sales representative for Ethr values at specific drive currents and CCTs not listed.

# Absolute Maximum Ratings

**Table 7:** Maximum Ratings

| Parameter   | Maximum Rating                            |                   |                   |
|---|---|-------------------|-------------------|
| LED Junction Temperature ( $T_j$ )                | 150°C                                     |                   |                   |
| Storage Temperature                               | -40°C to +105°C                           |                   |                   |
| Operating Case Temperature <sup>1</sup> ( $T_c$ ) | 105°C                                     |                   |                   |
| Soldering Temperature <sup>2</sup>                | 300°C or lower for a maximum of 6 seconds |                   |                   |
|   | BXRC-xxx100x-B-8x                         | BXRC-xxx100x-C-8x | BXRC-xxx100x-D-8x |
| Maximum Drive Current <sup>3</sup>                | 500 mA                                    | 1000 mA           | 1000 mA           |
| Maximum Peak Pulsed Drive Current <sup>4</sup>    | 560 mA                                    | 1120 mA           | 1120 mA           |
| Maximum Reverse Voltage <sup>5</sup>              | -60V                                      | -55V              | -45V              |


Notes for Table 7:

1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Refer to Bridgelux Application Note AN31: Assembly Considerations for Bridgelux Vero LED Arrays.
3. Arrays may be driven at higher currents however lumen maintenance may be reduced and warranty will not apply.
4. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 20 ms when operating LED Arrays at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where LED Arrays can be driven without catastrophic failures.
5. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.




# Performance Curves


**Figure 1: Vero 10B Drive Current vs. Voltage**

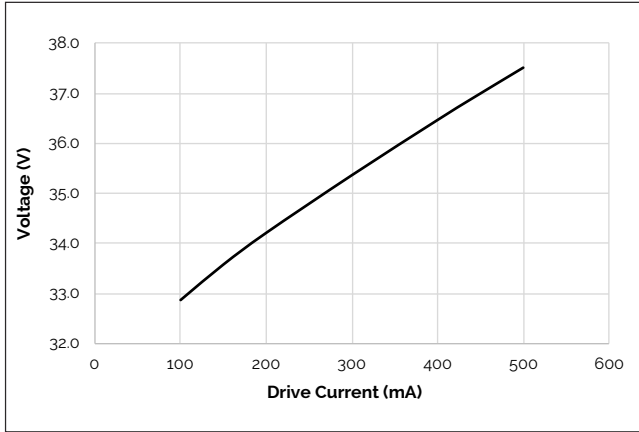


**Figure 2: Vero 10C Drive Current vs. Voltage**

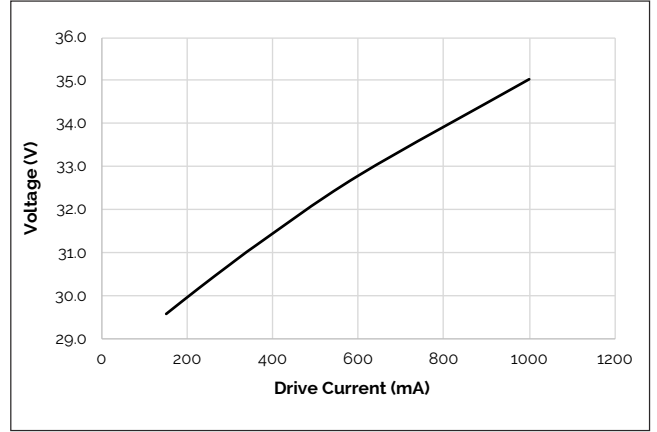


**Figure 3: Vero 10D Drive Current vs. Voltage**

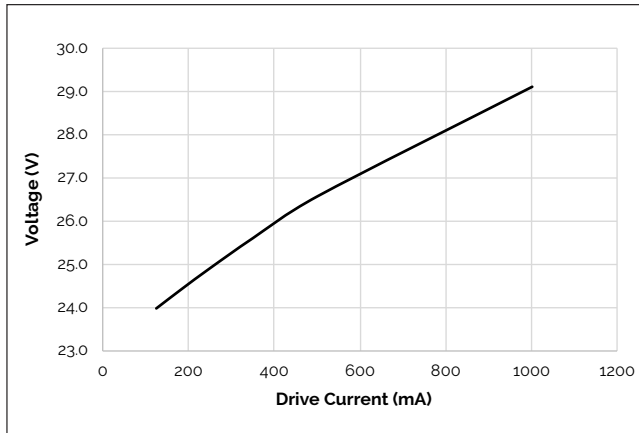


**Figure 4: Vero 10B Typical Relative Flux vs. Current**

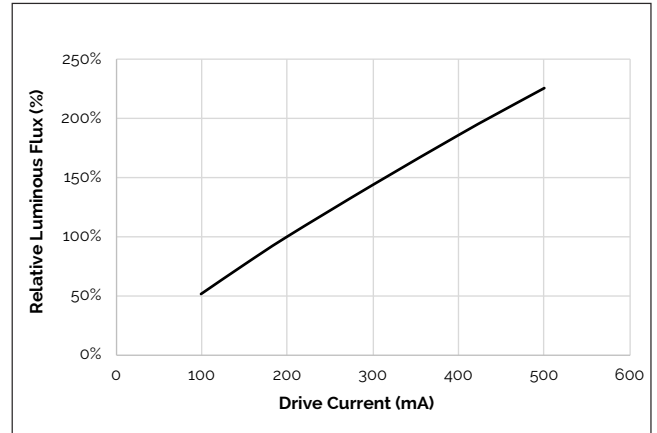

**Figure 5: Vero 10C Typical Relative Flux vs. Current**

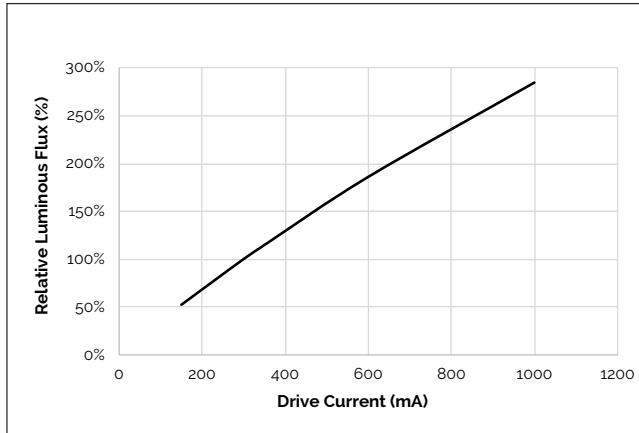

**Figure 6 Vero 10D Typical Relative Flux vs. Current**

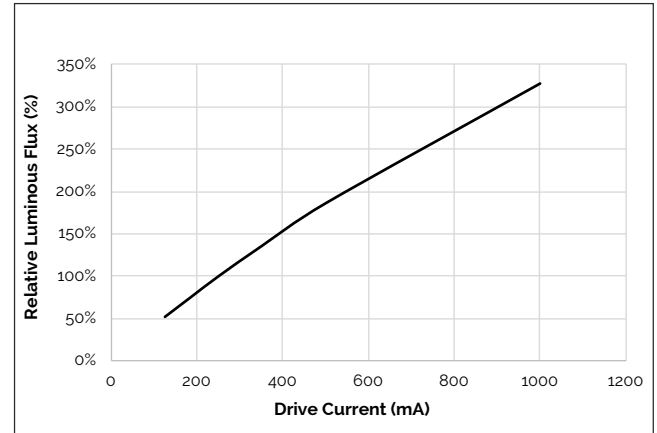

Notes for Figures 1-6:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.
2. Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) =  $T_c$  (case temperature) = 25°C.

# Performance Curves

Figure 7: Typical DC Flux vs. Case Temperature

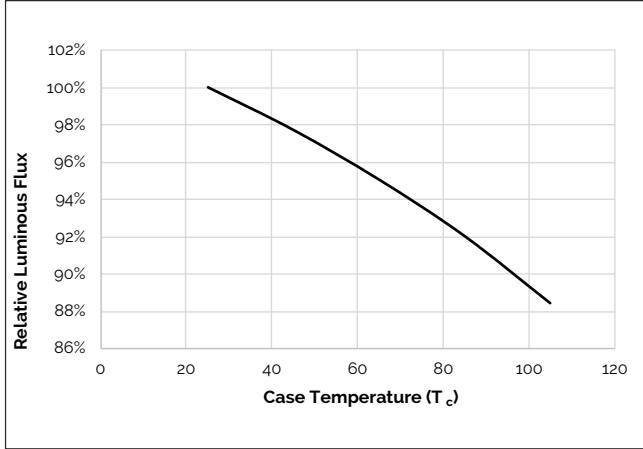


Figure 8: Typical DC ccy Shift vs. Case Temperature


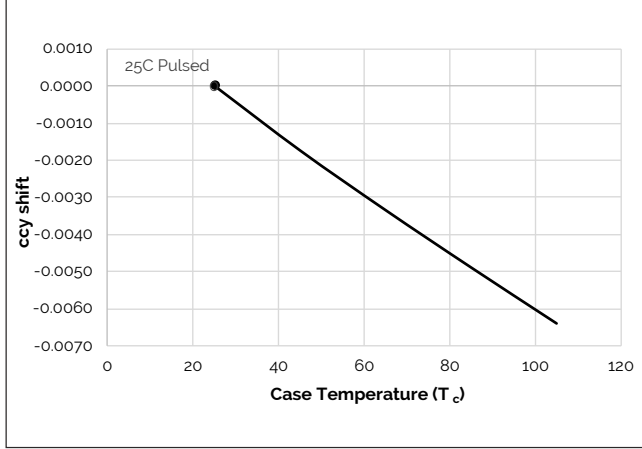



Figure 9: Typical DC ccx Shift vs. Case Temperature

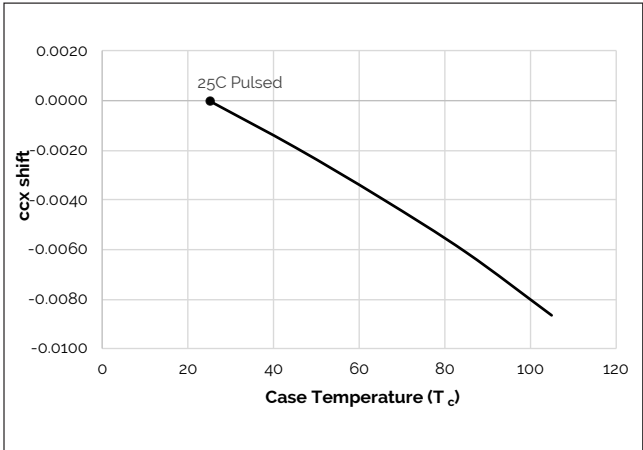

Note for Figures 7-9:  
1. Characteristics shown for Warm White

# Typical Radiation Pattern


Figure 10: Typical Spatial Radiation Pattern

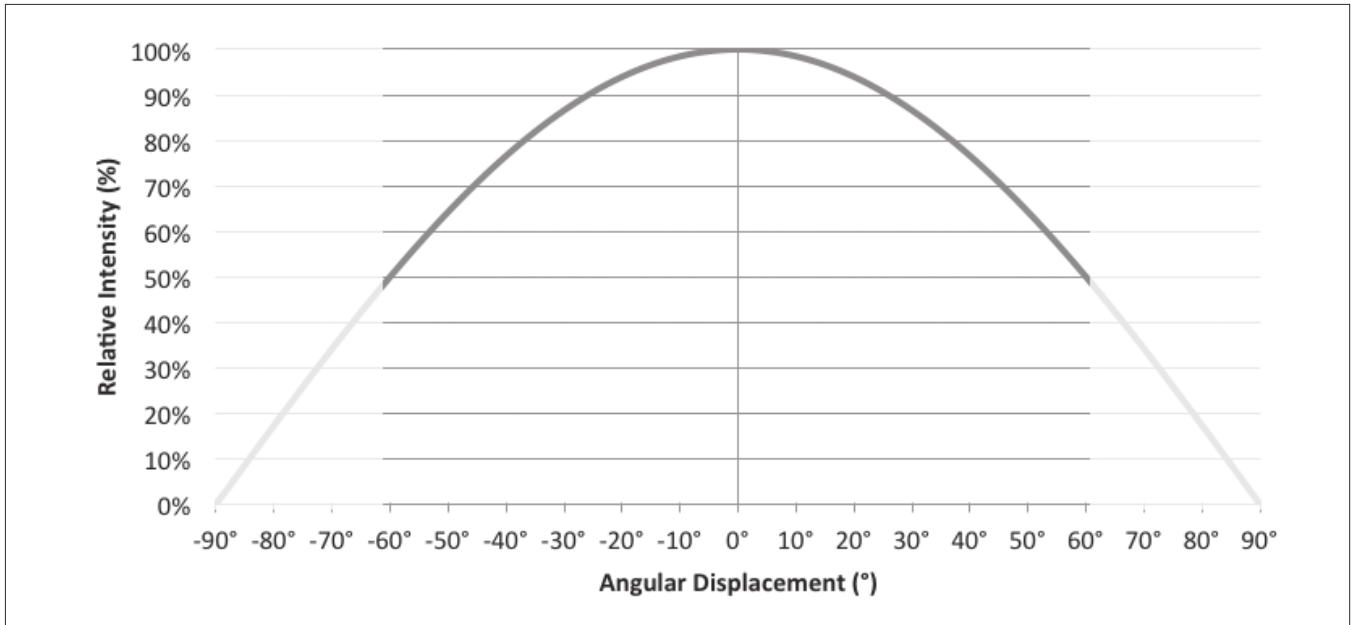

Notes for Figure 10:


1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where intensity is ½ of the peak value.

Figure 11: Typical Polar Radiation Pattern

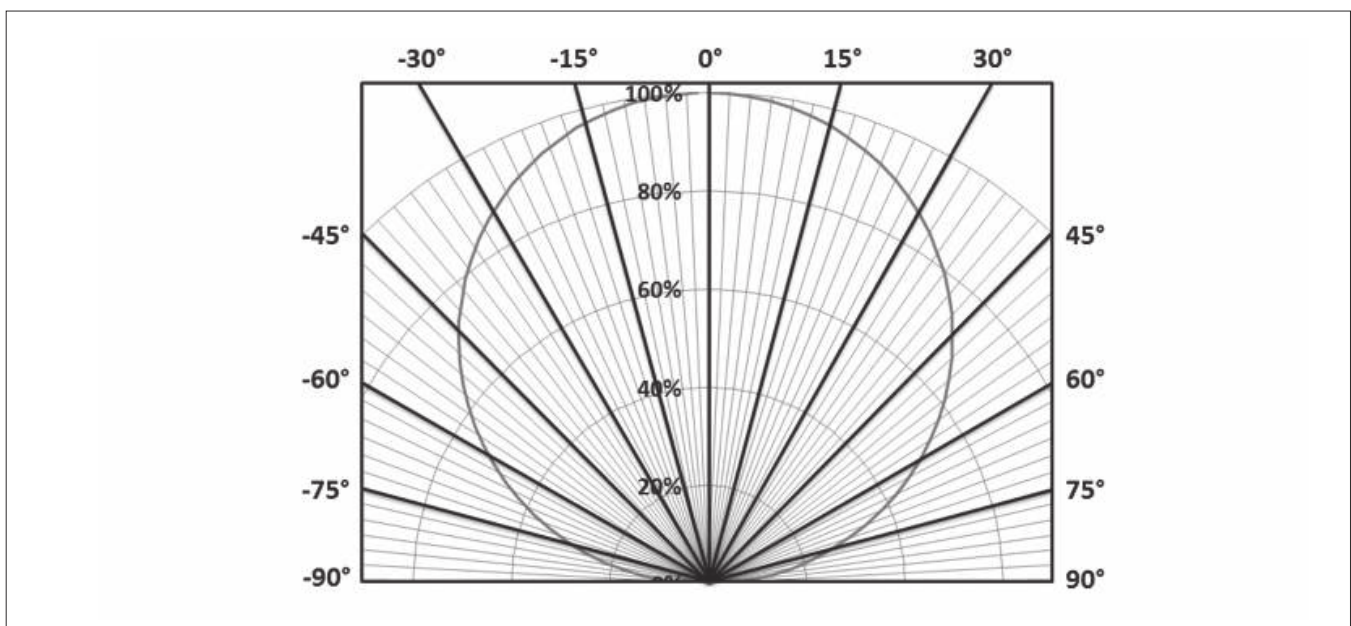

# Typical Color Spectrum

Figure 12: Typical Color Spectrum

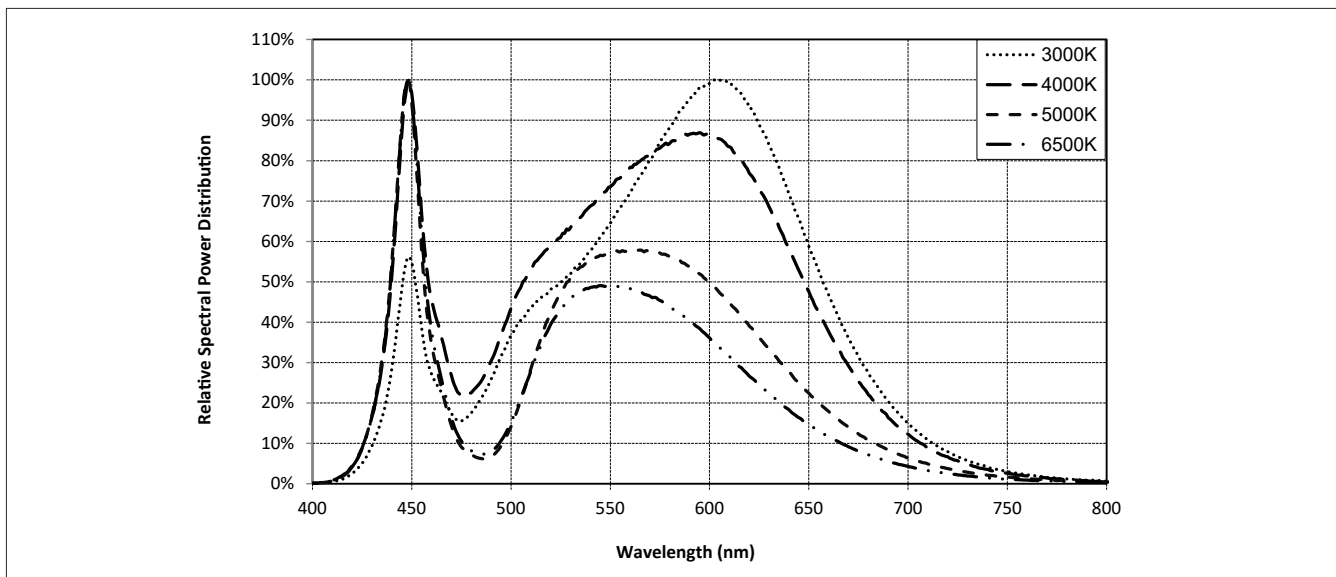


Notes for Figure 12:

1. Color spectra measured at nominal current for  $T_j = T_c = 25^\circ\text{C}$ .
2. Color spectra shown is 3000K and 80 CRI.
3. Color spectra shown is 4000K and 80 CRI.
4. Color spectra shown is 5000K and 70 CRI.
4. Color spectra shown is 6500K and 70 CRI.

# Mechanical Dimensions

**Figure 13: Drawing for Vero 10 LED Array**

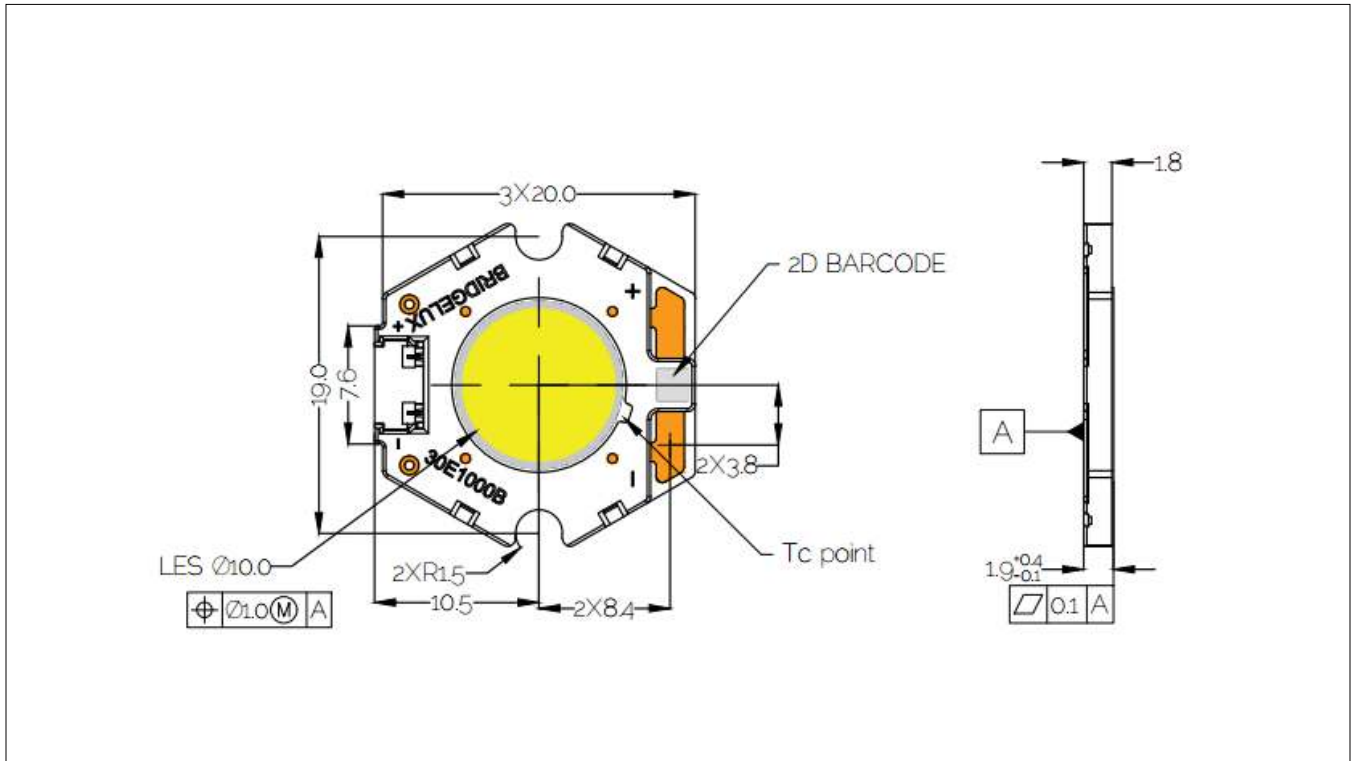


Notes for Figure 13:

1. Drawings are not to scale.
2. Dimensions are in mm.
3. Unless otherwise specified, tolerances are  $\pm 0.10\text{mm}$ .
4. Mounting slots (2X) are for M2.5 screws.
5. Bridgelux recommends two tapped holes for mounting screws with  $19.0 \pm 0.10\text{mm}$  center-to-center spacing.
6. Screws with flat shoulders (pan, dome, button, round, truss, mushroom) provide optimal torque control. Do NOT use flat, countersink, or raised head screws.
7. Solder pads and connector port are labeled "+" and "-" to denote positive and negative, respectively.
8. It is not necessary to provide electrical connections to both the solder pads and the connector port. Either set may be used depending on application specific design requirements.
9. Refer to Application Notes AN30 and AN31 for product handling, mounting and heat sink recommendations.
10. The optical center of the LED Array is nominally defined by the mechanical center of the array to a tolerance of  $\pm 0.2\text{mm}$ .
11. Bridgelux maintains a flatness of 0.10mm across the mounting surface of the array.


# Color Binning Information

**Figure 14: Warm and Neutral White Test Bins in xy Color Space**

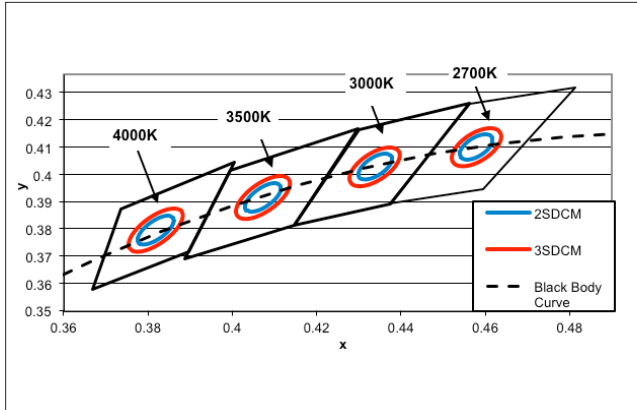

Note: Pulsed Test Conditions,  $T_c = 25^\circ\text{C}$

**Figure 15: Graph of Cool White Test Bins in xy Color Space**

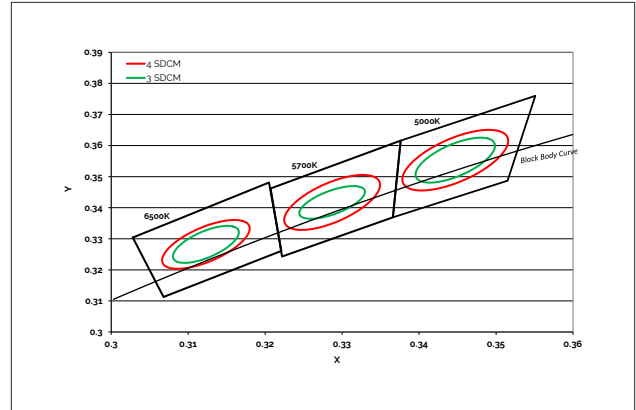

Note: Pulsed Test Conditions,  $T_c = 25^\circ\text{C}$

**Table 8: Warm and Neutral White xy Bin Coordinates and Associated Typical CCT**

| Bin Code                      | 2700K            | 3000K           | 3500K            | 4000K            |
|-------------------------------|------------------|-----------------|------------------|------------------|
| ANSI Bin (for reference only) | (2580K - 2870K)  | (2870K - 3220K) | (3220K - 3710K)  | (3710K - 4260K)  |
| 83 (3 SDCM)                   | (2651K - 2794K)  | (2968K - 3136K) | (3369K - 3586K)  | (3851K - 4130K)  |
| 82 (2 SDCM)                   | (2674K - 2769K)  | (2995K - 3107K) | (3404K - 3548K)  | (3895K - 4081K)  |
| Center Point (x,y)            | (0.4578, 0.4101) | (0.4338, 0.403) | (0.4073, 0.3917) | (0.3818, 0.3797) |

**Table 9: Cool White xy Bin Coordinates and Associated Typical CCT (product is hot targeted to  $T_c = 85^\circ\text{C}$ )**


| Bin Code                      | 5000K            | 5700K            | 6500K            |
|-------------------------------|------------------|------------------|------------------|
| ANSI Bin (for reference only) | (4745K - 5311K)  | (5312K - 6022K)  | (6022K - 7042K)  |
| 84 (4 SDCM)                   | (4801K - 5282K)  | (5395K - 5970K)  | (6200K - 6910K)  |
| 83 (3 SDCM)                   | (4835K - 5215K)  | (5460K - 5891K)  | (6279K - 6811K)  |
| Center Point (x,y)            | (0.3447, 0.3553) | (0.3287, 0.3417) | (0.3123, 0.3282) |

Note for Tables 8-g:

1. Bridgelux maintains a tolerance of +/- 0.007 on x and y color coordinates in the CIE 1931 color Space.

# Packaging and Labeling


Figure 16: Drawing for Vero 10 Packaging Tray

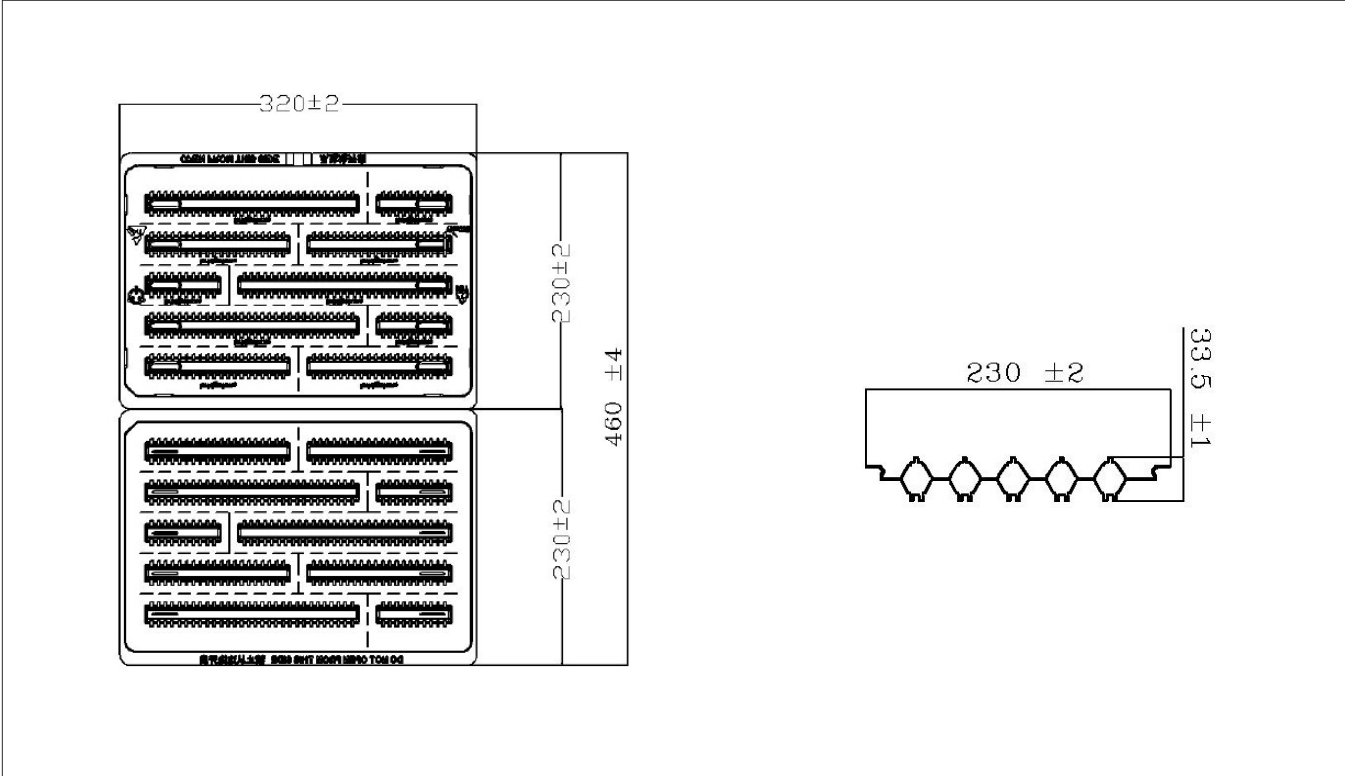

- Notes for Figure 16:
1. Dimensions are in millimeters.
  2. Drawings are not to scale.

# Packaging and Labeling

**Figure 17: Vero Series Packaging and Labeling**

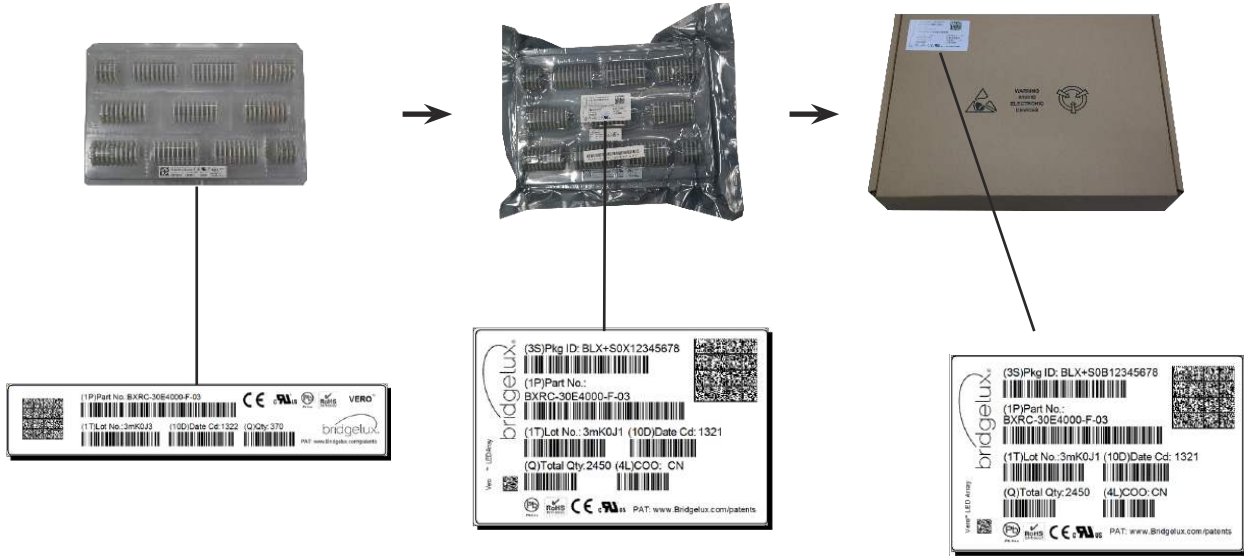

Notes for Figure 17:

1. Each tray holds 200 COBs.
2. Each tray is vacuum sealed in an anti-static bag and placed in its own box.
3. Each tray, bag and box is to be labeled as shown above.

**Figure 18: Gen. 8 Product Labeling**

Bridgelux COB arrays have laser markings on the back side of the substrate to help with product identification. In addition to the product identification markings, Bridgelux COB arrays also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the COB array.



Customer Use- 2D Barcode  
Scannable barcode provides product part number and other Bridgelux internal production information.

Customer Use- Product part number

**30E1000C 83 2F**

Customer Use- V<sub>f</sub> Bin Code included to enable greater luminaire design flexibility. Refer to ANG2 for bin code definitions.



# Design Resources

## Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the Vero product family of LED array products. For all available application notes visit [www.bridgelux.com](http://www.bridgelux.com).

## Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit [www.bridgelux.com](http://www.bridgelux.com).

## 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux Vero LED arrays are available in both IGS and STEP formats. Please contact your Bridgelux sales representative for assistance.

## LM80

LM80 testing has been completed and the LM80 report is now available. Please contact your Bridgelux sales representative for LM-80 report.

# Precautions

## CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note AN31 for additional information.

## CAUTION: RISK OF BURN

Do not touch the Vero LED array during operation. Allow the array to cool for a sufficient period of time before handling. The Vero LED array may reach elevated temperatures such that could burn skin when touched.

## CAUTION

### CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the LED array or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area). Optical devices may be mounted on the top surface of the plastic housing of the Vero LED array. Use the mechanical features of the LED array housing, edges and/or mounting holes to locate and secure optical devices as needed.

# Disclaimers

## MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

## STANDARD TEST CONDITIONS

Unless otherwise stated, array testing is performed at the nominal drive current.

# About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

**For more information about the company, please visit**  
**bridgelux.com**  
**twitter.com/Bridgelux**  
**facebook.com/Bridgelux**  
**youtube.com/user/Bridgelux**  
**linkedin.com/company/bridgelux-inc-\_2**  
**WeChat ID: BridgeluxInChina**



46410 Fremont Boulevard  
Fremont, CA 94538 U.S.A.  
Tel (925) 583-8400  
[www.bridgelux.com](http://www.bridgelux.com)

© 2021 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux, the Bridgelux stylized logo design, Vero, V Series and V Series HD are registered trademarks, and Decor Series is a trademark of Bridgelux, Inc. All other trademarks are the property of their respective owners.

Bridgelux Gen 8 Vero 10 Array Series Product Data Sheet DS420 Rev. C (08/2021)