


PART NO.		RFD-43M-NM		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	06/23/15	JDMc

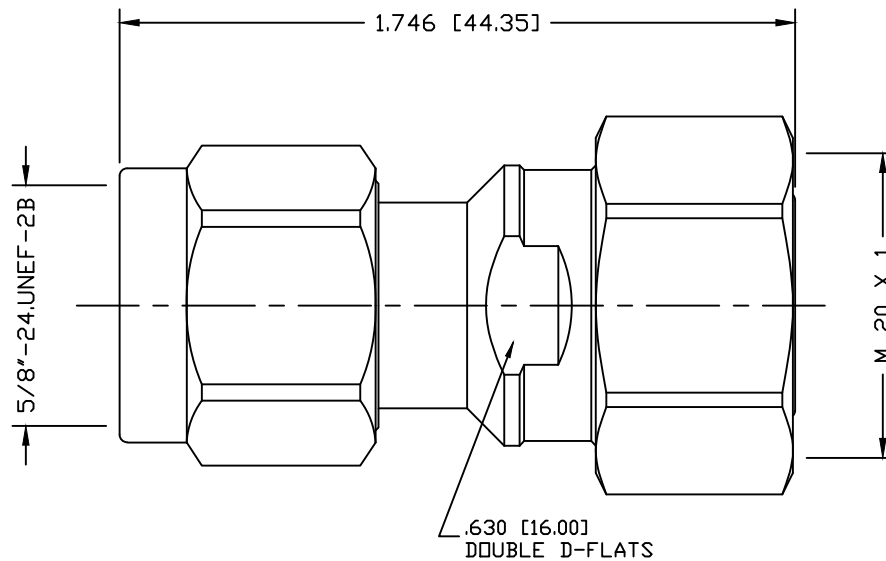

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 VSWR: ≤1.15
 3rd ORDER IM: <-160 dBc @ 1900 MHz
 DIELECTRIC WITHSTANDING VOLTAGE: 2000V/AC
 INSULATION RESISTANCE: 1000MΩ
 OPERATING TEMPERATURE: -40° to +155°

9	COUPLING NUT	1	BRASS	WHITE BRONZE
8	O-RING	1	S.I. RUBBER	RED
7	RETAINING RING	1	BRASS	WHITE BRONZE
6	N COUPLING NUT	1	BRASS	WHITE BRONZE
5	GASKET	1	S.I. RUBBER	RED
4	RETAINING RING	1	BRASS	WHITE BRONZE
3	DIELECTRIC	1	PTFE	NONE
2	PIN	1	BRASS	SILVER
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN	06/23/15
C. ZUNIGA	
CHECKED	
ORJ DRAWN	06/23/15
C. ZUNIGA	

RoHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

4.3/10 MALE TO N MALE ADAPTER

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFD-43M-NM	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		