
Honeywell

High Temperature Analog Multiplexers 16-Channel Single-Ended / 8-Channel Differential HT506 / HT507

The High Temperature HT506/HT507 monolithic multiplexers consist of sixteen analog switches, 4-bit decode for channel selection, reference for logic switching thresholds, and enable pin for device deactivation where applications require. These multiplexers are fabricated with Honeywell's dielectrically isolated latch-up free high temperature (HTMOS[™]) linear process. Performance is specified over the full -55 to +225°C temperature range. Typically, parts will operate up to +300°C for a year, with derated performance. All parts are burned in at 250°C. The input buffers are designed to operate from either TTL or CMOS levels while providing a break-before-make action. The HT506 switches one of the sixteen single-ended inputs to a common output, while the HT507 switches one of the eight differential inputs to a differential output. These parts are available in standard pinout 28-pin DIP Ceramic Packages.

Applications

- > Down-Hole Oil, Gas, and Geothermal Well
- Avionics
- > Turbine Engine Control
- Industrial Process Control
- Electric Power Conversion
- > Heavy Duty Internal Combustion Engine

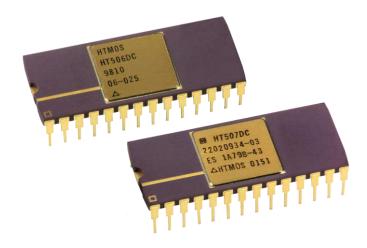

FEATURES AND BENEFITS

- Specified over -55 to +225°C
- 16:1 Single-Ended or 8:1 Differential Configuration
- No latch-up
- On resistance 400Ω at 225°C
- Output leakage less than 2.5µA at 225°C

- Designed to continuously operate for at least 5 years at 225°C
- Enable and address inputs compatible with TTL and/or 5V CMOS logic
- ▶ 10V analog input/output range (±5V or 0 to 10V)
- Split and single supply capability
- Break-Before-Make Switching


HT506/HT507

PACKAGE PINOUTS

PACKAGE PINOUT HT506

28 D V+ 1 27 V-NC 2 NC/5V 3 28 S8 25 S7 S16 4 24 S6 S15 5 S14 6 23 S5 22 S4 S13 7 S12 8 21 S3 20 S2 S11 9 19 S1 S10 10 S9 11 18 EN Decoders/Drivers 17 A0 GND 12 16 A1 NC 13 15 A2 A3 14

PACKAGE PINOUT HT507

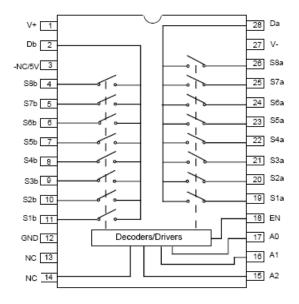

ELECTRICAL CHARACTERISTICS (Split Supply)

Temperature range -55 to +225°C, typical @ +25°C, V+ = +5V, V- = -5V, GND=0V, V_{IL}=0.8, V_{IH} = 2.4V, unless otherwise specified

Symbol	Parameters	Test Conditions	Typical	Worst Case (2)		Units
-,			(1)	MIN	МАХ	
Analog Swit	tch					
VANALOG	Analog Signal Range			-5	5	V
r _{DS(ON)}	Drain-Source On-Resistance	V _D ±5V, I _S = -10mA Sequence Each Switch On 100			400	Ω
$\Delta r_{\text{DS(ON)}}$	r _{DS(ON)} Matching between Channels	$V_D = \pm 5V$	2			%
I _{S(OFF)}	Source Off Leakage Current	$V_{EN} = 0V$	0.01		200	nA
I _{D(OFF)}	Drain Off Leakage Current	V_{D} = ±5V, V_{EN} = 0V, V_{S} = ±5V	0.04	-2500	2500	nA
I _{D(ON)}	Drain On Leakage Current	Sequence Each Switch On	0.04	-2500	2500	nA
Digital Cont	rol					
VIH	Logic High Input Voltage			2.4		V
V _{IL}	Logic Low Input Voltage		0.8			V
I _{IH}	Logic High Input Current	$V_A = 2.4V, 10V$		-1	1	μA
IIL	Logic Low Input Current	$V_{EN} = 0V, 2.4V, V_A = 0V$		-1	1	μA
CIN	Logic Input Capacitance	f=1MHz	7			pF
Dynamic Ch	naracteristics					
ton	Address/Enable Turn-On Time	trise/tfall<50ns		100	400	ns
t _{OFF}	Address/Enable Turn-Off Time	trise/tfall<50ns		30	200	ns
Q	Charge Injection	$C_L=1nF$, $V_S=0V$, $R_S=0\Omega$	TBD			рС
t _{OFF} Q O _{IS}	Off Isolation	$V_{EN} = 0V, R_L = 1k\Omega, f = 100kHZ$	TBD			dB
Power Supp	blies					
l+	Positive Supply Current	$V_{\text{EN}} = V_{\text{A}} = 0V \text{ or } 5V$	50		250	μA
-	Negative Supply Current	$\mathbf{v}_{\rm EN} = \mathbf{v}_{\rm A} = 0 \mathbf{v} \ 0 1 \ 5 \mathbf{V}$	-0.01	-20		μΑ

(1) Typical operating conditions: V + = 5V, V - = -5V, $TA = 25^{\circ}C$.

(2) Worst case operating conditions: $V_{\pm} = +5V \pm 10\%$, $V_{\pm} = -5V \pm 10\%$, TA = -55 to 125°C.

HT506/HT507

ELECTRICAL CHARACTERISTICS (Single Supply)

Temperature range -55 to +225°C, typical @ +25°C, V+ = +10V, GND=V- = 0V, V_{IL}=0.8, V_{IH} = 2.4V, unless otherwise specified

Symbol	Parameters	Test Conditions	Typical	Worst Case (2)		Units
•,			(1)	MIN	MAX	Units V Ω % nA nA nA N V V μA μA pF ns pC μA
Analog Swit	tch					
VANALOG	Analog Signal Range		11			V
DS(ON)	Drain-Source On-Resistance	$V_{\rm D} = 3V, 10V, I_{\rm S} = 1mA$	80		400	Ω
$\Delta r_{DS(ON)}$	r _{DS(ON)} Matching between Channels	Sequence Each Switch On	2			%
S(OFF)	Source Off Leakage Current	$V_{EN} = 0V$	0.01		200	nA
D(OFF)	Drain Off Leakage Current	V _S =0.5V or 10V	0.04	-2500	2500	nA
D(ON)	Drain On Leakage Current	$V_{S}=V_{D}=+10V$ Sequence Each Switch On	0.04	-2500	2500	nA
Digital Cont	trol	· · ·				
VIH	Logic High Input Voltage			2.4		V
/ _{IL}	Logic Low Input Voltage		0.8			V
н	Logic High Input Current	V _A = 2.4V, 10V		-1	1	μA
IL	Logic Low Input Current	$V_{EN} = 0V, 2.4V, V_A = 0V$		-1	1	
CIN	Logic Input Capacitance	f=1MHz	7			pF
Dynamic Ch	naracteristics		-			
ON(EN)	Address/Enable Turn-On Time	trice /tfell_E0ree		100	400	ns
OFF(EN)	Address/Enable Turn-Off Time	trise/tfall<50ns		30	200	
Q	Charge Injection	C _L =1nF, V _S =6, R _S =0	TBD			рС
Power Supp	blies					•
+	Positive Supply Current		50		250	μA
_	Negative Supply Current	$V_{EN} = 0V \text{ or } 5V, V_A = 0V \text{ or } 5V$	-0.01	-20		

(1) Typical operating conditions: V+ = 10V, V- = GND =0V, TA= 25°C.

(2) Worst case operating conditions: $V_{+} = +10V \pm 10\%$, $V_{-} = GND = 0V$, TA = -55 to 125°C.

TRUTH TABLE – HT506

A3	A2	A 1	A 0	EN	On Switch
Х	Х	Х	Х	0	None
0	0	0	0	1	1
0	0	0	1	1	2
0	0	1	0	1	3
0	0	1	1	1	4
0	1	0	0	1	5
0	1	0	1	1	6
0	1	1	0	1	7
0	1	1	1	1	8
1	0	0	0	1	9
1	0	0	1	1	10
1	0	1	0	1	11
1	0	1	1	1	12
1	1	0	0	1	13
1	1	0	1	1	14
1	1	1	0	1	15
1	1	1	1	1	16

TRUTH TABLE – HT507

A2	A 1	A 0	EN	On Switch
X	Х	Х	0	None
0	0	0	1	1
0	0	1	1	2
0	1	0	1	3
0	1	1	1	4
1	0	0	1	5
1	0	1	1	6
1	1	0	1	7
1	1	1	1	8


Logic "0" = VAL $\leq 0.8V$ Logic "1" = VAH $\geq 2.4V$ X =Irrelevent

HT506/HT507


ABSOLUTE MAXIMUM RATINGS

Parameter	Value	Units
Voltages Referenced to V-, V+	+15	V
Digital Inputs VS, VD	-0.5 to VDD +0.5	V
Current (any terminal)	10	mA
Peak Current, S or D, (Pulsed at 1ms, 10% Duty Cycle Max)	15	mA
Storage Temperature	-65 to +325	°C
Power Dissipation (Package)	500	mW
ESD Protection	1000	V

28-LEAD PACKAGE

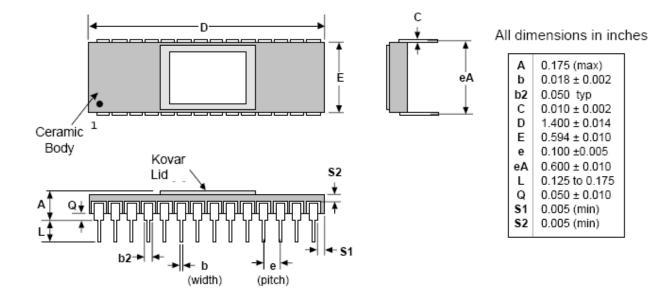

ORDERING INFORMATION

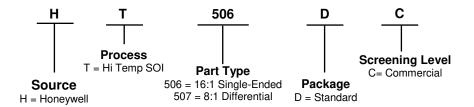

Find out more

For more information on Honeywell's High Temperature Electronics visit us online at <u>www.honeywell.com/hightemp</u> or contact us at 800-323-8295 or 763-954-2474. Customer Service Email: ps.customer.support@honeywell.com.

Honeywell reserves the right to make changes to improve reliability, function or design. Honeywell does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

Honeywell 12001 Highway 55 Plymouth, MN 55441 Tel: 800-323-8295 www.honeywell.com/hightemp

Form #900200 October 2010 ©2010 Honeywell International Inc.

