



**ALPHA & OMEGA**  
SEMICONDUCTOR

**AON6284**

**80V N-Channel MOSFET**

### General Description

The AON6284 uses trench MOSFET technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of  $R_{DS(ON)}$ ,  $C_{iss}$  and  $C_{oss}$ . This device is ideal for boost converters and synchronous rectifiers for consumer, telecom, industrial power supplies and LED backlighting.

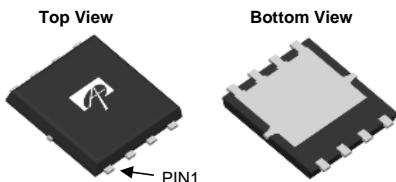
### Product Summary

$V_{DS}$	80V
$I_D$ (at $V_{GS}=10V$ )	78A
$R_{DS(ON)}$ (at $V_{GS}=10V$ )	< 7.1mΩ
$R_{DS(ON)}$ (at $V_{GS}=6V$ )	< 10mΩ


100% UIS Tested  
100%  $R_g$  Tested



DFN5x6



Top View



### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	$V_{DS}$	80	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current	$I_D$	78	A
$T_C=100^\circ\text{C}$		49	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	170	
Continuous Drain Current	$I_{DSM}$	24	A
$T_A=70^\circ\text{C}$		19	
Avalanche Current <sup>C</sup>	$I_{AS}$	40	A
Avalanche energy $L=0.1\text{mH}$ <sup>C</sup>	$E_{AS}$	80	mJ
Power Dissipation <sup>B</sup>	$P_D$	78	W
$T_C=100^\circ\text{C}$		31	
Power Dissipation <sup>A</sup>	$P_{DSM}$	7.4	W
$T_A=70^\circ\text{C}$		4.7	
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C

### Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient <sup>A</sup>	$R_{θJA}$	14	17	°C/W
Maximum Junction-to-Ambient <sup>A,D</sup>		40	55	°C/W
Maximum Junction-to-Case	$R_{θJC}$	1.3	1.6	°C/W

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	80			V
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{DS}=80\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			1 5	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm20\text{V}$			$\pm100$	nA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	2.3	2.8	3.3	V
$I_{\text{D(ON)}}$	On state drain current	$V_{GS}=10\text{V}, V_{DS}=5\text{V}$	170			A
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=20\text{A}$ $T_J=125^\circ\text{C}$		5.9	7.1	$\text{m}\Omega$
		$V_{GS}=6\text{V}, I_D=20\text{A}$		9.5	11.4	
$g_{\text{FS}}$	Forward Transconductance	$V_{DS}=5\text{V}, I_D=20\text{A}$		66		S
$V_{\text{SD}}$	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.71	1	V
$I_S$	Maximum Body-Diode Continuous Current				78	A
<b>DYNAMIC PARAMETERS</b>						
$C_{\text{iss}}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=40\text{V}, f=1\text{MHz}$		2162		pF
$C_{\text{oss}}$	Output Capacitance			300		pF
$C_{\text{rss}}$	Reverse Transfer Capacitance			16		pF
$R_g$	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	0.6	1.35	2.1	$\Omega$
<b>SWITCHING PARAMETERS</b>						
$Q_g(10\text{V})$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=40\text{V}, I_D=20\text{A}$		28	40	nC
$Q_{\text{gs}}$	Gate Source Charge			8.5		nC
$Q_{\text{gd}}$	Gate Drain Charge			4.5		nC
$t_{\text{D(on)}}$	Turn-On Delay Time	$V_{GS}=10\text{V}, V_{DS}=40\text{V}, R_L=2\Omega, R_{\text{GEN}}=3\Omega$		9		ns
$t_r$	Turn-On Rise Time			4.5		ns
$t_{\text{D(off)}}$	Turn-Off Delay Time			23		ns
$t_f$	Turn-Off Fall Time			5		ns
$t_{\text{rr}}$	Body Diode Reverse Recovery Time	$I_F=20\text{A}, dI/dt=500\text{A}/\mu\text{s}$		26		ns
$Q_{\text{rr}}$	Body Diode Reverse Recovery Charge	$I_F=20\text{A}, dI/dt=500\text{A}/\mu\text{s}$		118		nC

A. The value of  $R_{\text{JJA}}$  is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ . The Power dissipation  $P_{\text{DSM}}$  is based on  $R_{\text{JJA}}, t \leq 10\text{s}$  and the maximum allowed junction temperature of  $150^\circ\text{C}$ . The value in any given application depends on the user's specific board design.

B. The power dissipation  $P_D$  is based on  $T_{J(\text{MAX})}=150^\circ\text{C}$ , using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=150^\circ\text{C}$ . Ratings are based on low frequency and duty cycles to keep initial  $T_J=25^\circ\text{C}$ .

D. The  $R_{\text{JJA}}$  is the sum of the thermal impedance from junction to case  $R_{\text{JJC}}$  and case to ambient.

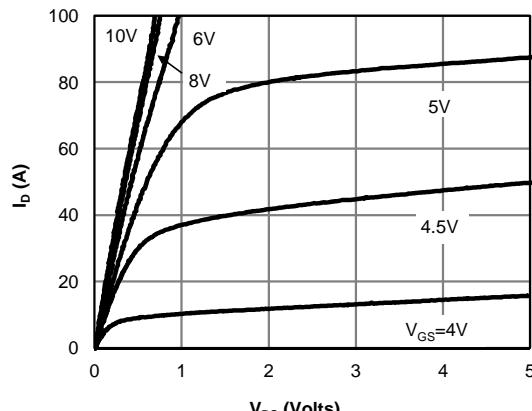
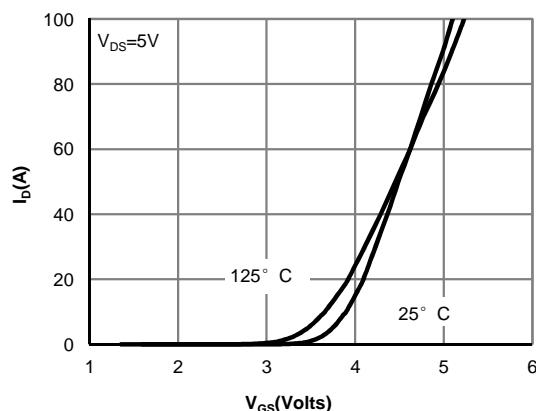
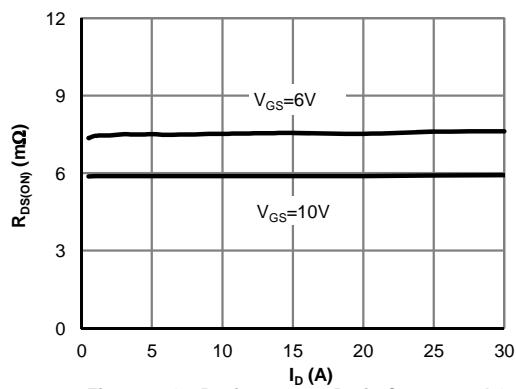
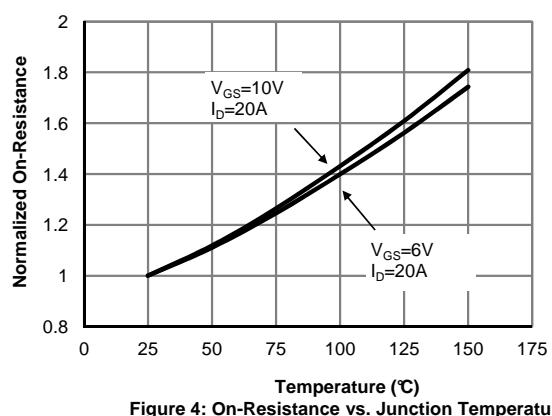
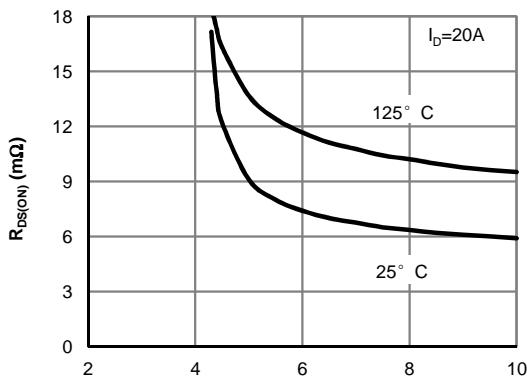
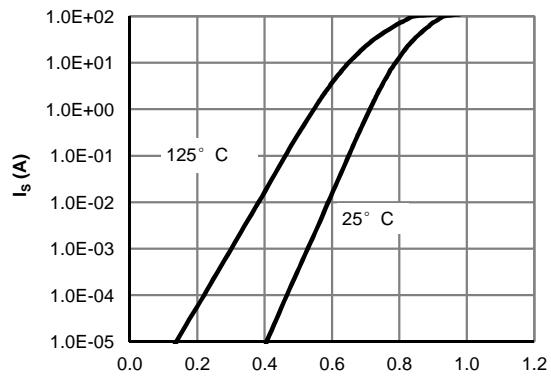
E. The static characteristics in Figures 1 to 6 are obtained using <300μs pulses, duty cycle 0.5% max.

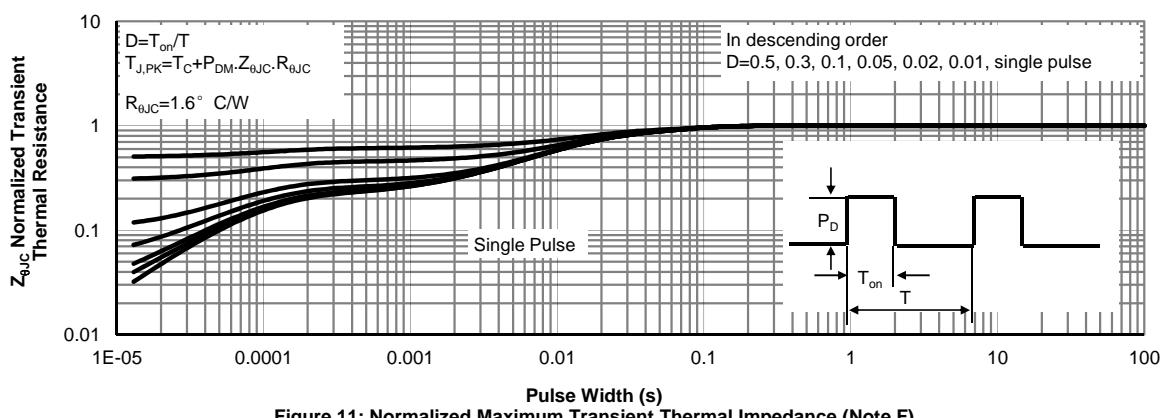
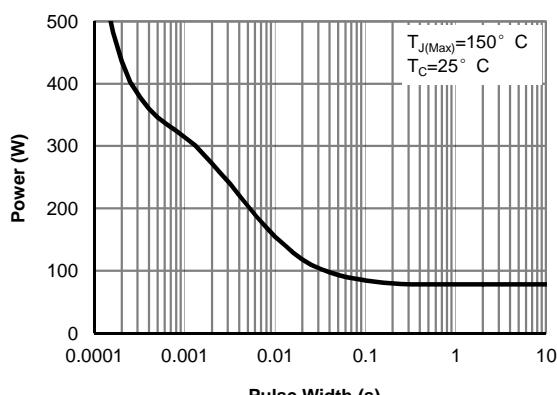
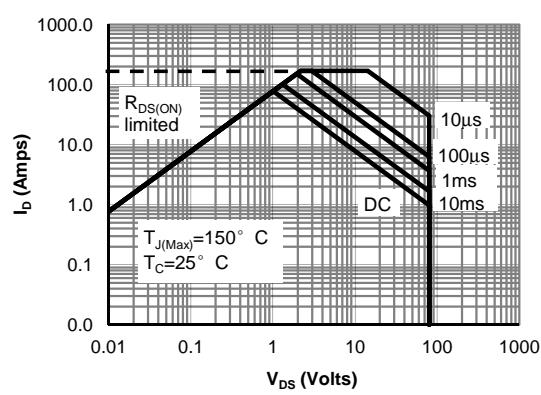
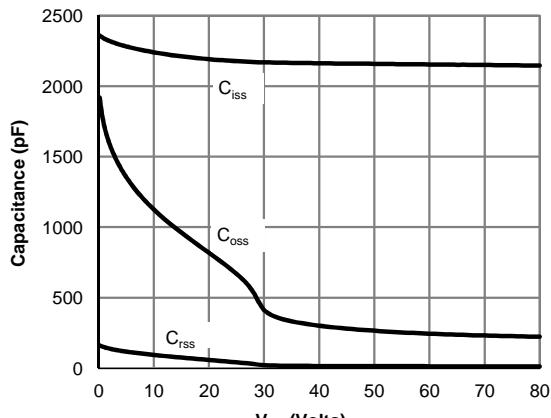
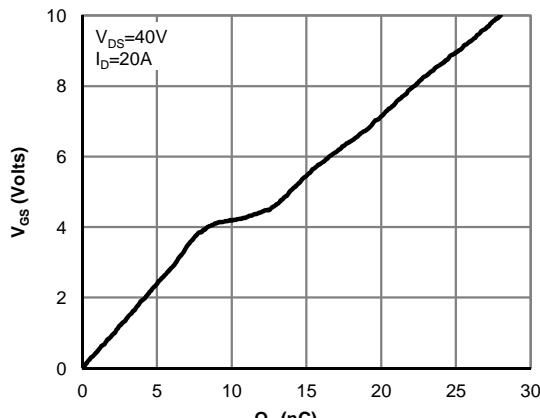
F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of  $T_{J(\text{MAX})}=150^\circ\text{C}$ . The SOA curve provides a single pulse rating.

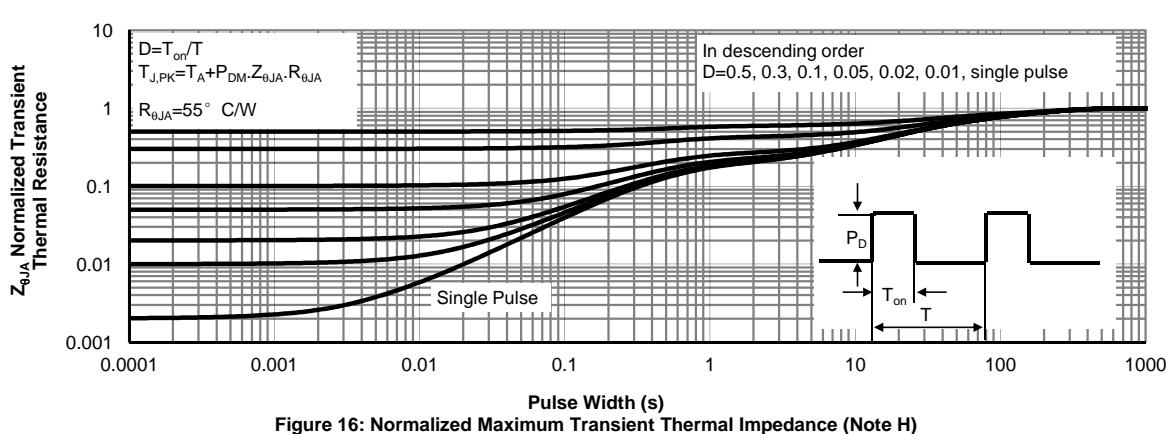
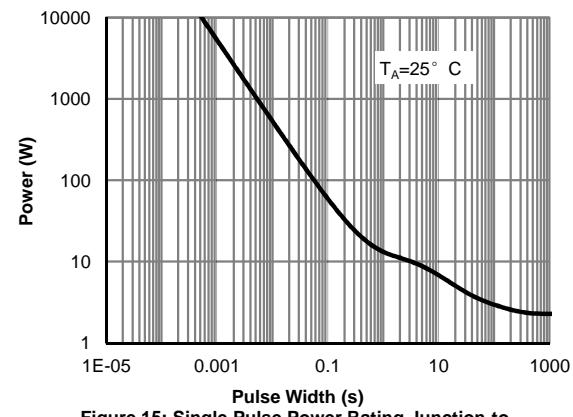
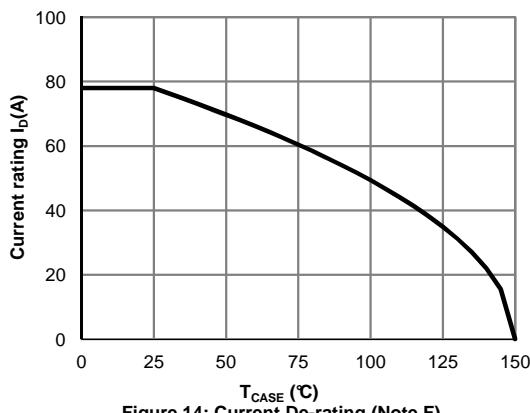
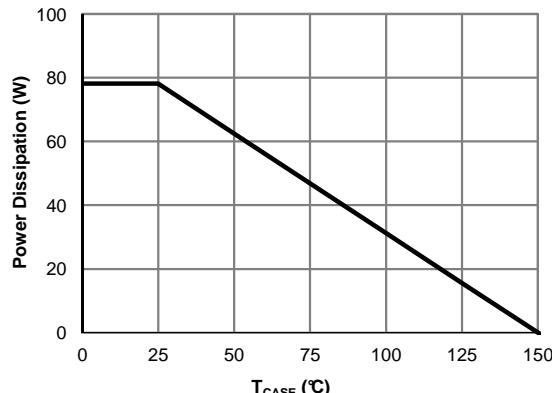
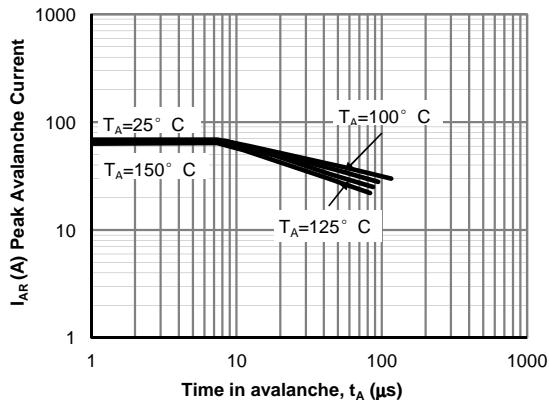
G. The maximum current rating is package limited.

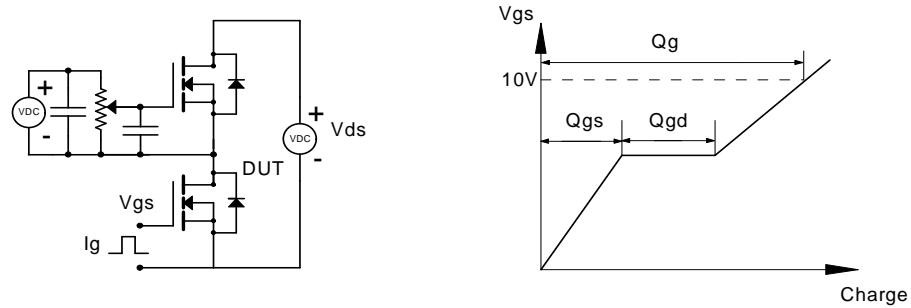
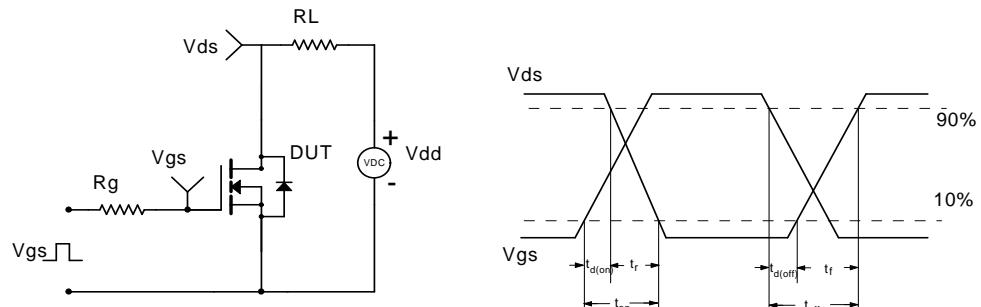
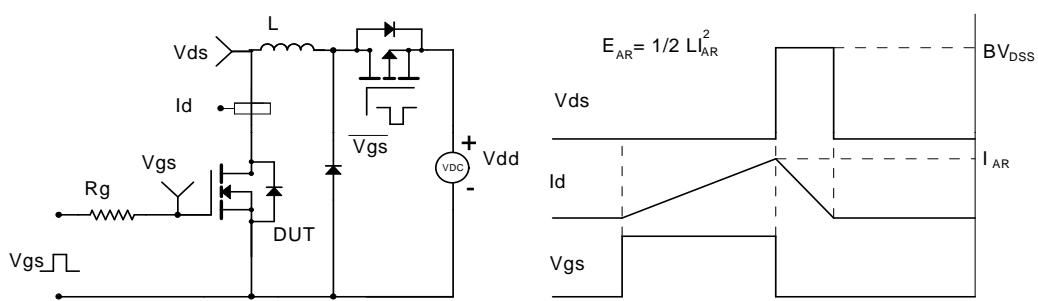
H. These tests are performed with the device mounted on 1 in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ .

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Fig 1: On-Region Characteristics (Note E)**

**Figure 2: Transfer Characteristics (Note E)**

**Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)**

**Figure 4: On-Resistance vs. Junction Temperature (Note E)**

**Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)**

**Figure 6: Body-Diode Characteristics (Note E)**

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


**Gate Charge Test Circuit & Waveform**

**Resistive Switching Test Circuit & Waveforms**

**Unclamped Inductive Switching (UIS) Test Circuit & Waveforms**

**Diode Recovery Test Circuit & Waveforms**
