

## IWR-PORT SERIES

### WIRELESS TO ETHERNET OR RS-232/485 GATEWAY



The IWR-PORT Ethernet Gateway provides a link between wireless sensors and sensor networks and Industrial Ethernet or RS-232/485 networks.

This allows Sensata wireless transmitters to be incorporated into new or existing Industrial Ethernet or RS-232/485 data monitoring and control networks.

The IWR-PORT can interface with standard 10/100Base-T Ethernet networks giving access to the standard MODBUS TCP protocol, ensuring compatibility with most industrial automation systems. MODBUS RTU is available when an RS-232/485 network is used.

#### Features

- 2.4GHz Wireless to Comms Gateway
- Enables easy add-on of wireless networks to existing Ethernet or RS-232/485 systems
- Allows remote sensors to be incorporated into an Ethernet or RS-232/485 network without the need for expensive cabling
- Optional analog & digital outputs can be obtained using SC-ISOSLICE modules



**Ethernet TCP/IP or  
RS-232/485 Communications**

Multiple battery powered sensors transmit data at programmable intervals to an IWR-PORT receiver which can transfer the data onto an Ethernet or RS-232/485 network.

Data from up to 128 nodes can be stored on one IWR-PORT module and up to 16 networks can co-exist together. All parameters are stored as Modbus registers.

#### Installation Detail

<b>Mounting</b>	DIN Rail TS35
<b>Orientation</b>	Any
<b>Connections</b>	Screw clamp with pressure plate
<b>Conductor Size</b>	0.5-4.0mm
<b>Insulation Stripping</b>	12mm
<b>Weight</b>	Approx 120g

Parameter	Min	Typ	Max	Comments
<b>Supply Voltage</b>	16	24V	30	
<b>Supply Current (mA)</b>	100		120	24Vdc supply
<b>Ethernet Interface</b>				10Base-T or 100Base-T
<b>Connector</b>		RJ45		
<b>Protocols</b>				For Ethernet version Modbus TCP/IP or RTU
<b>Rs232 Data Rate</b>	2400	38400	57600	Baud
<b>Date bits</b>		7 or 8		
<b>Parity</b>				Odd / Even / None
<b>Isolation Voltage</b>	1kV			
<b>Operating Ambient</b>	0°C		55°C	
<b>Relative Humidity</b>	0%		90%	
<b>Surge Voltage</b>	2.5kV for 50µS		Transient of 10kV/µS	

Notes: Local LED display can show sensor values in real engineering units and IWR-PORT set-up information

### Connection Details

- 0V
- 16-36 V dc / 16-32 V ac
- Ground
- RS-232 Transmit or RS-485 B -ve
- RS-232 Receive or RS-485 B +ve



### ORDERING OPTIONS


Part Number	Description
<b>IWR-PORT-E</b>	Ethernet
<b>IWR-PORT-232</b>	RS-232
<b>IWR-PORT-485</b>	RS-485
<b>Five Channel Configuration Software*</b>	IWT-IWR Configuration Software (free download*)

\*Free download user configuration software [here](#)



### DIMENSIONS

All dimensions are in millimeters

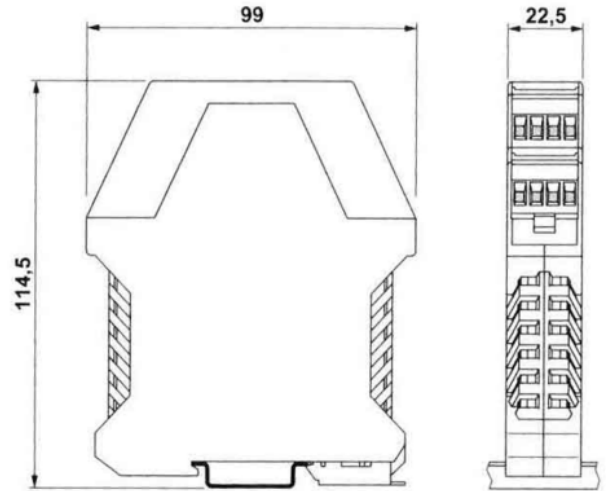

Made in the UK

Page 2

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements, and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com). SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

### CONTACT US

EUROPE  
 +44 (0)1202 897969  
 c3w\_sales@sensata.com  
 Cynergy3 Components Ltd.  
 7 Cobham Road,  
 Ferndown Industrial Estate,  
 Wimborne, Dorset,  
 BH21 7PE, United Kingdom

USA  
 +1 310 561 8092 / +1 866 258 5057  
 c3w\_sales@sensata.com