

# **HKP**

# 1/4" x 1 1/4" Panel-mount fuse holders





# **Product features**

- For 1/4" x 1 1/4" (6.3 mm x 32 mm) fuses
- Maximum panel thickness 5/16" (7.9 mm) thick
- Bayonet-type knob
- Vibration resistant
- Military version is designated FHN26G1
- Standard plastic nut
- Optional metal nut
- Cap BK-9435-1-2
- Neoprene washer 9732

# **Agency information**

- UL Recognized: IZLT2, E14853
- CSA Component Acceptance: Class 6225-01, File 47235
- CE (HKP, HKP-L, HKP-W, HKP-OO)

#### **Environmental data**

- Temperature rating (RTI): The mounting body for all devices has a temperature rating of 150 °C. The knob for these devices are molded plastic with a temperature rating of 150 °C.
- Meets UL 94HB
- Terminal Strength: 5 pounds
- Torque: Mounting 20 inch-pound
- Salt Spray (corrosion): Test condition B

# **Ordering information**

- Specify packaging prefix and product code
- Optional metal nut, order separately part number 1A4806-2 (100 parts minimum)

	Specifications		
Product	Feature	Voltage	Current
code		rating	rating
HKP-R	Standard	250 V	30 A
HKP-BBHH-R	1/4" Quick-Connects, nut and washer assembled	250 V	15 A
HKP-HH-R	1/4" Quick-Connects	250 V	15 A
HKP-L-R	2250 stand-off barrier	250 V	30 A
HKP-LW-HH-R	Drip-proof knob, 2250V stand-off barrier and ¼" quick connects <sup>1</sup>	250 V	15 A
HKP-OO-R	Snap-lock	250 V	30 A
HKP-W-R	Drip-proof knob <sup>1</sup>	250 V	30 A


1. IP53 rating for exposed locations




# Dimensions - in (mm)

Drawing Not to Scale


HKP-BBHH-R, HKP-HH-R, HKP-






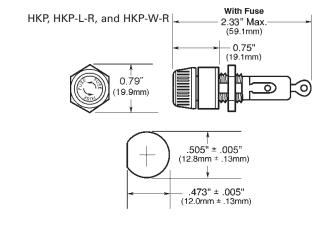

#### **Punched Mounting Hole**



Component	Material
Terminal	Tin-Plated Brass
Body	Thermoset
Cap	Thermoset
Nut	Thermoplastic

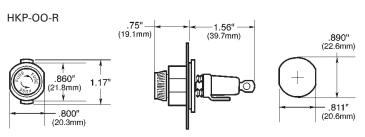

Packaging			
Packaging code prefix	Description		
BK-	100 fuseholder components packed separately into a carton		

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

# Eaton

**Electronics Division** 

1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com/electronics



© 2023 Eaton All Rights Reserved Printed in USA Publication No. 2106 PCN23014M July 2023

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.









